

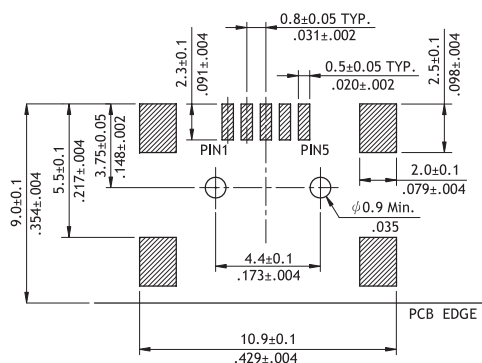
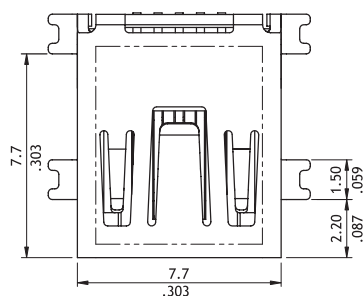


CU04 Series Mini USB2.0 5 Circuits Receptacle SMT Connectors


- ⦿ High temperature plastic Insulator
- ⦿ With fixed tabs and ground pegs
- ⦿ Grounding fingers provide locking feature and plug retention



Recommended P.C. Board Layout

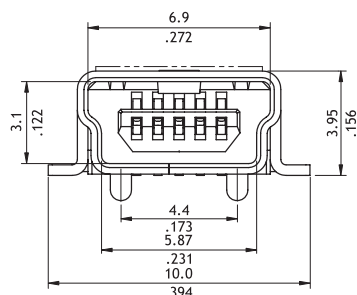

TYPE - B

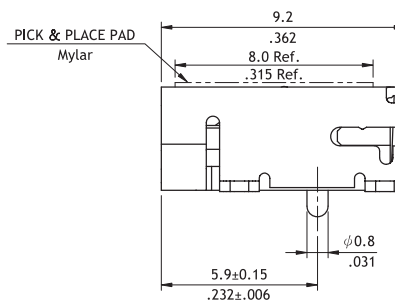

Ordering Code

1 2 3 4 5 6 7 8 9 10
C U 0 4 S A M 1 5 B 0 - R 0 - L F

- | | |
|---|--|
| ① Series No. | ⑥ No. of Circuits: 5 Pin |
| ② S = Receptacle | ⑦ Type: B = B Type |
| ③ Plating Option:
A = Selective Gold flash plated over Nickel | ⑧ Other Option: 0 = Standard |
| ④ Tail Type: M = SMT Type | ⑨ Packing Options:
-R0 = Tape & Reel (with Pick & Place Pad)
-T0 = Tube |
| ⑤ Insulator Color: 1 = Black | ⑩ -LF = For Lead Free IR Process |