




## CU05 Series IEEE 1394 Shielded I/O Receptacle Connectors

- Available right angle and up-right right angle version
- With ground pegs
- Provide the interface for speeds up to 400Mbps
- Full metal shielding for ESD protection
- High temperature plastic housing for SMT processing
- Gold plated leaf contact withstand up to 1500 cycles
- Polarized box shell design and lock grounding fingers ensure plug retention





**RoHS Compliant**

P/N CU05SCH1U00

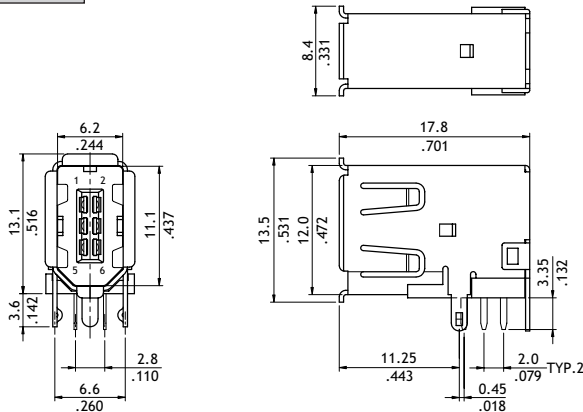

Recommended P.C. Board Layout

P/N CU05S\*H\*F00

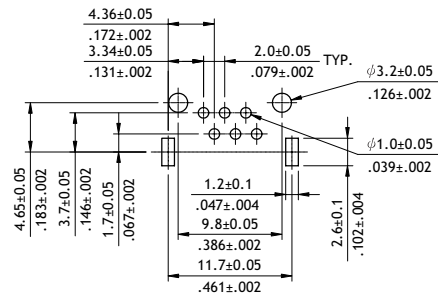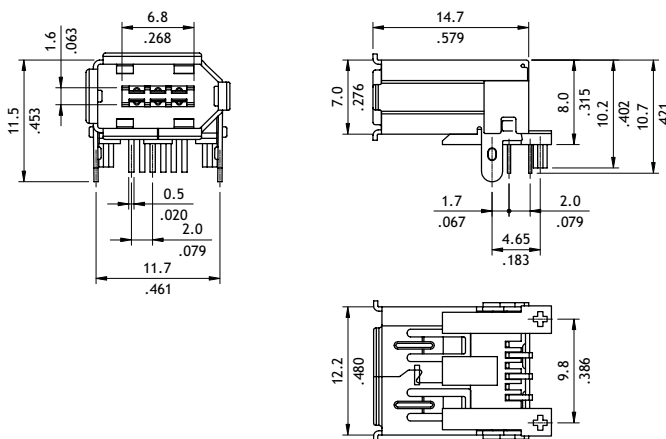

Recommended P.C. Board Layout

### Ordering Code

**1** **2** **3** **4** **5** **6** **7**  
**CU05SCH1F0A**

- 1** Series No.
- 2** S = Socket
- 3** Plating Option:  
C = Selective Gold flash plated over Nickel  
\*Optional plating available but MOQ requested
- 4** Tail Type: H = Side Entry
- 5** Insulator Color: 1 = Black
- 6** Type: F = Flat  
U = Upright
- 7** Other Options: 0A = Standard (Flat)  
00 = Standard (Upright)