

CF37 Series 0.80mm(.031")H=1.95 SMT ZIF One-Touch FFC/FPC Connectors

- 1.95mm above the board
- © FFC/FPC zero insertion force and high holding force
- O Insulation: High temperature plastic UL 94V-0, Color Nature
- Ocover: High temperature plastic UL 94V-0, Color Black
- O Actuator designed easy for FFC/FPC installation and reliable operation
- With metal fixed tabs to secure connector in place







ROHS Compliant







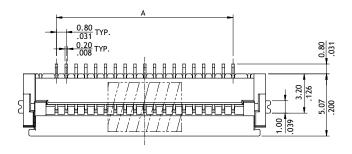





 $A = 0.8 \times No.$ of Spaces B = A + 5.3C = A + 1.66









A±0.08 0.80±0.05 .031±.002

A+1.6±0.10

Recommended P.C. Board Layout

Accommodated FFC/FPC

Ordering Code

- Series No.
- 2 No. of Circuits: 04 to 30 (Available: 4) *Circuits not found above please consult manufacturer*
- C F 3 7
- 3 2
- \mathbf{D}









- 3 Plating Code:
 - 1 = Matte Tin over Nickel 2 = Gold flash over Nickel
- 4 Contact Style:
 - D = Downside contact
- 6 Color: 0 = Nature
- Packing Options: R = Tape & Reel
- Other Options: 0 = Standard

M = With Mylar

*Special options consult manufacturer

3 -NH = For Lead Free IR process and Halogen-Free

