




CI11 Series 1.00mm(.039") Single Row Wire to Board SMT Headers

- Polarization and Low-profile
- Locking slots provide secure mating
- Fixed tabs provide PCB hold-down
- Mate with CI11 housing
- With Tin plated SMT type contact

RoHS Compliant




Top Entry

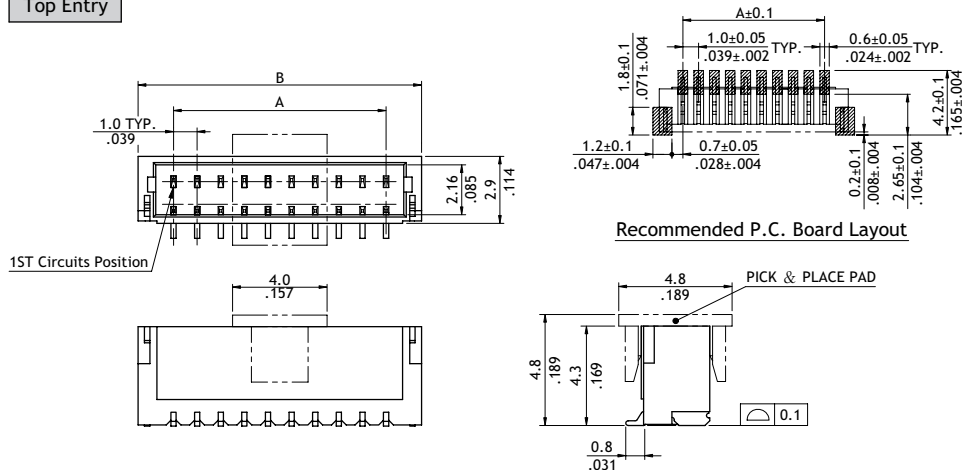

Recommended P.C. Board Layout

Side Entry

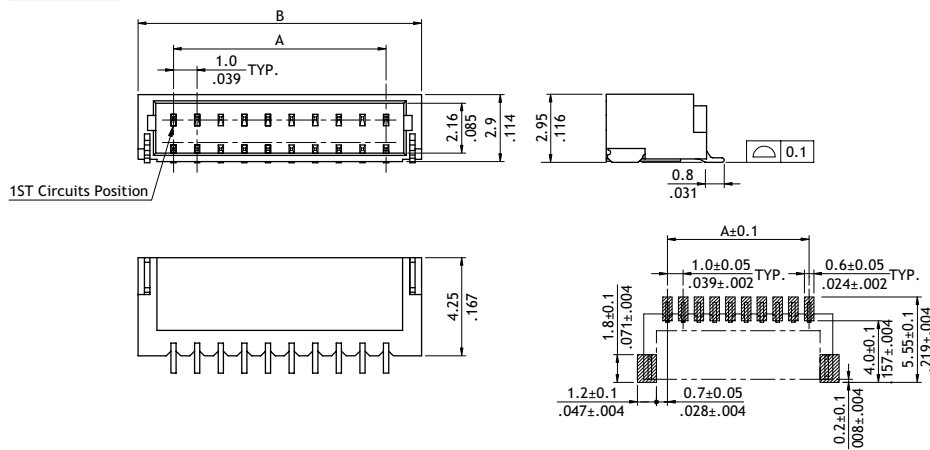

Recommended P.C. Board Layout

Circuits	Dimension	
	A	B
2	1.0(.039)	4.0(.157)
3	2.0(.079)	5.0(.197)
4	3.0(.118)	6.0(.236)
5	4.0(.157)	7.0(.276)
6	5.0(.197)	8.0(.315)
7	6.0(.236)	9.0(.354)
8	7.0(.276)	10.0(.394)
9	8.0(.315)	11.0(.433)
10	9.0(.354)	12.0(.472)
11	10.0(.394)	13.0(.512)
12	11.0(.433)	14.0(.551)
13	12.0(.472)	15.0(.591)
14	13.0(.512)	16.0(.630)
15	14.0(.551)	17.0(.669)
18	17.0(.669)	20.0(.787)
20	19.0(.748)	22.0(.866)
26	25.0(.984)	28.0(1.102)

Ordering Code

① CI ② 11 ③ M ④ 1 ⑤ V ⑥ R0 - ⑦ NH

① Series No.

② No. of Circuits:
02 to 15, 18, 20, 26

③ M = SMT Type

④ Plating Code: 1 = Matte Tin over Nickel

⑤ Type: V = Top Entry
H = Side Entry

⑥ Packing Options:

R0 = Tape & Reel

(Top entry type with pick & place pad)

T0 = Tube

⑦ -LF = For Lead Free soldering process

-NH = For Lead Free soldering process and
Halogen-Free