

Cl44 Series 1.25mm(.049") Wire to Board Connectors SMT Headers

- O Polarization and Low-profile
- O Locking slots provide secure mating
- O Fixed tabs provide PCB hold-down and strain-relief for SMT
- Mate with CI44 Housing
- O Insulator: High temperature plastic UL 94V-0, Color Nature
- With Tin plated SMT type contact



Top Entry


















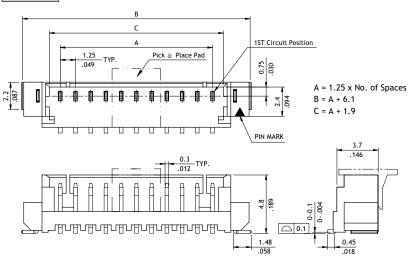



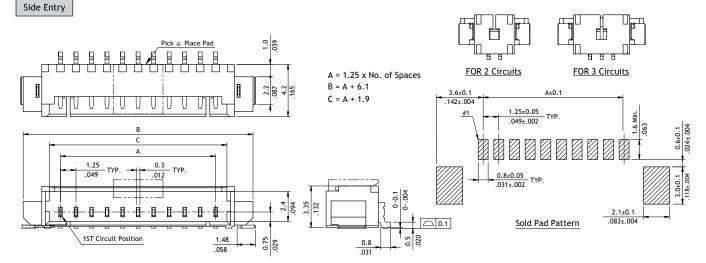

Ordering Code

C I 4 4

2

3

6

6 R0



- Series No.
- 2 No. of Circuits: 02 to 15
- 3 M = SMT Type
- Plating Code:

1 = Matte Tin over Nickel plated

6 Type: V = Top Entry H = Side Entry **6** Other Options:

00 = Standard (Tube packing)

R0 = Tape & Reel (Without Pick & Place Pad)

RP = Tape & Reel (With Pick & Place Pad)

7 -NH = For Lead Free soldering process and Halogen-Free

*Special options consult manufacturer