

SEC.: X-X'

Material :

- \* Body : High temperature plastic UL 94V-0, Color Nature
- \* Slider : High temperature plastic UL 94V-0, Color Black
- \* Contact : Phosphor Bronze With Matte Tin plated
- \* Fixed tab : Brass, with Matte Tin plated


Halogen-Free  
Lead Free Process  
RoHS Compliant

			 2010.10.19 ISSUED		DATE	UNIT: mm / inch	TITLE: 1.00mm(.039") ZIF FFC/FPC DOWNSIDE CONTACT SLIM SURFACE MOUNT CONNECTOR	 瀚荃股份有限公司 CviLux Corporation			
				DRAWN BY: Una	10/12-10'	TOLERANCE UNLESS OTHERWISE SPECIFIED					
				ENGINEER: Clark	10/15-10'	.X ± 0.15/.006					X* ± 1*
				CHECKED BY: Eisley	10/15-10'	.XX ± 0.10/.004					.X* ±
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	10/15-10'	.XXX ± 0.05/.002	FINISH:	DRAWING NO. CF2338SA	PART NO. CF2306*DO*0-10-NH	SCALE 8 / 1	SHEET 1 OF 3


### Ordering Code

CF23 06 1 D 0 \* 0 -10 -NH  
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② No. of Circuits
- ③ Plating code:  
 1= 3.05μm(120μ") Min. Tin  
 over 0.76μm(30μ") Nickel(Matte Tin Finish)  
 2= Gold flash plated over 50μ"min. Nickel
- ④ Contact style: D= Downside contact
- ⑤ Color: 0= Nature
- ⑥ Packing option: R= Tape & Reel  
 T= Tube Packing
- ⑦ Option: 0= With Logo
- ⑧ Other option:  
 -10= Pitch 1.0mm
- ⑨ -NH= For Lead Free IR Processes  
 and Halogen-Free

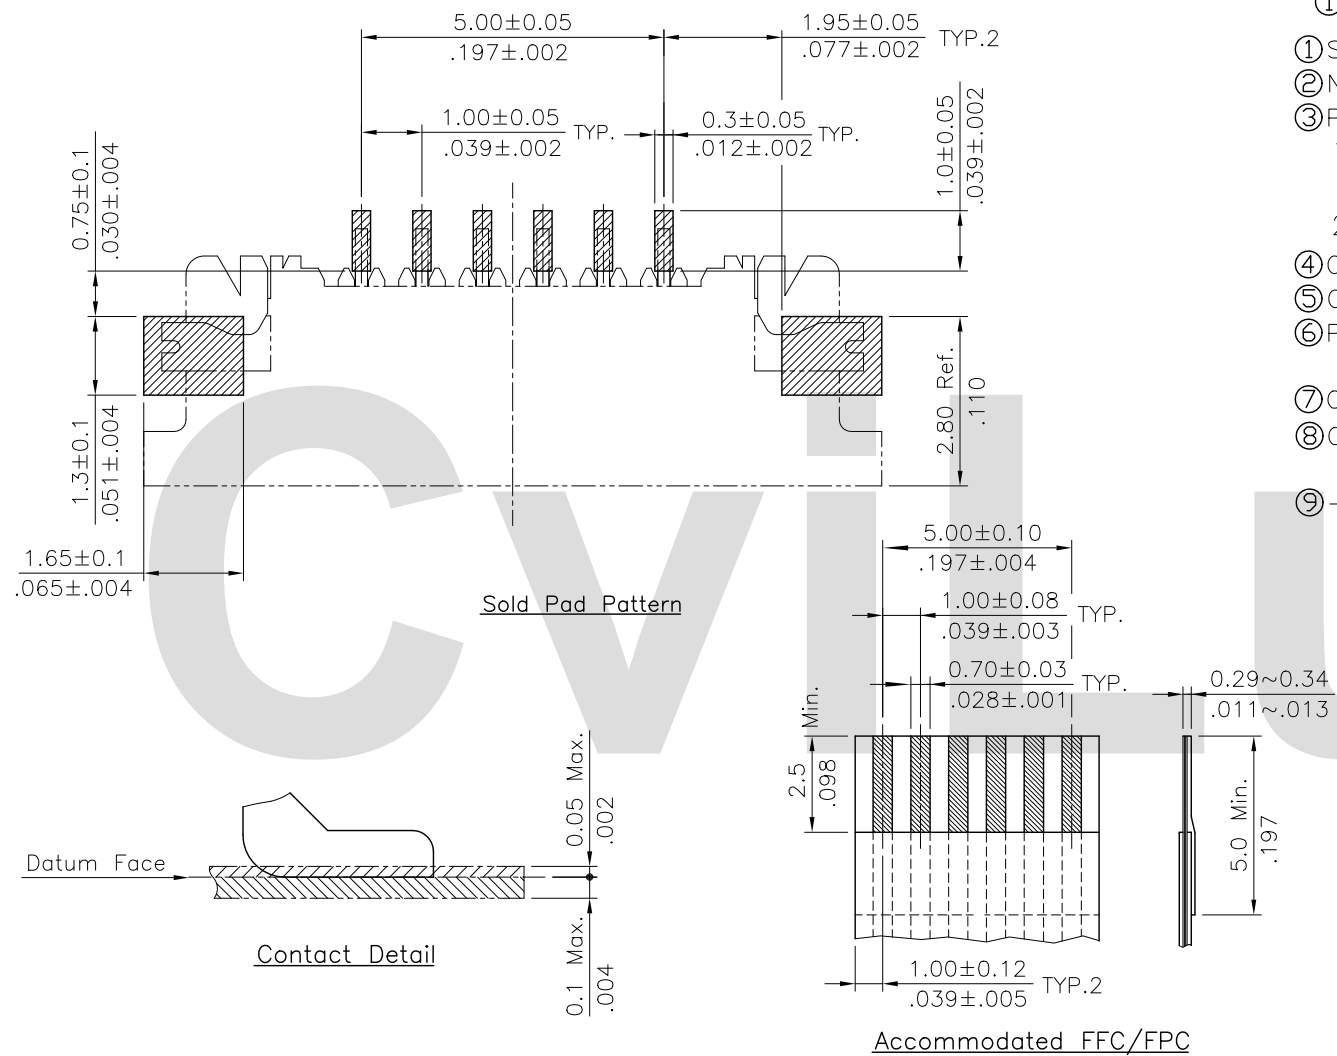


Halogen-Free  
 Lead Free Process  
 RoHS Compliant

④					DATE	UNIT: mm / inch	TITLE: 1.00mm(.039") ZIF FFC/FPC DOWNSIDE CONTACT SLIM SURFACE MOUNT CONNECTOR	 瀚荃股份有限公司 CviLux Corporation
③				DRAWN BY: Una	10/12-10'	TOLERANCE UNLESS OTHERWISE SPECIFIED		
②				ENGINEER: Clark	10/15-10'	.X ± 0.15/.006 X* ± 1'		
①				CHECKED BY: Eisley	10/15-10'	.XX ± 0.10/.004 .X* ±		
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	10/15-10'	.XXX ± 0.05/.002 .XX* ±	MATERIAL:	DRAWING NO. CF2338SA
							FINISH:	PART NO. CF2306*DO*0-10-NH
								SCALE 8 / 1
								SHEET 2 OF 3



 CVILUX CORP  
 2010.10.19  
 ISSUED

NOTES:

- 10 sprocket hole pitch cumulative tolerance  $\pm 0.20$ .
- Carrier camber is within 1 mm in 250 mm.
- Material : Clear, Transparent Polystyrene Alloy (UP-6000).
- All dimensions meet EIA-481-B requirements.
- Thickness :  $0.40 \pm 0.05$  mm.
- Packing length per 22" reel : 98.5 Meters.
- Component load per 13" reel : 4000 pcs.

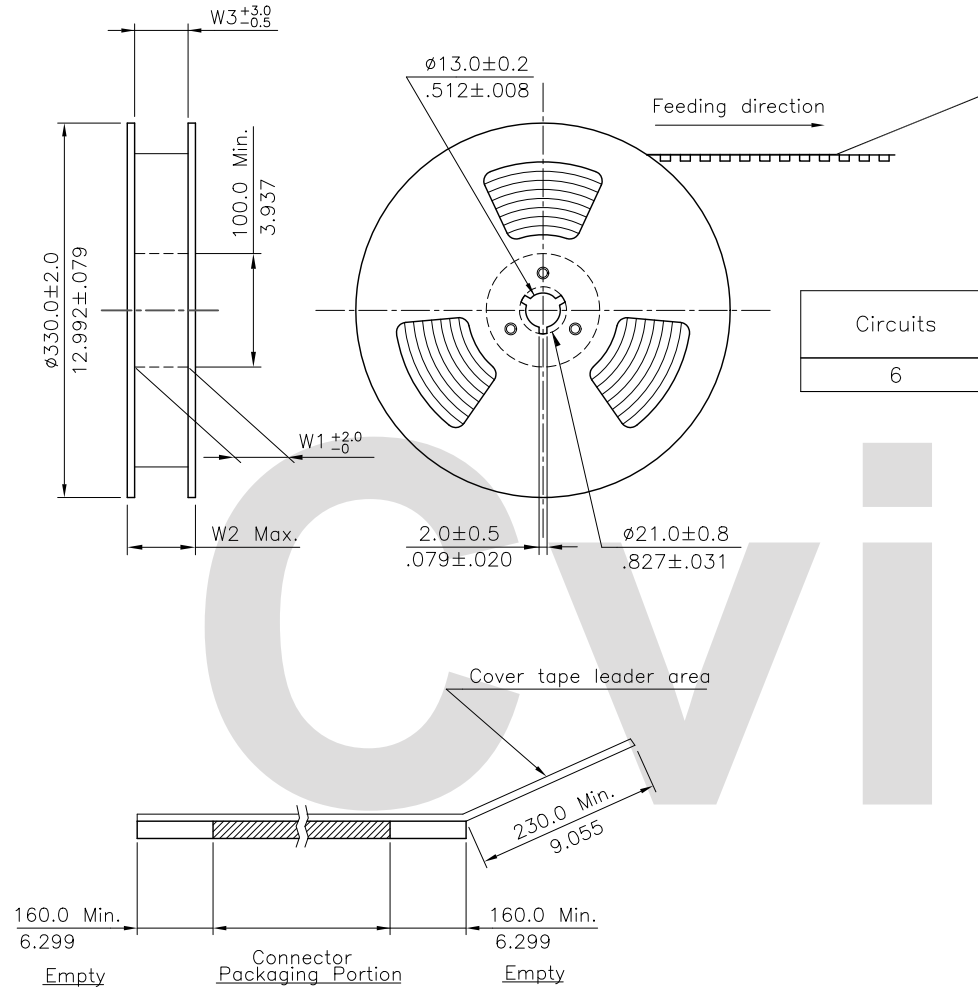


Circuits	Dimension					Packing (Reel/Caton)
	E	F	W1	W2	W3	
6	24.0(.945)	-	24.5(.965)	30.5(1.201)	24.5(.965)	9

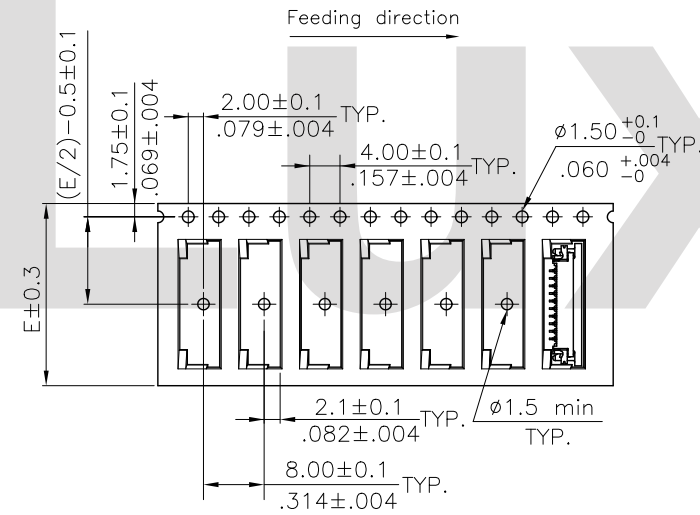

WIDTH : 24 mm Carrier

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 1.00mm(.039") ZIF FFC/FPC DOWNSIDE CONTACT SLIM SURFACE MOUNT CONNECTOR	 瀚荃股份有限公司 CviLux Corporation
3					DRAWN BY: Una	TOLERANCE UNLESS OTHERWISE SPECIFIED		
2					ENGINEER: Clark	.X ±	MATERIAL:	DRAWING NO. CF2338SA
1					CHECKED BY: Eisley	.XX ±	FINISH:	PART NO. CF2306*D0*0-10-NH
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	10/15-10'	.XXX ±		SCALE
								SHEET 3 OF 3

CVILUX CORP  
 2010.10.19  
 ISSUED