



Notes:

1. 10 sprocket hole pitch cumulative tolerance ± 0.2
2. Camber not to exceed 1mm in 100mm.
- △3. Material: Advantek Polystyrene.
4. Pocket position relative to sprocket hole measured as true position of pocket, not pocket hole.
5. All dimensions meet EIA-481-B requirements.
6. Quantity: 2000 PCS/REEL

Circuits	Dimension					Packing (Reel/Caton)
	E	F	W1	W2	W3	
4-5	16.0(.630)	7.50(.295)	16.5(.650)	22.5(.885)	16.5(.650)	11
6-15	24.0(.945)	11.50(.453)	24.5(.965)	30.5(1.200)	24.5(.965)	9
16-21	32.0(1.260)	14.20(.559)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
22-35	44.0(1.732)	20.20(.795)	44.5(1.752)	50.5(1.988)	44.5(1.752)	5
36-40	56.0(2.205)	26.2(1.031)	56.5(2.224)	62.5(2.460)	56.5(2.224)	4

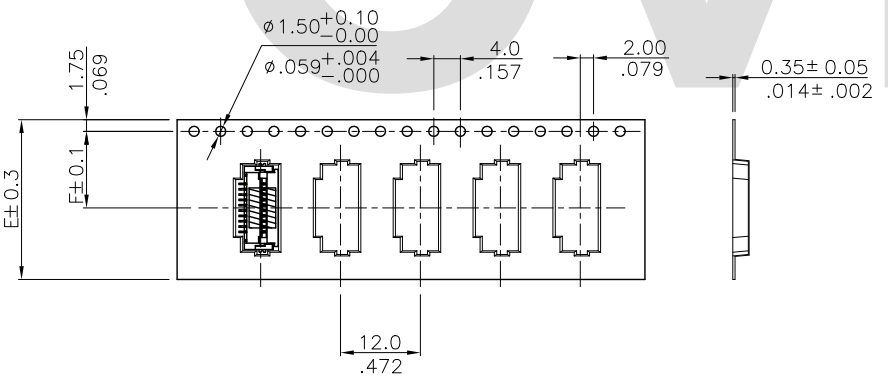


WIDTH : 16 , 24 mm Carrier

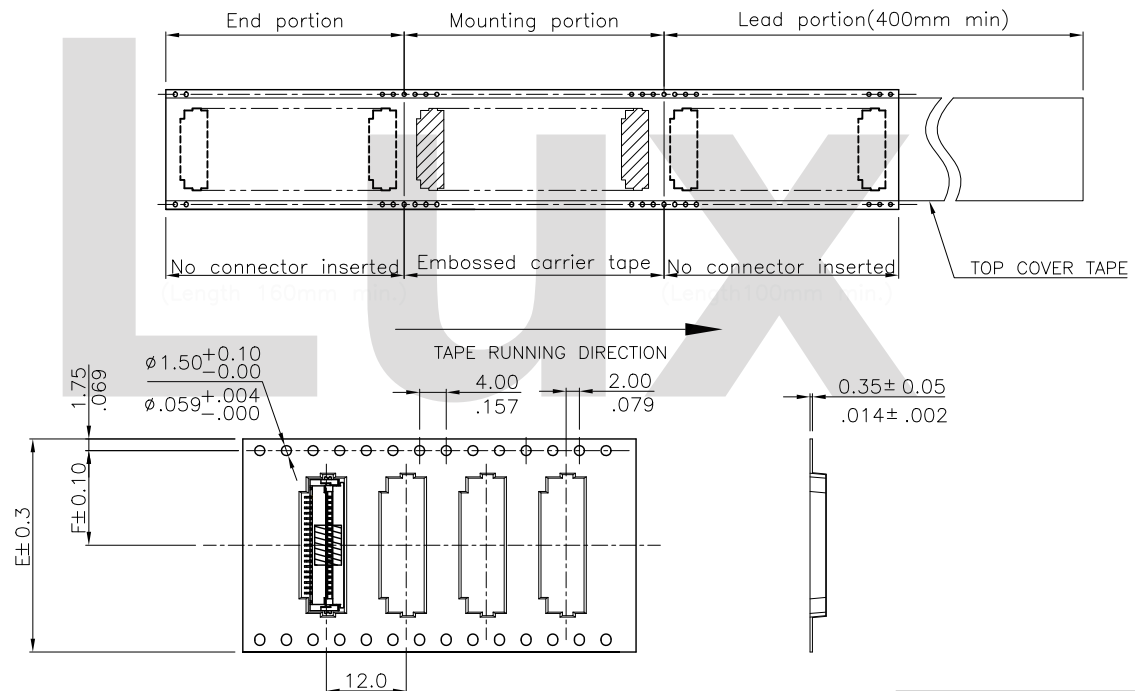

WIDTH : 32, 44, 56 mm Carrier

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 0.80mm(.031") ZIF FFC/FPC ONE-TOUCH CONNECTOR	 瀚荃股份有限公司 CviLux Corporation	DRAWING NO. CF3701SB	PART NO. CF37***D0*M-NH
3				2012.07.12	7/6-12'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:			
2				ISSUED	7/6-12'	.X $\pm 0.15/006$	FINISH:			
1	Claire	7/6-12'	ECR12043-5/ECN12037-5/ECR12048-5		7/9-12'	.XX $\pm 0.10/004$				
SYM	NAME	DATE	REVISIONS		APPROVED BY:	.XXX \pm				

CIVILUX CORP
 2012.07.12
 ISSUED