

A = 2.54 \* No. of Spaces  
 B = A + 2.36  
 \* Available in 2 through 40 circuits



Notes:

- \* Material:  
 Contact: Brass
- \* Pin overall Length 30.0mm Max.

Ordering Code

CH34    \*\*   \*   V   A   \*\*   -NH  
 ①    ②   ③   ④   ⑤   ⑥   ⑦

- ① Series No.
- ② No. of Circuits
- ③ Plating Code:  
 1= 3.05 μm(120 μ") Min. Tin  
 over 0.76 μm(30 μ") Nickel  
 2= Gold flash plated  
 over 1.27 μm(50 μ") Nickel
- ④ V= Straight
- ⑤ Insulation: A= Nylon 6T UL 94V-0, Color Black
- ⑥ Pin Length Option cord:  
 See Table PDF. File No. CH3401T
- ⑦ -NH= For Lead Free IR Processes  
 and Halogen-Free

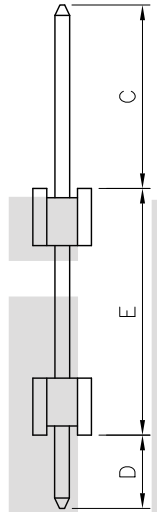

Recommended P.C. Board Layout

Halogen-Free  
 Lead Free Process  
 RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 2.54MM(.100") SINGLE ROW DUAL BODY BOARD MOUNT PIN HEADER	瀚荃股份有限公司 CviLux Corporation
3				DRAWN BY: Karen	11/10-10'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
2				ENGINEER: Clark	11/11-10'	.X ± 0.30/.012    .X' ± 1"		
1				CHECKED BY: David	11/11-10'	.XX ± 0.20/.008    .X' ±	FINISH:	
SYM	NAME	DATE	REVISIONS	APPROVED BY: David	11/11-10'	.XXX ± 0.10/.004    .XX' ±		

CVILUX CORP  
 2010.11.23  
 ISSUED

DRAWING NO.	CH3405SA	PART NO.	CH34***VA**-NH
SCALE	3 / 1	SHEET	1 OF 1