



Notes:

- * Material:
Contact: Brass
- * Pin overall Length 30.0mm Max.
- * For Lead Free Wave Flow Process

Ordering Code

CH71 ** * H * ** -NH
① ② ③ ④ ⑤ ⑥ ⑦


- ① Series No.
- ② No. of Circuits
- ③ Plating Code:
1 = 3.05 μ m(120 μ ") Min. Matte Tin
over 0.76 μ m(30 μ ") Nickel
2 = Gold flash plated
over 1.27 μ m(50 μ ") Nickel
- ④ H= Right angle
- ⑤ Insulation:
A= Nylon 6T UL 94V-0, Color Black
- ⑥ Pin Length Option code:
See Table PDF. File No. CH7102T
- ⑦ -NH= For Lead Free Wave Processes and
Halogen-Free

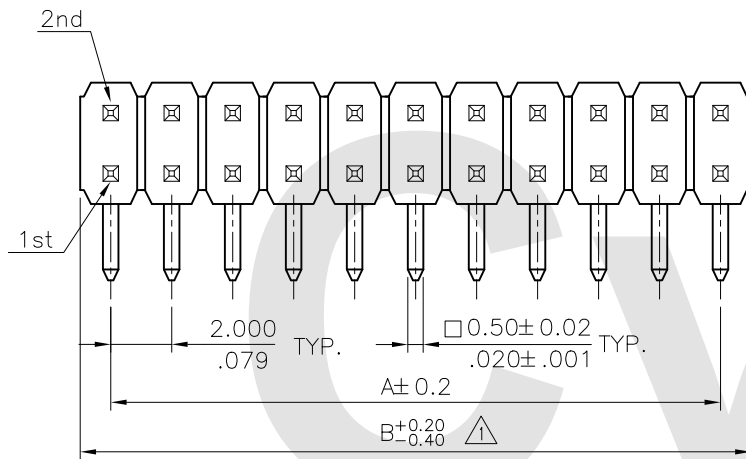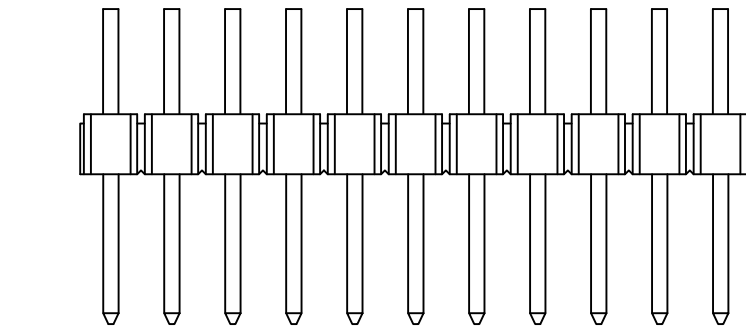

A = 2.00 * No. of Spaces

B = A + 2.00

* Available in 4 through 80 circuits

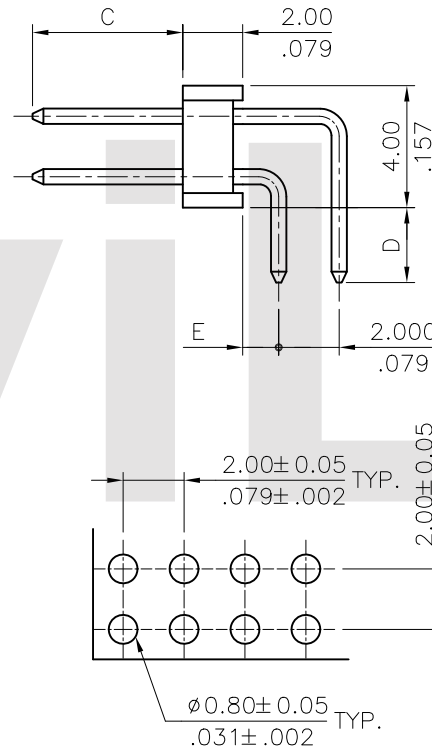

Recommended P.C. Board Layout

Halogen-Free

Lead Free Process

RoHS compliant

4				CIVILUX CORP 2016.12.22 ISSUED			DATE	UNIT: mm / inch	TITLE: 2.00MM(.079") RIGHT ANGLE	瀚荃股份有限公司 CviLux Corporation				
3					DRAWN BY:	Aaron	12/06-16'	TOLERANCE UNLESS OTHERWISE SPECIFIED	DUAL ROW BOARD MOUNT PIN HEADER		MATERIAL:			
2					ENGINEER:	Sun	12/07-16'							
1	Aaron	10/21-16'	ECNT116250/ECRB116072		CHECKED BY:	Eisley	12/16-16'							
SYM	NAME	DATE	REVISIONS		APPROVED BY:	Eisley	12/16-16'	.X ± 0.30 / .012	X' ± 1"		DRAWING NO.	CH7107AC	PART NO.	CH71***HA**-NH
								.XX ± 0.20 / .008	X" ±	FINISH:	SCALE	4 / 1	SHEET 1 OF 1	
								.XXX ± 0.10 / .004	.XX' ±					