


Ordering Code

$\frac{13W3}{①}$
 $\frac{S}{②}$
 $\frac{C}{③}$
 $\frac{H}{④}$
 $\frac{3}{⑤}$
 $\frac{2}{⑥}$
 $\frac{1}{⑦}$
 $\frac{75}{⑧}$
 $\frac{I10}{⑨}$

- ① Series No.
- ② Connector Type: S= Receptacle
- ③ Contact type: C= Coaxial Contact
- ④ Contact tail style: H= Right Angle Dip type
- ⑤ Coaxial contact plating:
 - 2= Gold flash plated over Nickel
 - 3= 15 μ " Gold plated over Nickel
 - 4= 30 μ " Gold plated over Nickel
 - 5= 50 μ " Gold plated over Nickel
- ⑥ Signal contact plating:
 - 2= Gold flash plated over Nickel
 - 3= 15 μ " Gold plated over Nickel
 - 4= 30 μ " Gold plated over Nickel
- ⑦ Insulator color: 1= Black, 6= Green
- ⑧ Performance: 50= 50 Ω , 75= 75 Ω
- ⑨ Mounting Style:
 - 000= With $\phi 3.05$ mm holes on shell
 - B00= Riveted #4-40 UNC open nuts on front shell
 - C00= Riveted #4-40 UNC open nuts on rear shell
 - I00= Riveted #4-40 UNC ground tabs with $\phi 3.2$ mm holes
 - I10= Riveted #4-40 UNC ground tabs with board locks(standard)

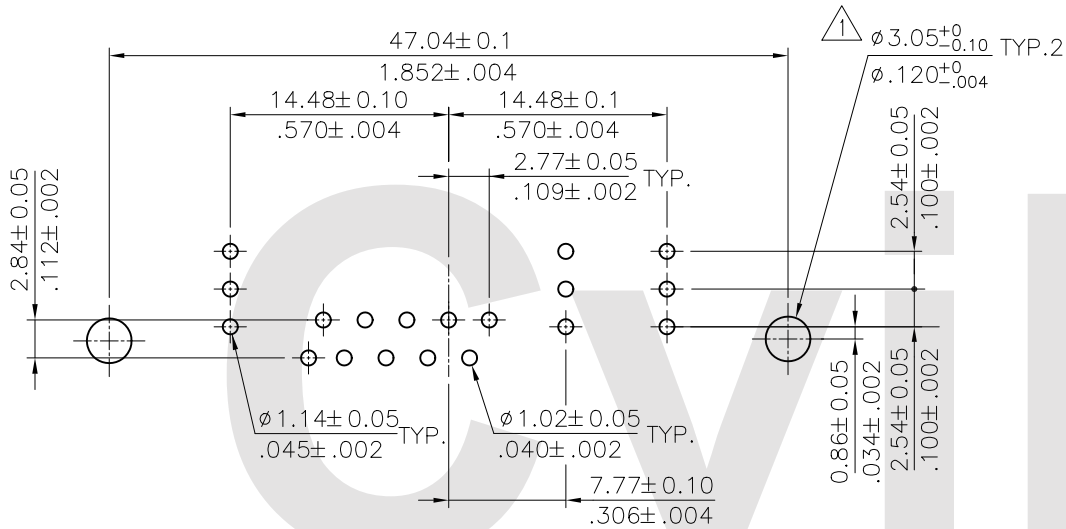

Recommended P.C Board Layout

Lead Free Process

RoHS Compliant

Mounting Style		Mounting Style		Mounting Style		Mounting Style		Mounting Style	
Code	000	Code	B00	Code	C00	Code	I00	Code	I10
			DIM. L= 4.0mm		DIM. L= 4.0mm		$\phi A=3.2$ mm		

④																			
③																			
②																			
①	Karen	4/18-17'	ECNT117049/ECRT117003																
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	4/21-17'	UNIT: mm / inch	TITLE: 13W3 COAXIAL FEMALE D-SUB CONNECTOR (RIGHT ANGLE PCB MOUNT TYPE)		瀚荃股份有限公司 CviLux Corporation		DRAWING NO.	13W306SC	PART NO.	13W3SCH*****				
							TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:		FINISH:		SCALE	2 / 1	SHEET	2 OF 2				
							.X ± 0.30/012	.X' ± 1'											
							.XX ± 0.20/008	.X' ±											
							.XXX ± 0.10/004	.XX' ±											

CVILUX CORP
 2017.04.27
 ISSUED