
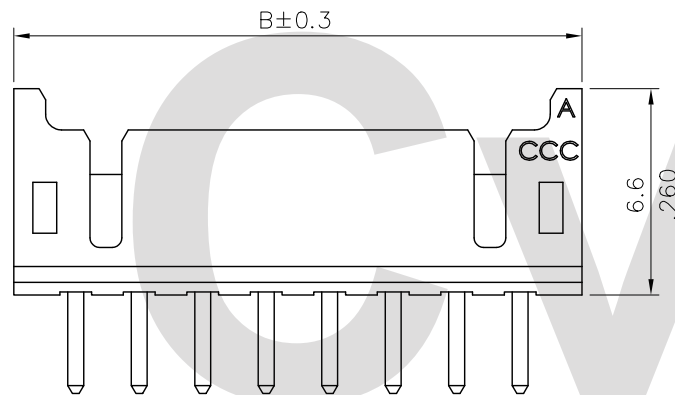


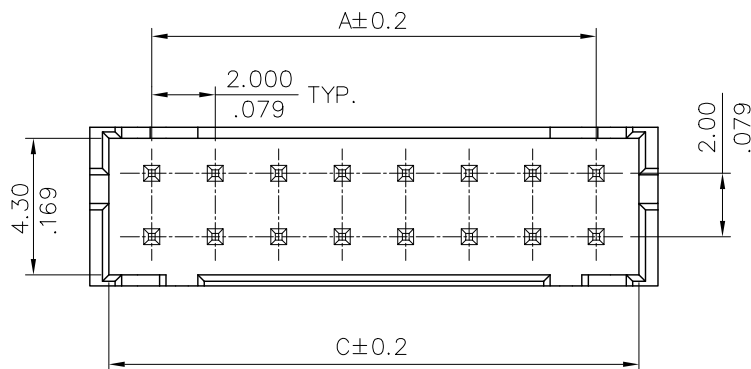

A = 2.0 x (No. of Circuits/2-1)
 B = A + 3.9
 C = A + 2.7
 * Available in 6 through 34 circuits

Note:

1. Material:

* Insulation: Nylon 6T+30% G.F.
 UL94V-0 (Halogen-Free)

* Contact: Brass

① 2. For Lead Free Wave flow Process

Ordering Code:

CI01 ** P * V D 0 - NH
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No.

② No. of Circuits

③ Contact type: P= Pin Header

④ Plating option:

1= 3.05μm (120μ") Matte Tin
 over 0.76μm(30μ") Nickel



2= Gold Flash plated over
 1.27μm(50μ") Nickel

⑤ Type: V= Straight

⑥ Other Option: D= Dual row (Standard)

⑦ Color: 0= Nature

⑧ -NH= For Lead Free Wave flow Process
 and Halogen-Free

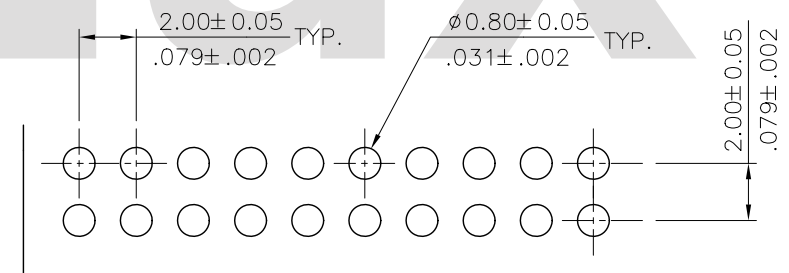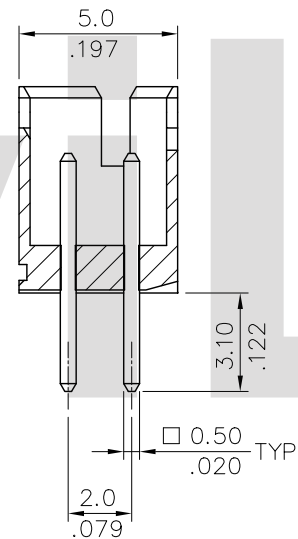

Recommended P.C. Board Layout

Lead Free Process

Halogen-Free

RoHS compliant

④				CIVILUX CORP 2013.05.07 ISSUED		DATE	UNIT: mm / inch		TITLE: 2.00mm PIN HEADER DIP TYPE	 瀚荃股份有限公司 CviLux Corporation			
③					DRAWN BY: Enya	3/07-13'	TOLERANCE UNLESS OTHERWISE SPECIFIED						
②					ENGINEER: Eisley	3/12-13'	.X ± 0.30/.012 .XX ± 0.20/.008 .XXX ± 0.10/.004	X' ± 1' .X' ± .XX' ±	MATERIAL:				
⑤	Enya	3/7-13'	ECN13056-0/ECR13007-1		CHECKED BY: Eisley	3/12-13'				FINISH:			
SYM	NAME	DATE	REVISIONS	APPROVED BY: David	3/12-13'					DRAWING NO. CI0129SB	PART NO. CI01**P*VDO-NH	SCALE 3 / 1	SHEET 1 OF 1