

Note:

1. Material:

△ * Insulation: High Temperature Plastic UL 94V-0

* Contact: Brass

△ 2. For Lead Free Wave flow Process

Ordering Code:

CI01 ** P * V D * - LF
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No.

② No. of Circuits

③ Contact type: P= Pin Header

④ Plating option:

1= 3.05μm (120μ") Matte Tin

over 0.76μm(30μ") Nickel

2= Gold Flash plated over





1.27μm(50μ") Nickel

⑤ Type: V= Straight

⑥ Other Option: D= Dual row (Standard)

⑦ Color: 0= Nature; 1= Black; 9= Gray

△ ⑧ -LF= For Lead Free Wave Flow Process

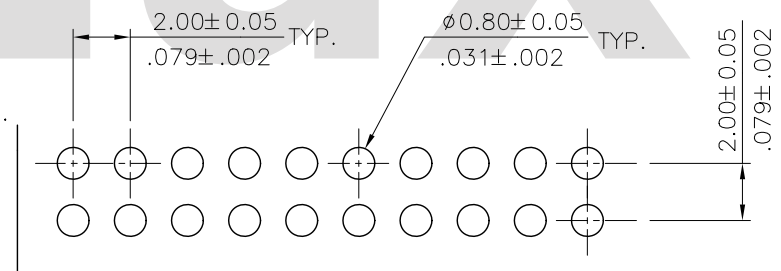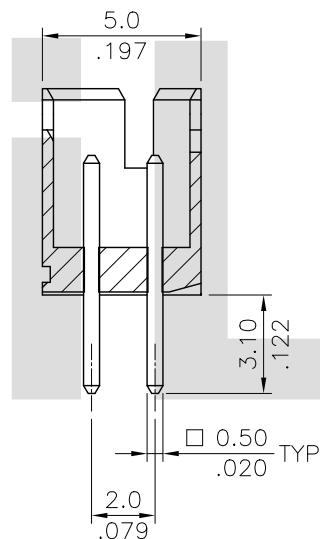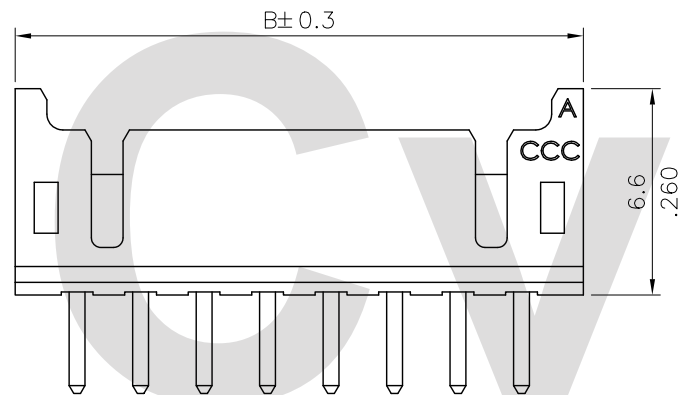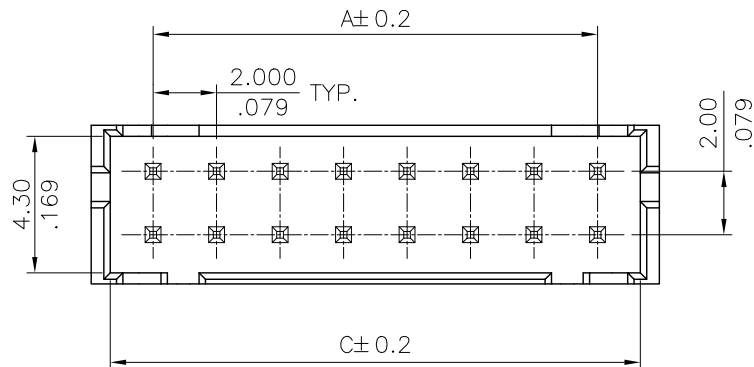

A = 2.0 x (No. of Circuits/2-1)

B = A + 3.9

C = A + 2.7

* Available in 6 through 34 circuits

Recommended P.C. Board Layout

Lead Free Process

RoHS Compliant

△ 4					DATE	UNIT: mm / inch	TITLE:	 瀚荃股份有限公司 CviLux Corporation			
△ 3	Enya	4/12-13	ECN13075-0/ECR13027-0	DRAWN BY:	Enya	4/12-13'	2.00mm PIN HEADER DIP TYPE				
△ 2	Enya	3/7-13'	ECN13056-0/ECR13007-1	ENGINEER:	Eisley	4/15-13'	MATERIAL:	DRAWING NO.	CI0167SC	PART NO.	CI01**P*VD*-LF
△ 1	Karen	5/26-10'	ECN10126	CHECKED BY:	Eisley	4/15-13'	FINISH:	SCALE	3 / 1	SHEET	1 OF 1
SYM	NAME	DATE	REVISIONS	APPROVED BY:	David	4/15-13'					