

Note:

1. Material:

△* Insulation: High Temperature Plastic UL 94V-0

* Contact: Brass

△2. For Lead Free Wave flow Process

Ordering Code:

CI01 ** P * H D 0 - LF
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No.

② No. of Circuits

③ Contact type: P= Pin Header

△④ Plating option:

1= 3.05μm (120μ") Matte Tin

over 0.76μm(30μ") Nickel

2= Gold Flash plated over




1.27μm(50μ") Nickel

⑤ Type: H=Right angle

⑥ Other Option: D= Dual Row Type

⑦ Color: 0=Nature; 1=Black; 9=Gray

△⑧ -LF= For Lead Free Wave Flow Process

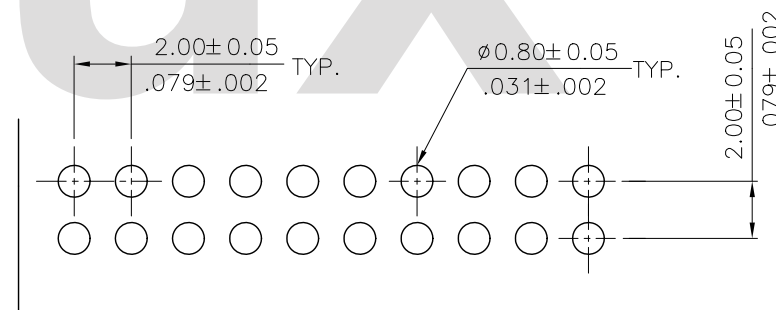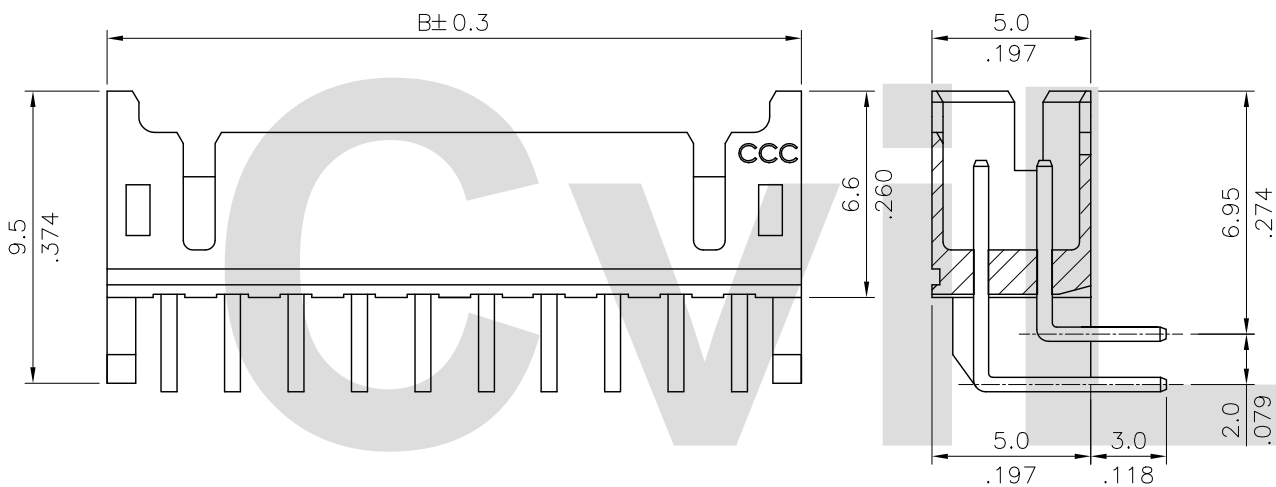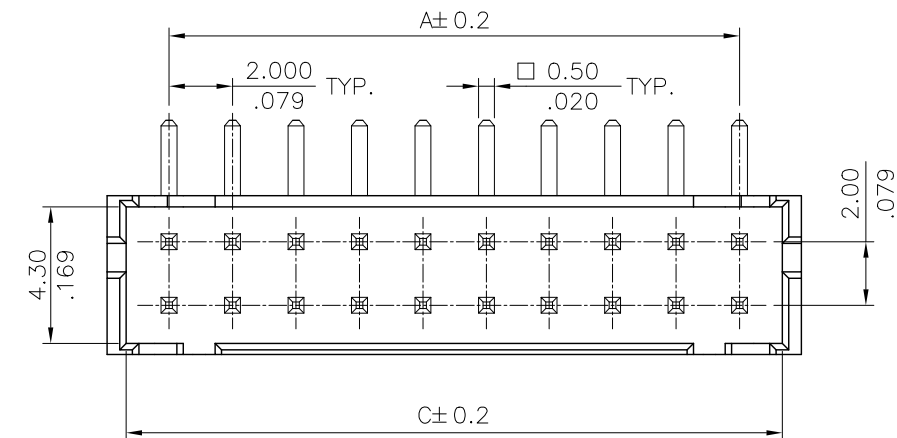

Recommended P.C. Board Layout

A = 2.0 x (No. of Circuits/2-1)


B = A + 3.9

C = A + 2.7

* Available in 6 through 34 circuits

Lead Free Process

RoHS Compliant

△4	Enya	4/12-13	ECN13075-0/ECR13027-0		DATE	UNIT: mm / inch	TITLE:	 瀚荃股份有限公司 CviLux Corporation
△3	Enya	3/7-13'	ECN13056-0/ECR13007-1	DRAWN BY:	Enya	4/12-13'	2.00mm PIN HEADER DIP TYPE	
△2	Karen	5/26-10'	ECN10126	ENGINEER:	Eisley	4/15-13'	MATERIAL:	
△1	Bill	1/29-08	ECN08056	CHECKED BY:	Eisley	4/15-13'	FINISH:	
SYM	NAME	DATE	REVISIONS	APPROVED BY:	David	4/15-13'		DRAWING NO. CI0168SC
								PART NO. CI01**P*HD*-LF
								SCALE 3 / 1
								SHEET 1 OF 1

CIVILUX CORP
 2013.05.16
 ISSUED