


Material:

- * Insulation: High Temperature Plastic UL 94V-0, Color Nature (Halogen-Free)
- * Contact: Brass
- * TAB: Brass with matte Tin plated

Ordering Code:

CI01 ** M 1 H R C -NH
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② No. of Circuits:
- ③ Contacts Type: M= SMT
- ④ Plating: 1= 3.05μm(120μ") Min. Tin over 1.27μm(50μ") Nickel(Matte Tin Finish)
- ⑤ Type: H= Right angle
- ⑥ Packing Options: R= Tape & Reel
- ⑦ Option: C= TYPE C
- ⑧ NH= For Lead Free IR Processes and Halogen-Free

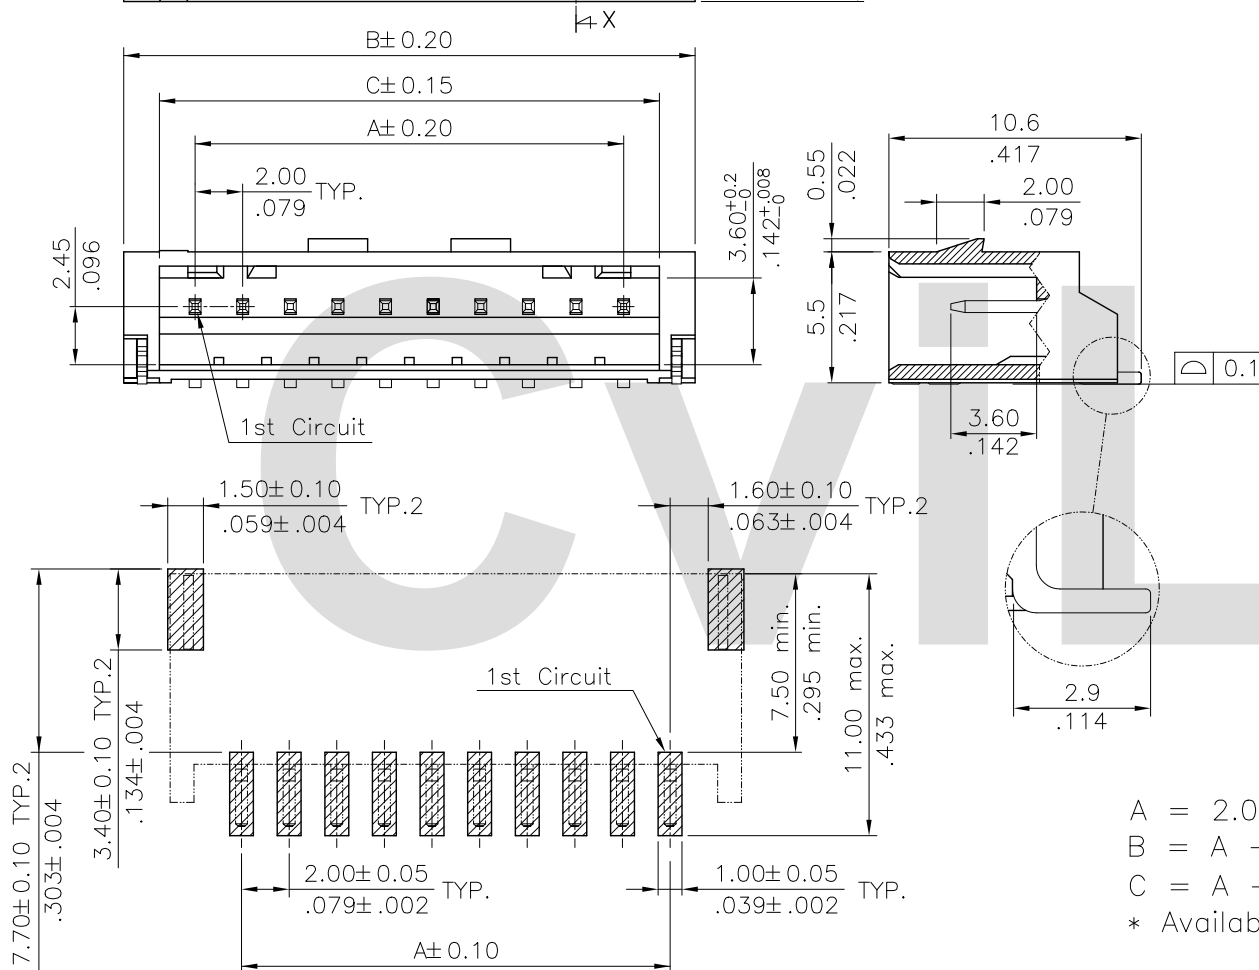

Sold Pad Pattern

A = 2.00 x No. of Spaces

B = A + 6.0

C = A + 3.0

* Available in 10,12,14 & 16 circuits

Halogen-Free

Lead Free Process


RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 2.00mm PITCH SIDE ENTRY	 瀚荃股份有限公司 CviLux Corporation			
3					DRAWN BY: Clark	2/22-13'	SMT HEADER				
2					ENGINEER: Eisley	2/26-13'	MATERIAL:				
1	Clark	02/22-13	ECN13049-0		CHECKED BY: Eisley	2/26-13'	FINISH:				
SYM	NAME	DATE	REVISIONS		APPROVED BY: David	2/26-13'		DRAWING NO.	CI0180BA	PART NO.	CI01**M1HRC-NH
								SCALE	3 / 1	SHEET	1 OF 2




NOTE :

- * Reel Material : CORRUGATED PAPER
- * Carrier Material : Transparent Anti-static Polysyrene.
- * Cover Tape Material : Polyester
- * Cover Tape Peel Strength : 0.1N — 1.3N
- * Carrier camber is within 1mm in 100mm
- * All dimensions meet EIA-481-2 requirements.
- * Quantity : 600 PCS/Reel

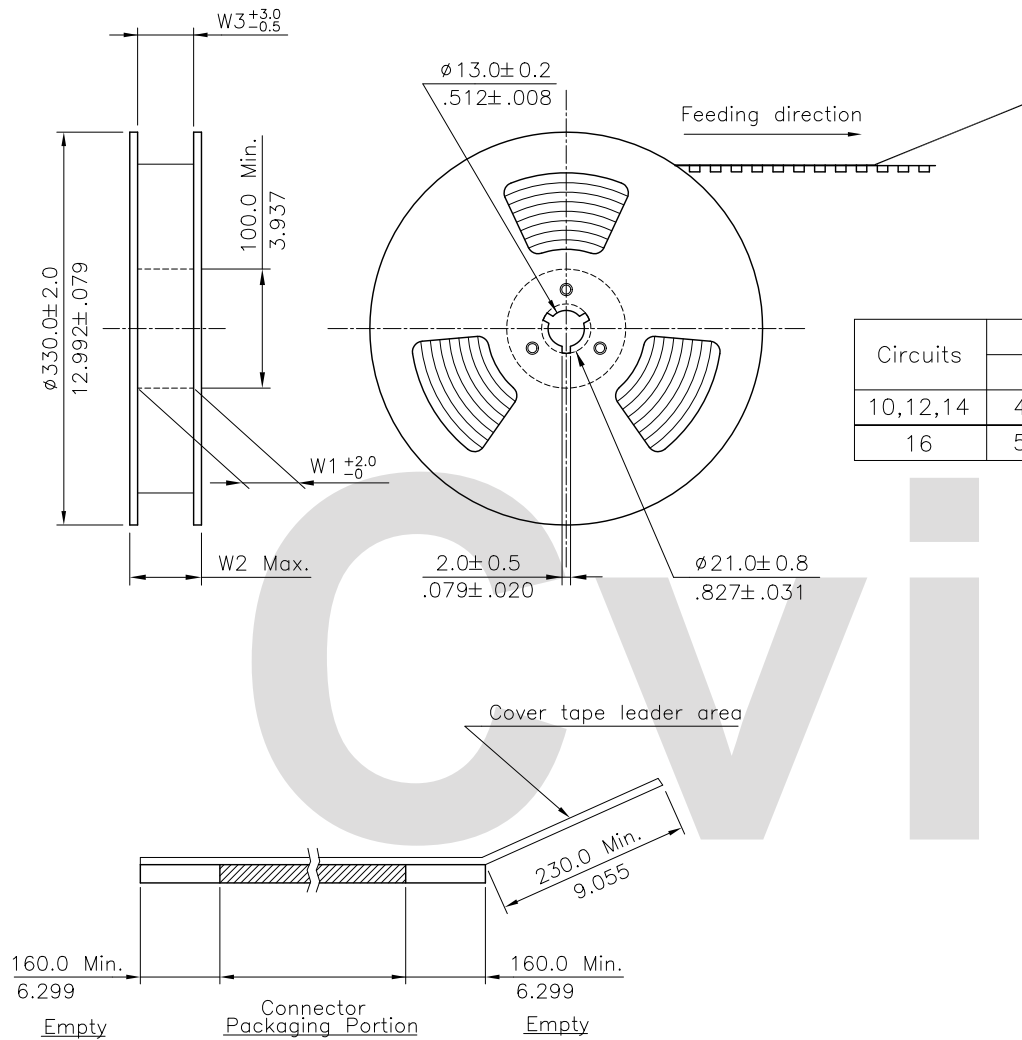

Circuits	Dimension					Packing (Reel/Caton)
	E	F	W1	W2	W3	
10,12,14	44.0(1.732)	40.40(1.596)	44.4(1.748)	50.4(1.984)	44.4(1.748)	5
16	56.0(2.205)	52.40(2.062)	56.5(2.224)	62.5(2.460)	56.5(2.224)	4

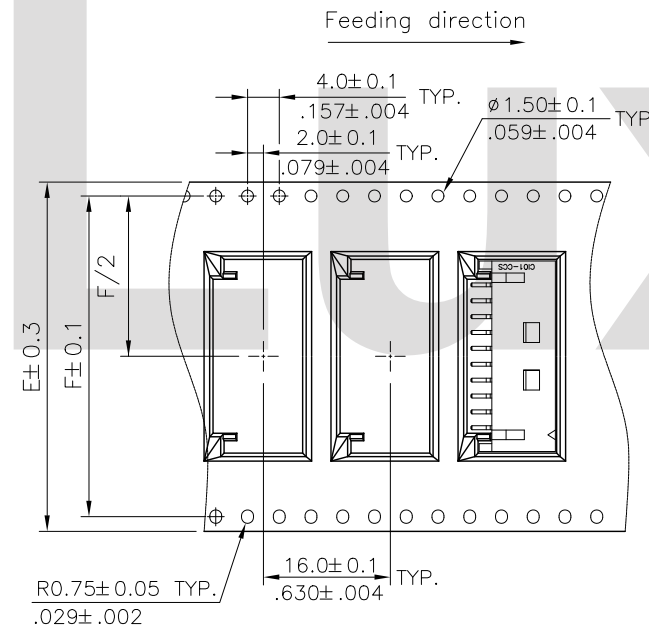

WIDTH : 44,56 mm Carrier

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 2.00mm PITCH SIDE ENTRY	 瀚荃股份有限公司 CviLux Corporation			
3					DRAWN BY: Clark	2/22-13'	SMT HEADER				
2					ENGINEER: Eisley	2/26-13'	MATERIAL:	DRAWING NO.	CIO180BA	PART NO.	CIO1**M1HRC-NH
1	Clark	02/22-13	ECN13049-0		CHECKED BY: Eisley	2/26-13'	FINISH:	SCALE		SHEET	2 OF 2
SYM	NAME	DATE	REVISIONS		APPROVED BY: David	2/26-13'					