Material:

* Insulation: Nylon 46 UL 94V-0
  Color Nature
* Contact: Brass

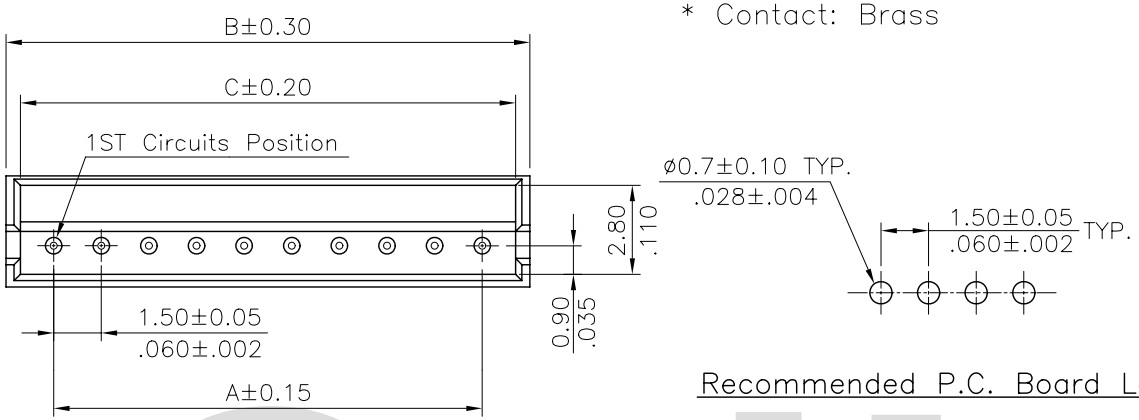

Recommended P.C. Board Layout

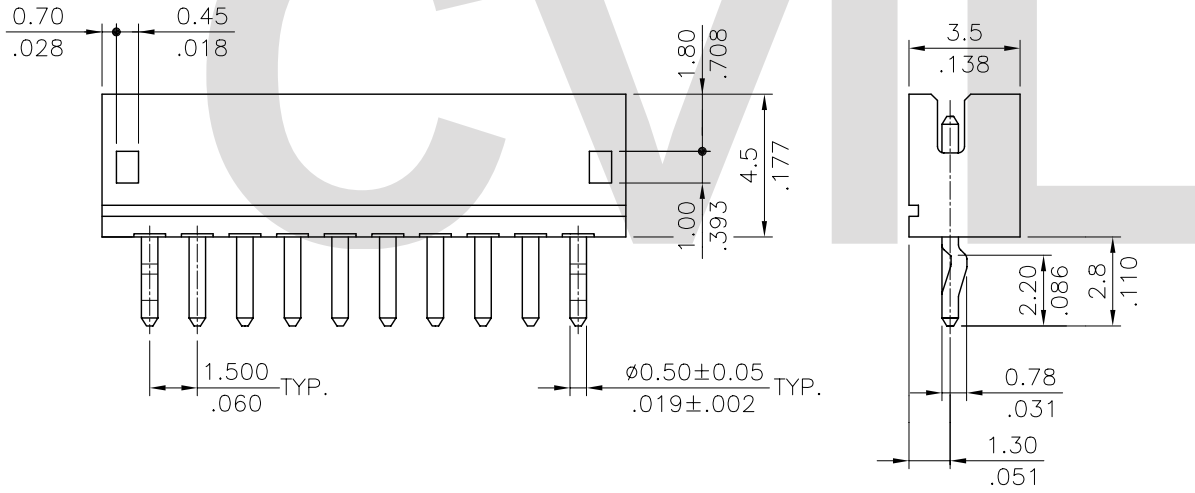

Ordering Code:

CI15 ① ** ② P ③ 1 ④ V ⑤ K0 ⑥ - LF ⑦

① Series No.
② No. of Circuits: 02 To 15
③ P= Pin header
④ Plating:
Matte Tin Plated over 1.27μm(50μ") Nickel
⑤ V= Straight Type
⑥ Other option: K0= With Pin Kinked
⑦ -LF= For Leadfree IR Processes

Circuits	Dimension		
	A	B	C
2	1.50(.059)	4.50(.177)	3.60(.142)
3	3.00(.118)	6.00(.236)	5.10(.201)
4	4.50(.177)	7.50(.295)	6.60(.260)
5	6.00(.236)	9.00(.354)	8.10(.319)
6	7.50(.295)	10.50(.413)	9.60(.378)
7	9.00(.354)	12.00(.472)	11.10(.437)
8	10.50(.413)	13.50(.531)	12.60(.496)
9	12.00(.472)	15.00(.591)	14.10(.555)
10	13.50(.531)	16.50(.650)	15.60(.614)
11	15.00(.591)	18.00(.709)	17.10(.673)
12	16.50(.650)	19.50(.768)	18.60(.732)
13	18.00(.709)	21.00(.827)	20.10(.791)
14	19.50(.767)	22.50(.885)	21.60(.850)
15	21.00(.826)	24.00(.945)	23.10(.909)

RoHS Compliant

SYM	NAME	DATE	REVISIONS
4			
3			
2			
1			

CVILUX.CORP 2006.12.22 ISSUED

		DATE
DRAWN BY:	Hank	12/22-06'
ENGINEER:	Eisley	12/22-06'
CHECKED BY:	David	12/22-06'
APPROVED BY:	Alex	12/22-06'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ± 0.30/.012	X.° ± 1°
.XX ± 0.20/.008	.X° ±
.XXX ± 0.10/.004	.XX° ±

TITLE: 1.50MM(.060") STRAIGHT HEADER

MATERIAL:

CUSTOMER:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CI1509SA	PART NO.	CI15**P1VK0-LF
SCALE	4 / 1	SHEET 1 OF 1	