

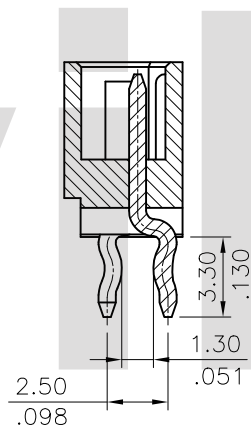



RECOMMENDED P.C.B. LAYOUT
RECOMMENDED P.C.B. THICKNESS 1.6mm
GENERAL TOLERANCE ±0.05

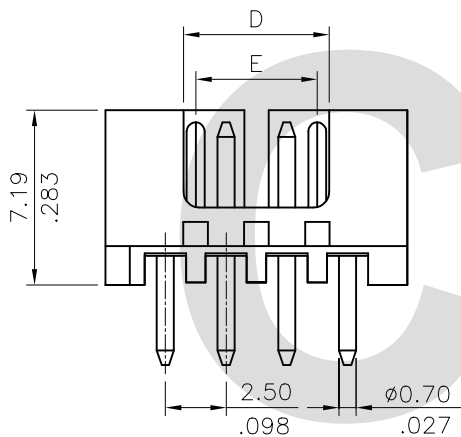

SECT F-F
WITH KINK SHOW

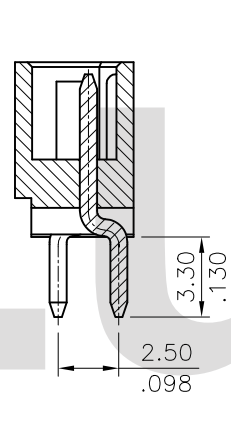

SECT F-F
WITHOUT KINK SHOW

Material:

* Insulation: LCP, UL 94V-0, Color Ivory

* Contact: Brass, round pins

Ordering Code:

CI25 ** P * V *0 -NH
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② No. of Circuits
- ③ Contact type: P= Pin header
- ④ Plating option:

1= 3.05µm(120µ") Min. Matte Tin
 Plating on Contact area and
 Solderails, 0.76µm(30µ") Nickel
 Underplating over all

4= 0.76µm(30µ") Gold plated
 Plating on Contact area and
 Solderails, 1.27µm(50µ") Nickel
 Underplating over all

- ⑤ Tail Style: V= Straight
- ⑥ Option: K0= With Kinked
 A0= Without Kinked
- ⑦ Other option:

-NH= For Lead Free wave flow
 Processes and Halogen-Free

PIN	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E
03	5.00(.197)	9.92(.391)	8.52(.335)	3.50(.138)	2.50(.098)
04	7.50(.295)	12.42(.489)	11.02(.434)	6.00(.236)	5.00(.197)
05	10.00(.394)	14.92(.587)	13.52(.532)	6.00(.236)	7.50(.295)

Halogen-Free

Lead Free Process

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 2.50MM(.098") STRAIGHT HEADERS
3					DRAWN BY: Sandy	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:
2					ENGINEER: Sun		
1					CHECKED BY: Eisley	.XX ± 0.20/.010 X: ±	FINISH:
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	4/15-15'	.XXX ± 0.10/0.04 XX: ±	

CVILUX CORP
2015.04.16
ISSUED



瀚荃股份有限公司
 CviLux Corporation

DRAWING NO.	CI2563SA	PART NO.	CI25**P*V*0-NH
SCALE	3 / 1	SHEET	1 OF 1