


Material: Nylon66 UL 94V-0, Color Nature

### Ordering Code:


$\frac{CI26}{①}$   $\frac{**}{②}$   $\frac{S}{③}$   $\frac{0000}{④}$

- ① Series No.
- ② No. of Circuits:
- ③ Contact type: S= Connector housing
- △ ④ Other options: 0000= Standard

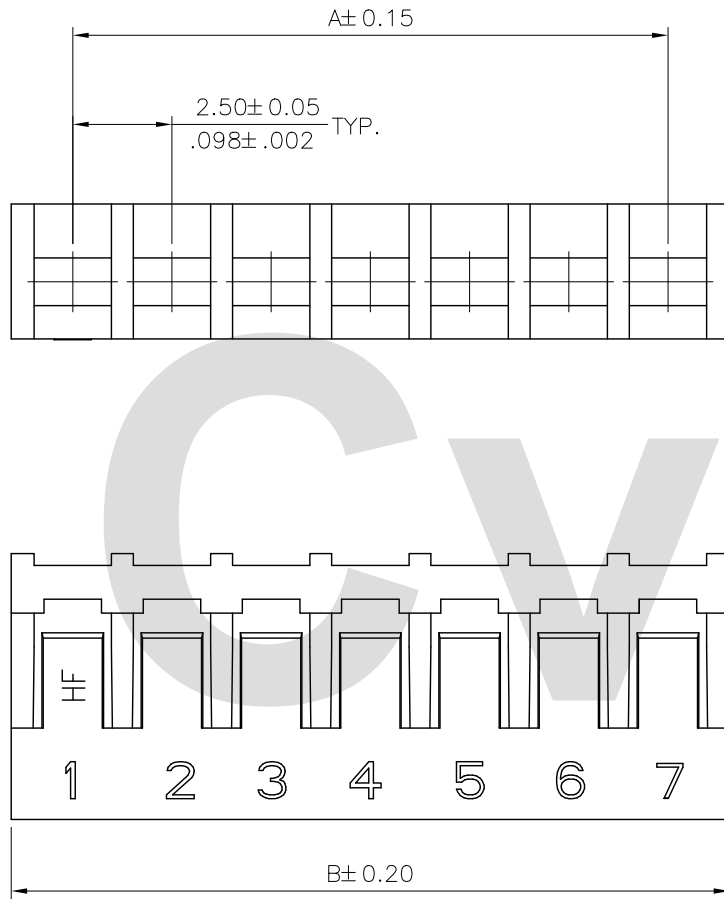

Circuits	Dimension	
	A	B
2	2.50(.098)	5.6(.220)
3	5.00(.197)	8.1(.389)
4	7.50(.295)	10.6(.417)
5	10.00(.394)	13.1(.516)
6	12.50(.492)	15.6(.614)
7	15.00(.591)	18.1(.713)
8	17.50(.689)	20.6(.811)
9	20.00(.787)	23.1(.909)
10	22.50(.886)	25.6(1.008)
11	25.00(.984)	28.1(1.106)
12	27.50(1.083)	30.6(1.205)
13	30.00(1.181)	33.1(1.303)
14	32.50(1.280)	35.6(1.402)
15	35.00(1.378)	38.1(1.500)
16	37.50(1.476)	40.6(1.598)

Halogen-Free  
RoHS Compliant

④					DATE	UNIT: mm / inch	TITLE: 2.50MM(.098") CRIMP TERMINAL HOUSING	 瀚荃股份有限公司 CviLux Corporation
③					DRAWN BY: Karen 5/11-12'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
②					ENGINEER: Eisley 5/16-12'	.X ± 0.25 / .010 X' ± 1"	FINISH:	DRAWING NO. CI2607SB PART NO. CI26**S0000
①	Karen	5/11-12'	ECR12033-0		CHECKED BY: Eisley 5/16-12'	.XX ± 0.15 / .006 X' ±		SCALE 5 / 1
SYM	NAME	DATE	REVISIONS		APPROVED BY: David 5/16-12'	.XXX ± 0.08 / .003 .XX' ±		

  
 2012.05.28  
 ISSUED