

Ordering Code

$\frac{13W3}{①}$ $\frac{S}{②}$ $\frac{P}{③}$ $\frac{H}{④}$ $\frac{3}{⑤}$ $\frac{2}{⑥}$ $\frac{1}{⑦}$ $\frac{40}{⑧}$ $\frac{I10}{⑨}$

- ① Series No.
- ② Connector Type: S= Receptacle
- ③ Contact type: P= High Power Contact
- ④ Contact tail style: H= Right Angle Dip type
- ⑤ High power contact plating:

- 2= Gold flash plated over Nickel
- 3= 15 μ " Gold plated over Nickel
- 4= 30 μ " Gold plated over Nickel
- 5= 50 μ " Gold plated over Nickel

- ⑥ Singal contact plating:


- 2= Gold flash plated over Nickel
- 3= 15 μ " Gold plated over Nickel
- 4= 30 μ " Gold plated over Nickel

- ⑦ Insulator color: 1= Black, 6= Green

- ⑧ Performance: 40= 40A

- ⑨ Mounting Style:

- 000= With $\phi 3.05$ mm holes on shell
- B00= Riveted #4-40 UNC open nuts on front shell
- C00= Riveted #4-40 UNC open nuts on rear shell
- I00= Riveted #4-40 UNC ground tabs with $\phi 3.2$ mm holes
- I10= Riveted #4-40 UNC ground tabs with board locks(standard)

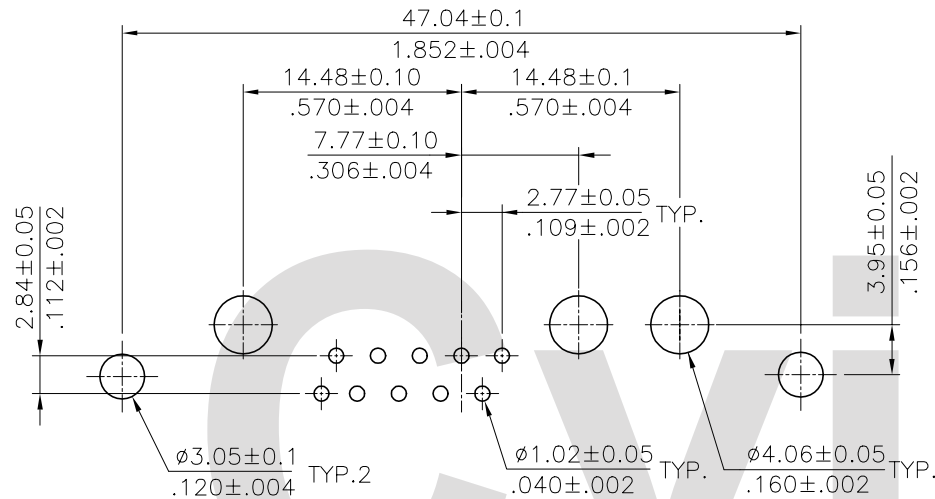

Mounting Style

RoHS Compliant

Code	000	Code	B00	Code	C00	Code	I00	Code	I10
			DIM. L= 4.0mm		DIM. L= 4.0mm		$\phi A=3.2$ mm		

④					DATE	UNIT: mm / inch	TITLE: 13W3 40A HIGH POWER FEMALE D-SUB CONNECTOR (RIGHT ANGLE TYPE)	瀚荃股份有限公司 CviLux Corporation				
③					DATE	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:					
②	Jim	10/13/06'	ECR06094-0/ECN06369	2006.10.24 ISSUED	DRAWN BY: Jim	10/14/ 06'	.X ± 0.30/012	.X' ± 1'	DRAWING NO.	13W314SD	PART NO.	13W3SPH***40***
①	SUN	3/24/05'	ECR05025-0/ECN05095		ENGINEER: Easley	10/14/ 06'	.XX ± 0.20/008	.X' ±	SCALE	2 / 1	SHEET	2 OF 2
SYM	NAME	DATE	REVISIONS		CHECKED BY: David	10/17/ 06'	.XXX ± 0.10/004	.XX' ±				
					APPROVED BY: Alex	10/17/ 06'						