

# Ordering Code

17W2 P C V 3 2 1 75 D00  
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Connector Type: P= Plug
- ③ Contact type: C= Coaxial Contact
- ④ Contact tail style: V= Straight Dip type
- ⑤ Coaxial contact plating:

2= Gold flash plated over Nickel  
 3= 15μ" Gold plated over Nickel  
 4= 30μ" Gold plated over Nickel  
 5= 50μ" Gold plated over Nickel

- ⑥ Signal contact plating:

2= Gold flash plated over Nickel  
 3= 15μ" Gold plated over Nickel  
 4= 30μ" Gold plated over Nickel

- ⑦ Insulator color: 1= Black, 6= Green

- ⑧ Performance: 50= 50Ω, 75= 75Ω

- ⑨ Mounting Style:

000= With ø3.05mm holes on shell  
 B00= Riveted #4-40 UNC open nuts on front shell  
 C00= Riveted #4-40 UNC open nuts on rear shell

D00= Riveted #4-40 UNC ground stand-off on rear shell(standard)

## Material:

Insulator: Glass filled Polyester UL 94V-0

Contact: Copper alloy


Shell: Steel, Tin plated as standard

## Coaxial terminal


Insulator: Teflon UL 94V-0, Color white

Contact: Brass

#4-40 UNC TYP.2

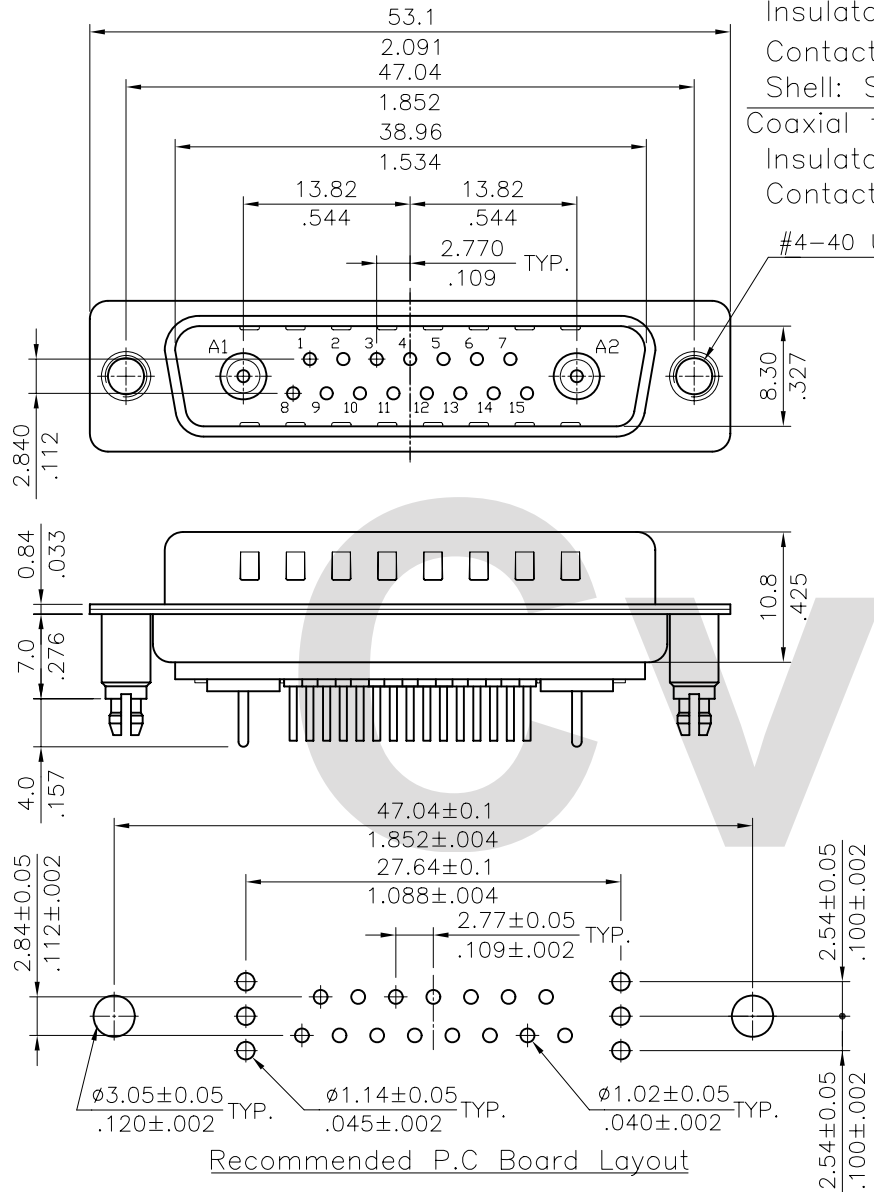

Recommended P.C Board Layout

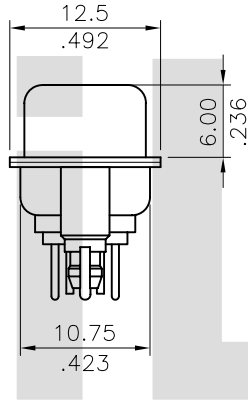

Mounting Style				RoHS Compliant			
Code	000	Code	B00	Code	C00	Code	D00
DIM. L= 4.0mm		DIM. L= 4.0mm		DIM. L= 4.0mm		DIM. L= 7.0mm	

△4				DATE	UNIT: mm / inch	TITLE: 17W2 COAXIAL MALE D-SUB CONNECTOR (TOP ENTRY BOARD MOUNT TYPE)	瀚荃股份有限公司 CviLux Corporation	
△3				DRAWN BY: Rita	10/18-01'			TOLERANCE UNLESS OTHERWISE SPECIFIED
△2				ENGINEER: David	10/19-01'			
△1				CHECKED BY: David	10/19-01'			.XXX ± 0.10/.004 .XX' ± .005'
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	10/19-01'			
						SCALE	2 / 1 SHEET 1 OF 1	

