


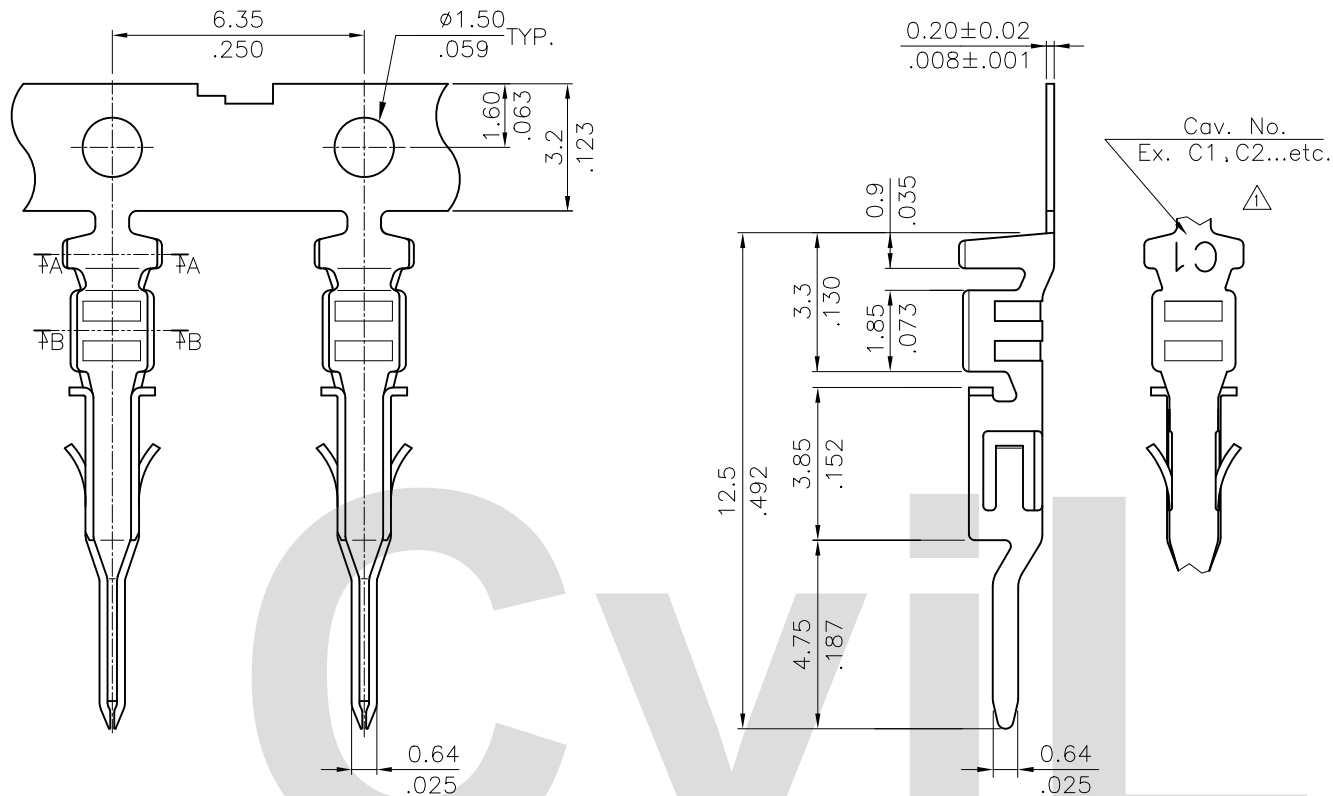


Ordering Code:


CP35 TN* 1 P E P - HC
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Accept wire gage:
TN1= AWG #26 ~ #30
TN2= AWG #20 ~ #24
- ③ Plating code:
1= Tin plated over Nickel
- ④ Material : P= Phosphor Bronze
- ⑤ Plating method: E= Pre-tinned
- ⑥ Style: P= Plug terminal
- ⑦ Other option: -HC= High current type

P/N	DIM.A	DIM.B	DIM.C	DIM.D
CP35TN11PEP-HC	2.1 (.083)	1.9 (.075)	1.7 (.067)	1.5 (.059)
CP35TN21PEP-HC	2.5 (.098)	2.4 (.094)	2.1 (.083)	2.0 (.079)



SEC: A-A



SEC: B-B

P/N	Wire Gauge	Insulation Diameter	Finish	Reel Q'TY
CP35TN11PEP-HC	AWG#26~#30	1.35 (.053) MAX.	2.03 μ m (80 μ inch) Min. Tin plated over	12,000 PCS
CP35TN21PEP-HC	AWG#20~#24	2.50 (.098) MAX.	0.76 μ m (30 μ inch) Nickel	

RoHS Compliant

4				CVILUX CORP 2013.11.25 ISSUED		DATE	UNIT: mm / inch		TITLE: CP35 MALE CRIMP TERMINAL	 瀚荃股份有限公司 CviLux Corporation				
3					DRAWN BY:	Enya	11/7-13'	TOLERANCE UNLESS OTHERWISE SPECIFIED						
2					ENGINEER:	Sun	11/7-13'	.X ±0.20/.008	X* ± 1"		MATERIAL:			
1	Enya	11/07-13'	ECNT113108/ECNT113091/ECRT113022		CHECKED BY:	Eisley	11/7-13'	.XX ±0.10/.004	.X* ±					
SYM	NAME	DATE	REVISIONS		APPROVED BY:	Eisley	11/7-13'	.XXX ±0.05/.002	.XX* ±	FINISH:	DRAWING NO.	CP35108SB	PART NO.	CP35TN*1PEP-HC
											SCALE	5 / 1	SHEET	1 OF 1