

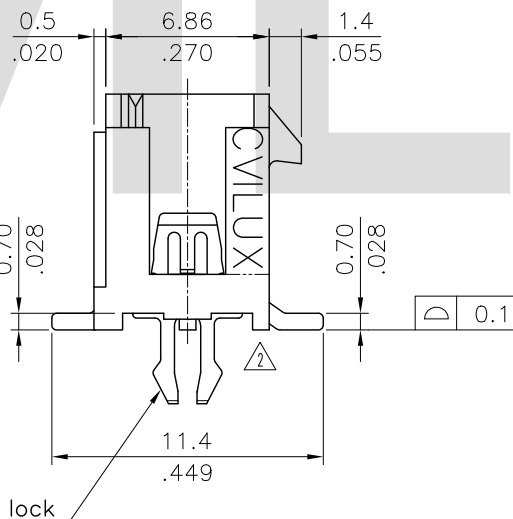
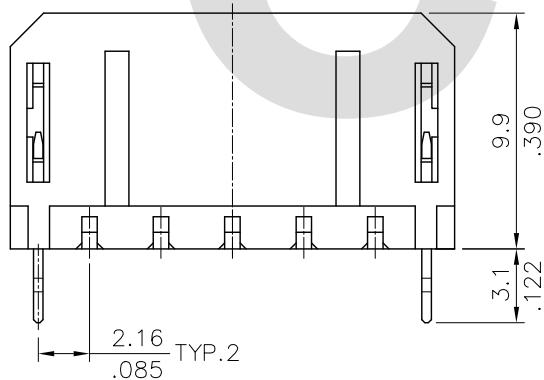


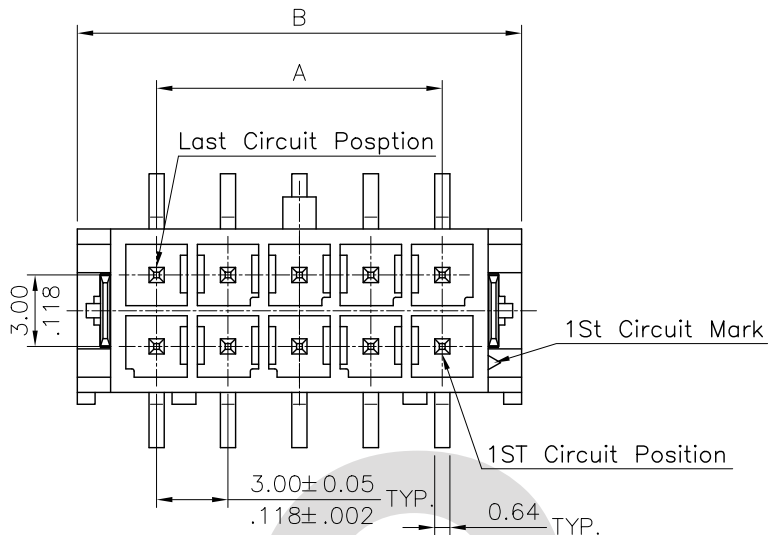

Ordering Code:

CP35 ** P * V S 0 - LF
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② No. of Circuits: 02~24
- ③ Contact type: P= Plug
- ④ Contact plated:
1= Tin Plated over Nickel
A= Selective Gold Flash Plated over 1.27 μm(50 μ") Nickel
B= Selective 0.38 μm(15 μ") Gold Plated over 1.27 μm(50 μ") Nickel
C= Selective 0.76 μm(30 μ") Gold Plated over 1.27 μm(50 μ") Nickel
- ⑤ V= Straight
- ⑥ Mount type : S= SMT Type
- ⑦ Other options: 0= With metal board lock (Standard)
- ⑧ LF= For Lead Free IR Process

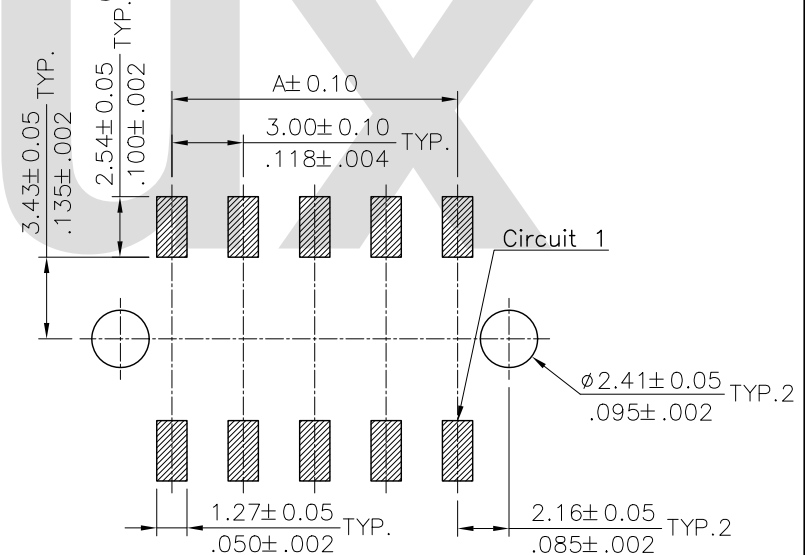

Recommended P.C. Board Layout

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 3.00mm PITCH STRAIGHT SMT TYPE POWER CONN.	 瀚荃股份有限公司 CviLux Corporation			
3					DRAWN BY: Sandy	2/3-12'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
2	Sandy	2/3-12'	ECN12010		ENGINEER: Eisley	2/4-12'	.X ± 0.30/.012 X' ± 1'	DRAWING NO. CP3543SC PART NO. CP35**P*VS0-LF			
1	Sun	12/12-05	ECN05428		CHECKED BY: Eisley	2/4-12'	.XX ± 0.20/.008 X' ±				
SYM	NAME	DATE	REVISIONS		APPROVED BY: David	2/4-12'	.XXX ± 0.10/.004 X' ±	SCALE 3 / 1 SHEET 1 OF 1			

CVILUX CORP
2012.02.10
ISSUED