
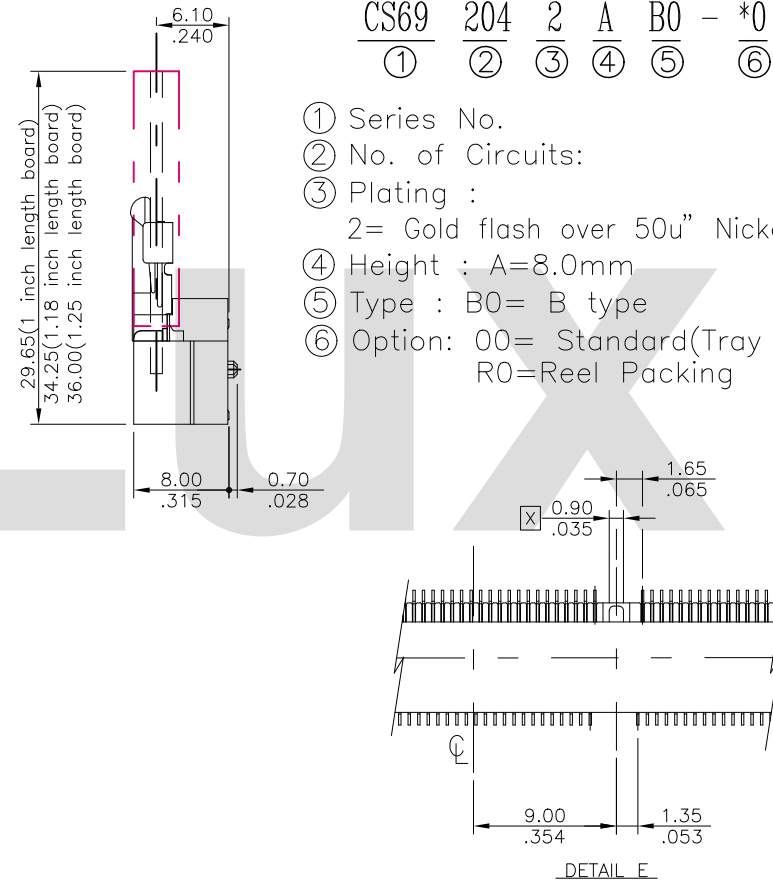




- * Insulation: LCP UL 94V-0
- * Contact: Copper alloy
- * Latch: Steel (SUS)

$$\frac{\text{CS69}}{\textcircled{1}} \quad \frac{204}{\textcircled{2}} \quad \frac{2}{\textcircled{3}} \quad \frac{\text{A}}{\textcircled{4}} \quad \frac{\text{B0}}{\textcircled{5}} - \frac{*0}{\textcircled{6}}$$

- ① Series No.
- ② No. of Circuits:
- ③ Plating :
2= Gold flash over 50u" Nickel
- ④ Height : A=8.0mm
- ⑤ Type : B0= B type
- ⑥ Option: 00= Standard(Tray Packing)
R0=Reel Packing

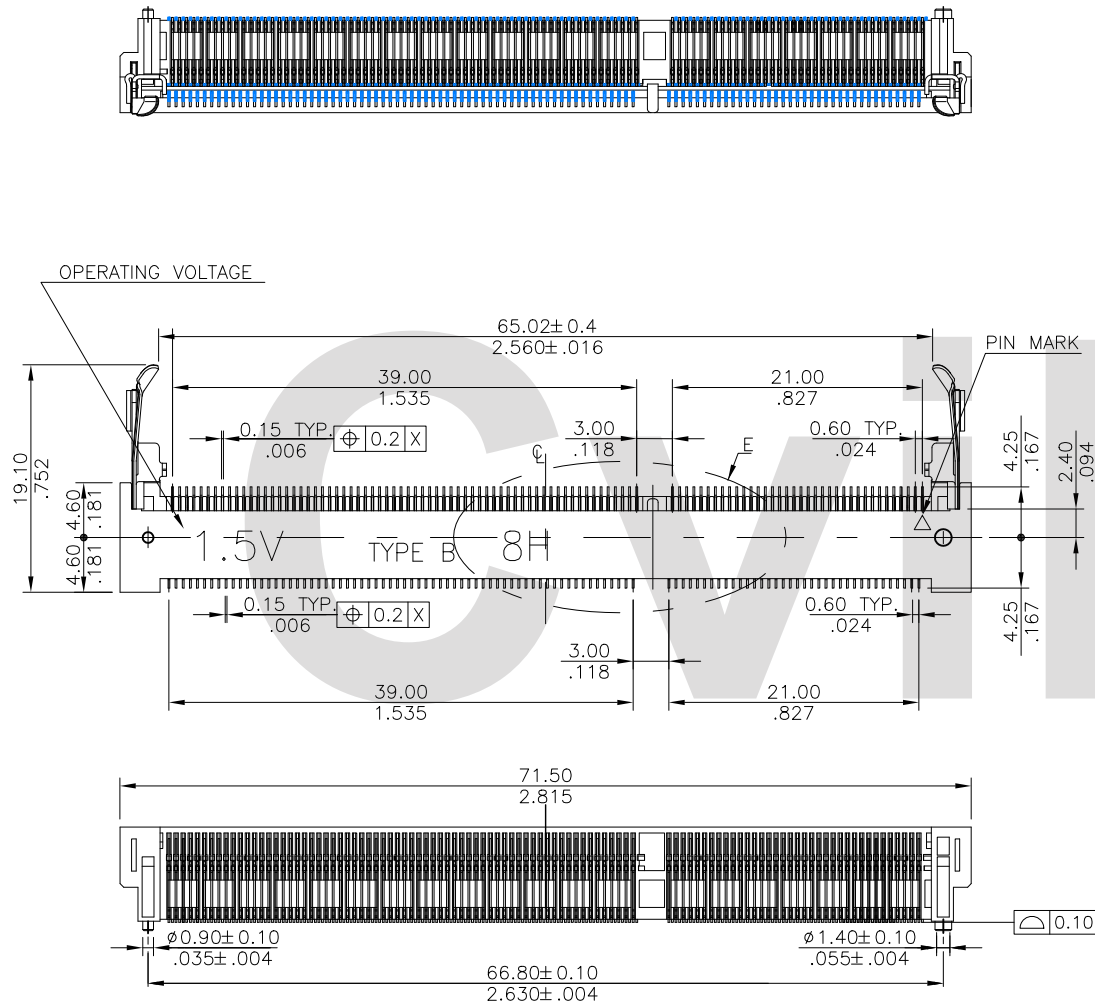


4			CVILUX CORP 2012.12.07 ISSUED			DATE	UNIT: mm / inch		TITLE: DDR S.O DIMM SOCKET.(DDR3)	 瀚荃股份有限公司 CviLux Corporation
3				DRAWN BY:	Enya	11/06-12'	TOLERANCE UNLESS OTHERWISE SPECIFIED			
2				ENGINEER:	Eisley	11/07-12'	.X ± - / -	X* ± 3'	FINISH:	
1				CHECKED BY:	Eisley	11/07-12'	.XX ± 0.20 / .009	.X* ±		
SYM	NAME	DATE	REVISIONS	APPROVED BY:	David	11/07-12'	.XXX ± - / -	.XX* ±		DRAWING NO. CS6905SA PART NO. CS692042AB0-001 SCALE 1 / 1 SHEET 1 OF 6

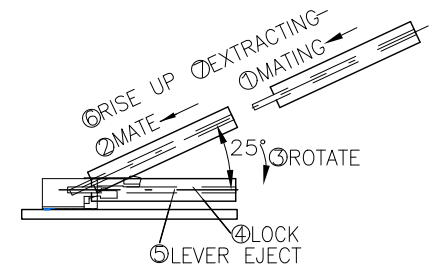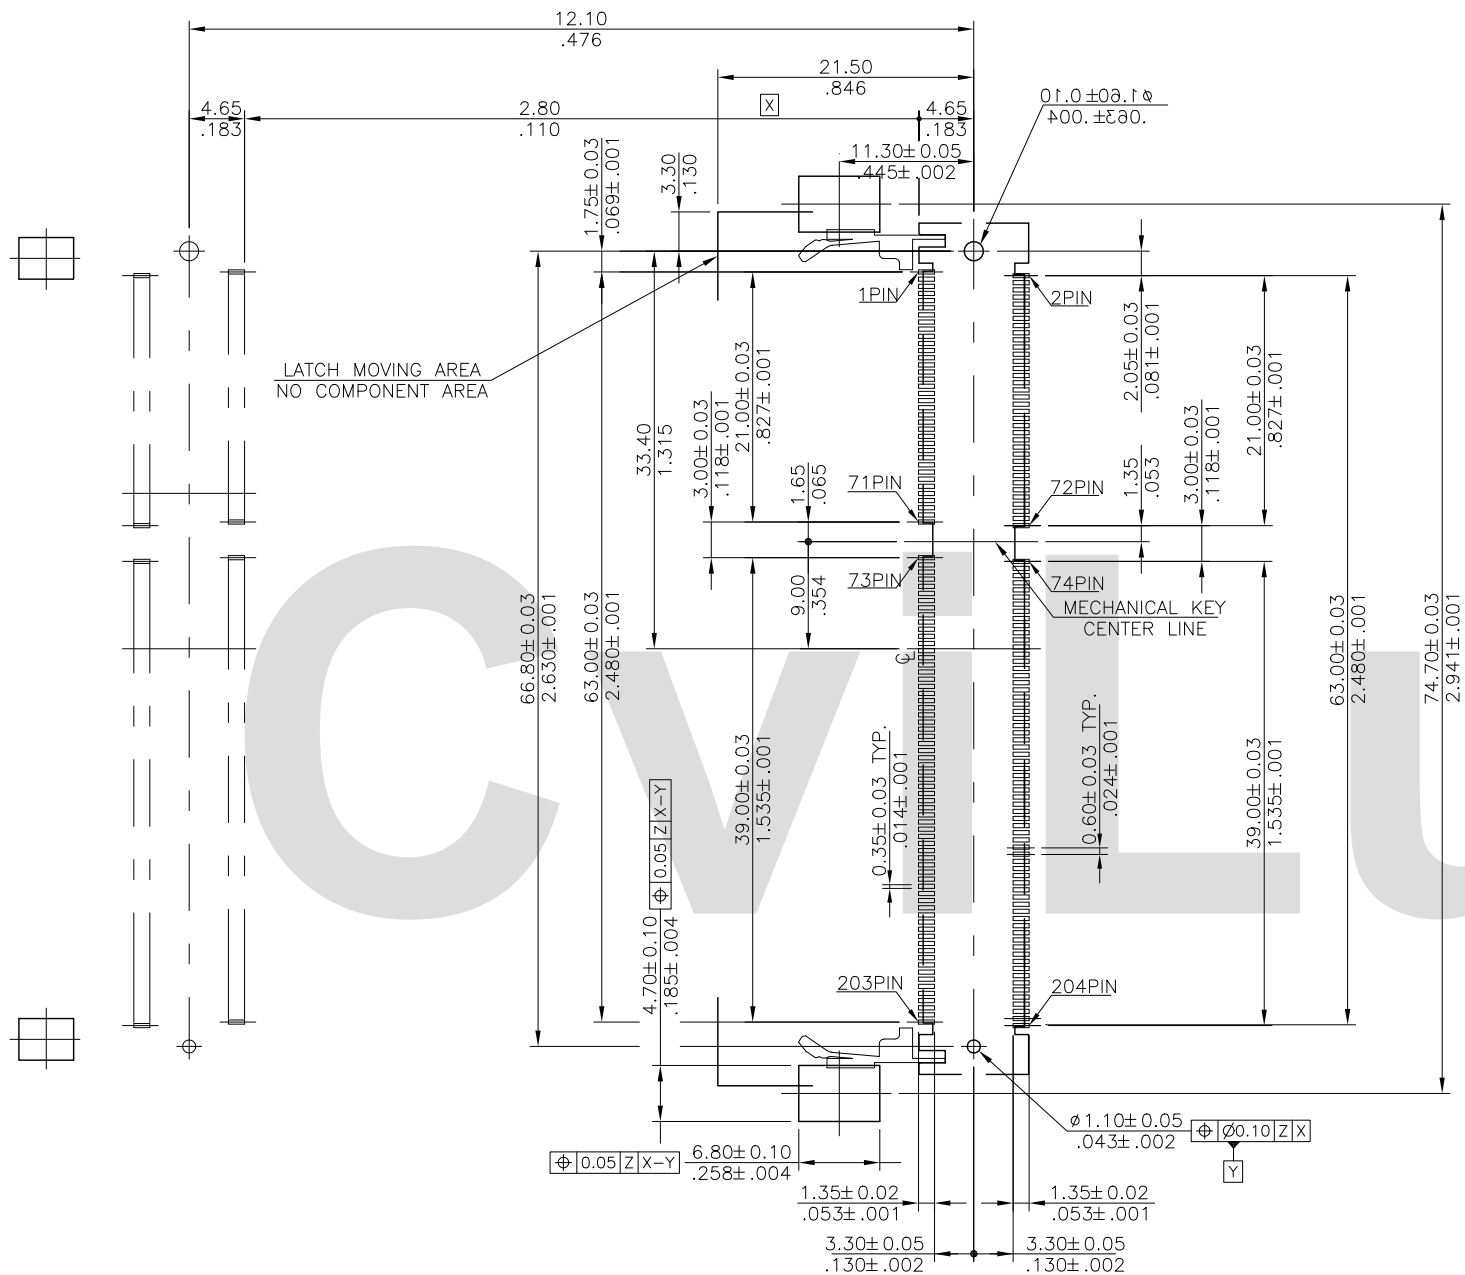

HOW TO MATE AND UNMATE


MATE ① - ④
UNMATE ⑤ - ⑦

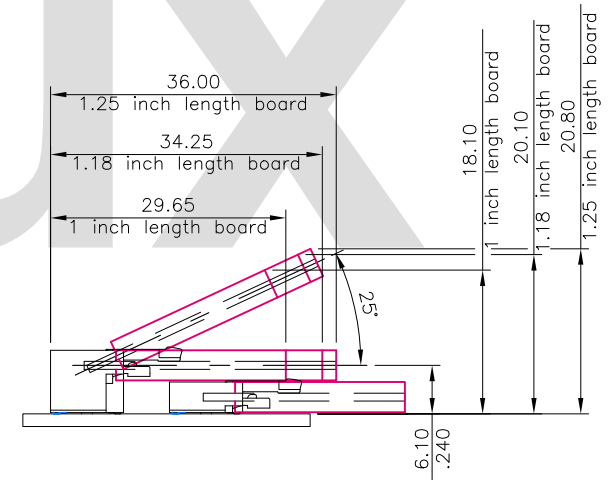



EJECT HEIGHT

4					DATE	UNIT: mm / inch	TITLE:	 瀚荃股份有限公司 CviLux Corporation			
3					11/06-12'	TOLERANCE UNLESS OTHERWISE SPECIFIED	DDR S.O DIMM SOCKET.(DDR3)				
2					ENGINEER: Enya	11/07-12'	MATERIAL:	DRAWING NO. CS6905SA	PART NO. CS692042AB0-#0	SHEET 2 OF 6	
1					CHECKED BY: Eisley	11/07-12'	FINISH:				
SYM	NAME	DATE	REVISIONS	APPROVED BY: David	11/07-12'	.xxx ± - / - .xx ±		SCALE	1 / 1		



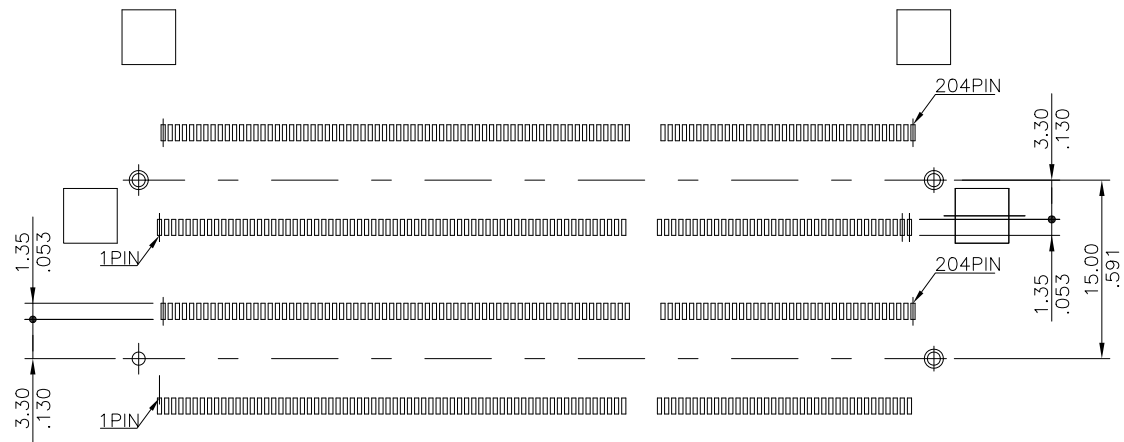

RECOMMENDED MOUNTING
P.C. BOARD PATTERN LAYOUT DIM.

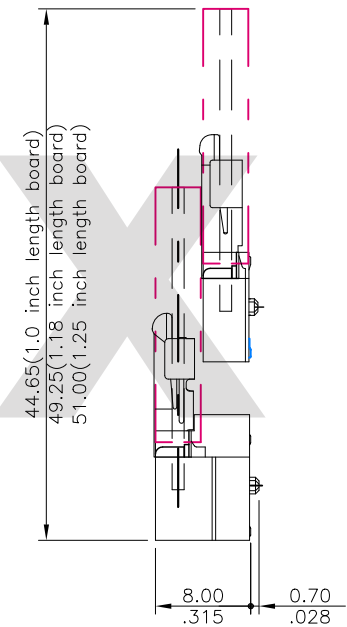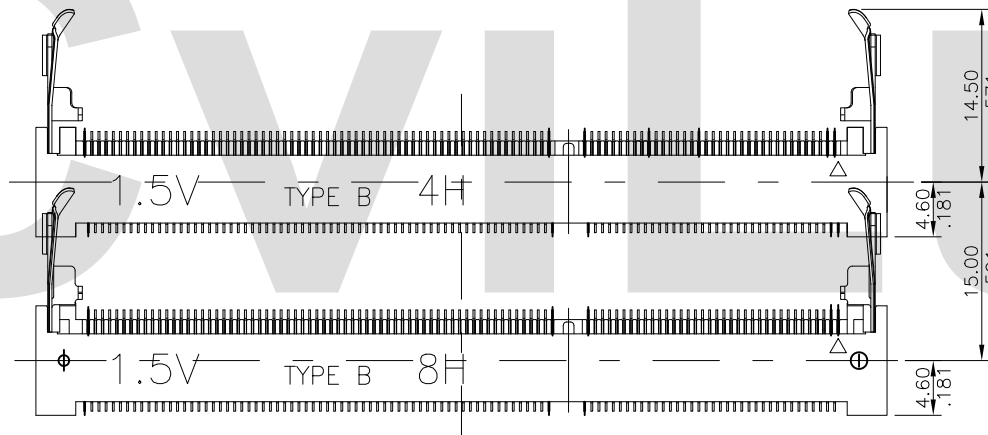

Combination Dimension for H=4.0 connector

(Only the combination of the P/N: CS692042BB0(H=4.0) and CS692042AB0(H=8.0) is possible.)

4						DATE	UNIT: mm / inch	TITLE:	 瀚荃股份有限公司 CviLux Corporation			
3								DDR S.O DIMM SOCKET.(DDR3)				
2								MATERIAL:	DRAWING NO. CS6905SA PART NO. CS692042AB0-*0			
1								FINISH:				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	David	11/07-12'	.xxx ± - / - .xx* ±		SCALE	1 / 1	SHEET	4 OF 6




DRAWN BY: Enya
ENGINEER: Eisley
CHECKED BY: Eisley
APPROVED BY: David

11/06-12'
11/07-12'
11/07-12'
11/07-12'

TOLERANCE
UNLESS OTHERWISE SPECIFIED
.X ± - / - .X* ± 3'
.XX ± 0.20 / .009 .X ±
.xxx ± - / - .xx* ±

TITLE:
DDR S.O DIMM SOCKET.(DDR3)
MATERIAL:
FINISH:

DRAWING NO. CS6905SA PART NO. CS692042AB0-*0
SCALE 1 / 1 SHEET 4 OF 6

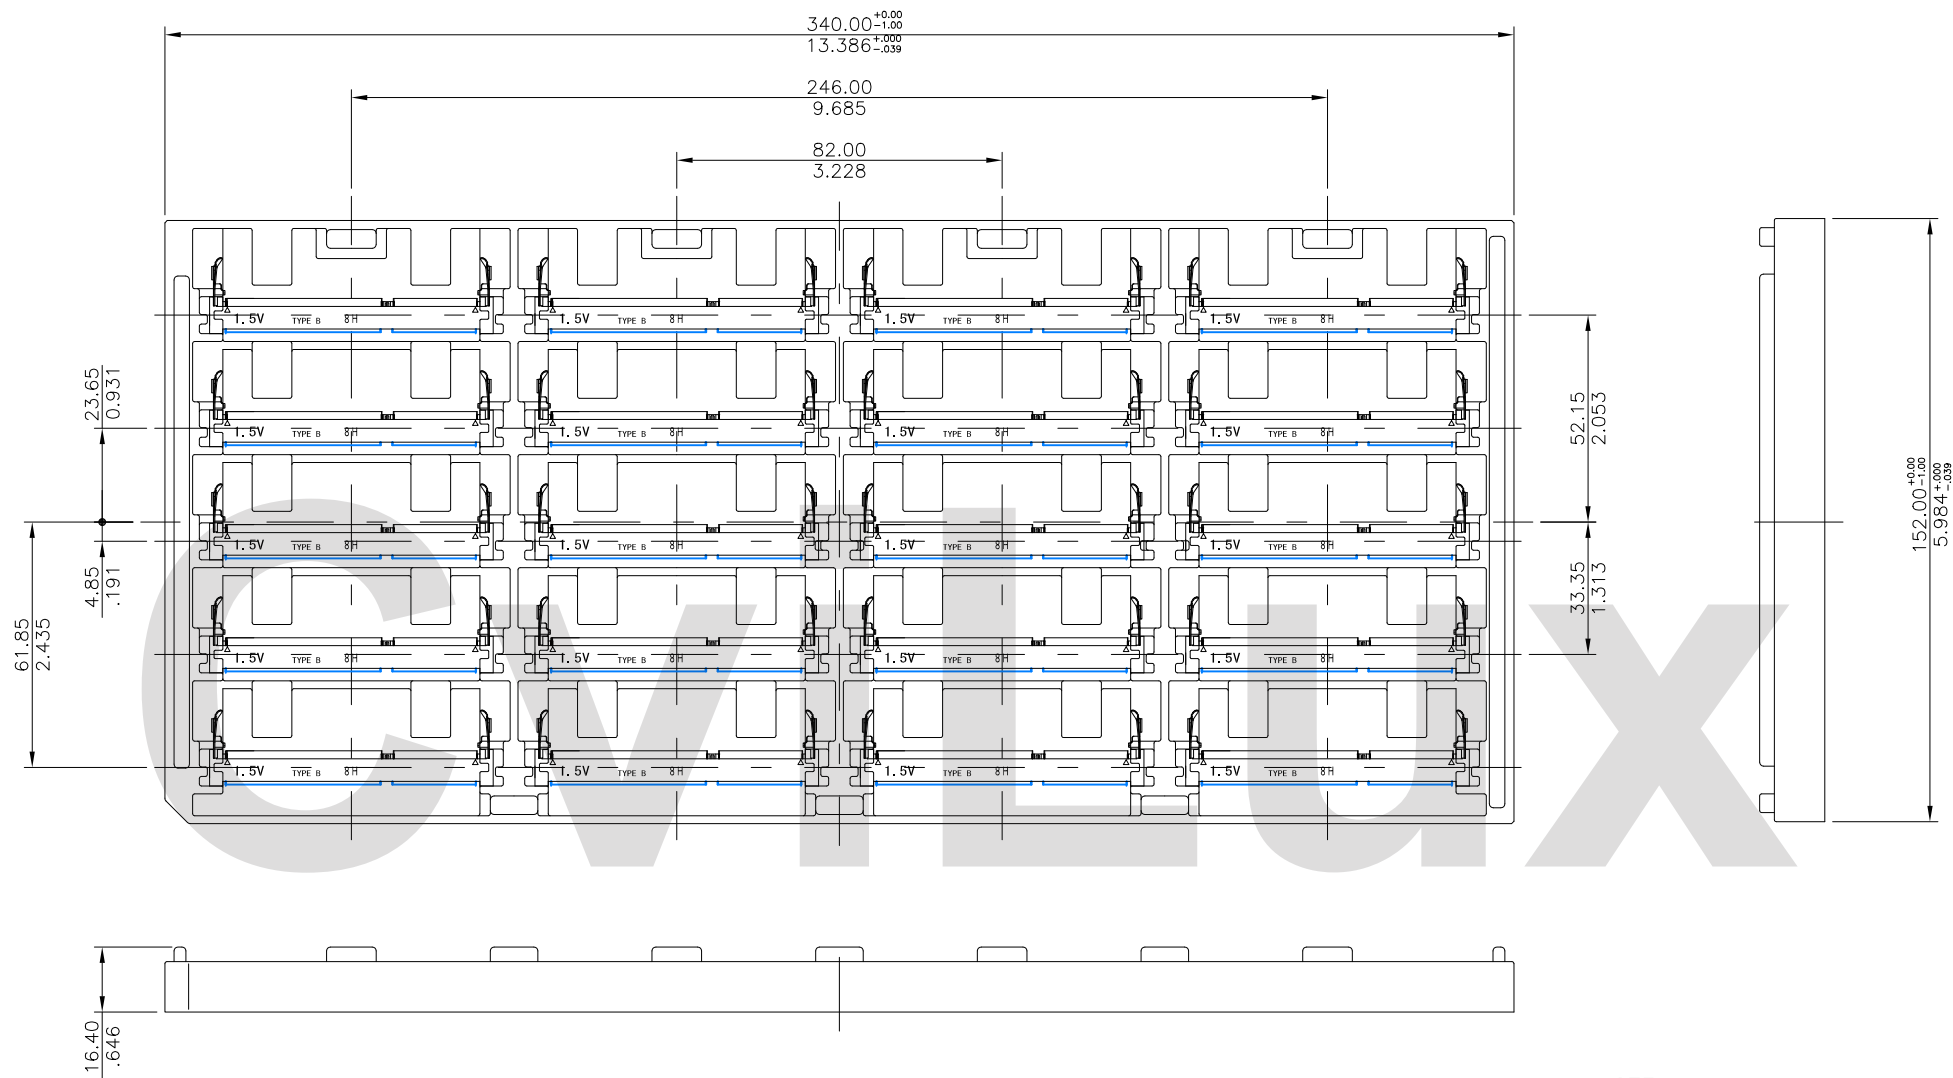


HARD TRAY PACKAGING

NOTE :


Quantity : 20 PCS/TRAY

4				CVILUX CORP 2012.12.07 ISSUED			DATE	UNIT: mm / inch		TITLE: DDR S.O DIMM SOCKET.(DDR3)	 瀚荃股份有限公司 CviLux Corporation			
3					DRAWN BY:	Enya	11/06-12'	TOLERANCE UNLESS OTHERWISE SPECIFIED						
2					ENGINEER:	Eisley	11/07-12'	.X ± /	X' ± 3'	MATERIAL:				
1					CHECKED BY:	Eisley	11/07-12'	.XX ± 0.50 / .020	X' ±					
SYM	NAME	DATE	REVISIONS		APPROVED BY:	David	11/07-12'	.xxx ± /	.xx' ±	FINISH:				
											DRAWING NO.	CS6905SA	PART NO.	CS692042AB0--*0
											SCALE	1 / 1	SHEET	5 OF 6

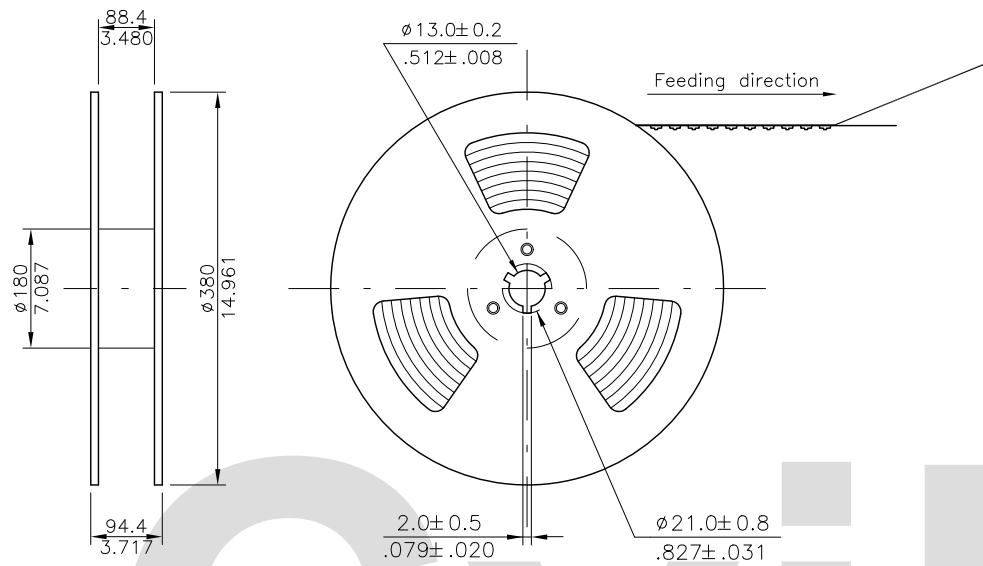


NOTES:

- * Cover Tape Peeling Angle : 165° to 180°
- * Exfoliation Speed : 300mm/minute
- * Cover Tape Peel Strength : 10.0~150.0gf
- * Quantity : 250 PCS/Reel

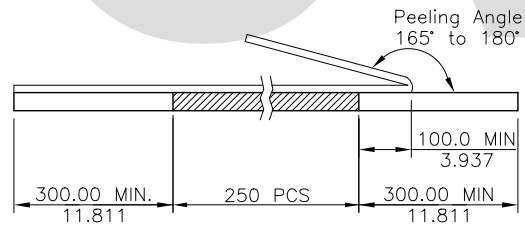

Empty Packaging Portion Empty

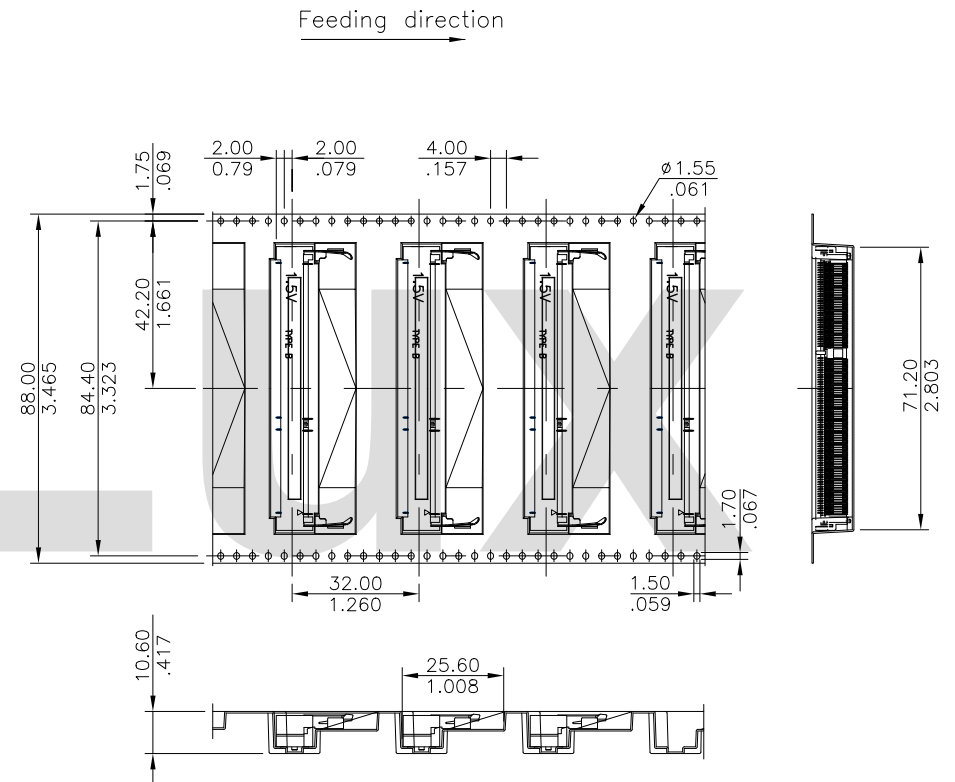

4			CVILUX CORP 2012.12.07 ISSUED			DATE	UNIT: mm / inch		TITLE: DDR S.O DIMM SOCKET.(DDR3)	 瀚荃股份有限公司 CviLux Corporation				
3				DRAWN BY:	Enya	11/06-12'	TOLERANCE UNLESS OTHERWISE SPECIFIED							
2				ENGINEER:	Eisley	11/07-12'	.X ± /	X* ±	MATERIAL:					
1				CHECKED BY:	Eisley	11/07-12'	.XX ± /	.X* ±		FINISH:				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	David	11/07-12'	.XXX ± /	.XX* ±			DRAWING NO.	CS6905SA	PART NO.	CS692042AB0-#0
										SCALE	1 / 1		SHEET	6 OF 6

