

Notes:


Insulator: Glass filled Polyester UL 94V-0

Contact: Copper alloy


Shell: Steel, Tin plated as standard

High power Contact : Brass with Gold plated

\* For Lead Free Wave Flow Process

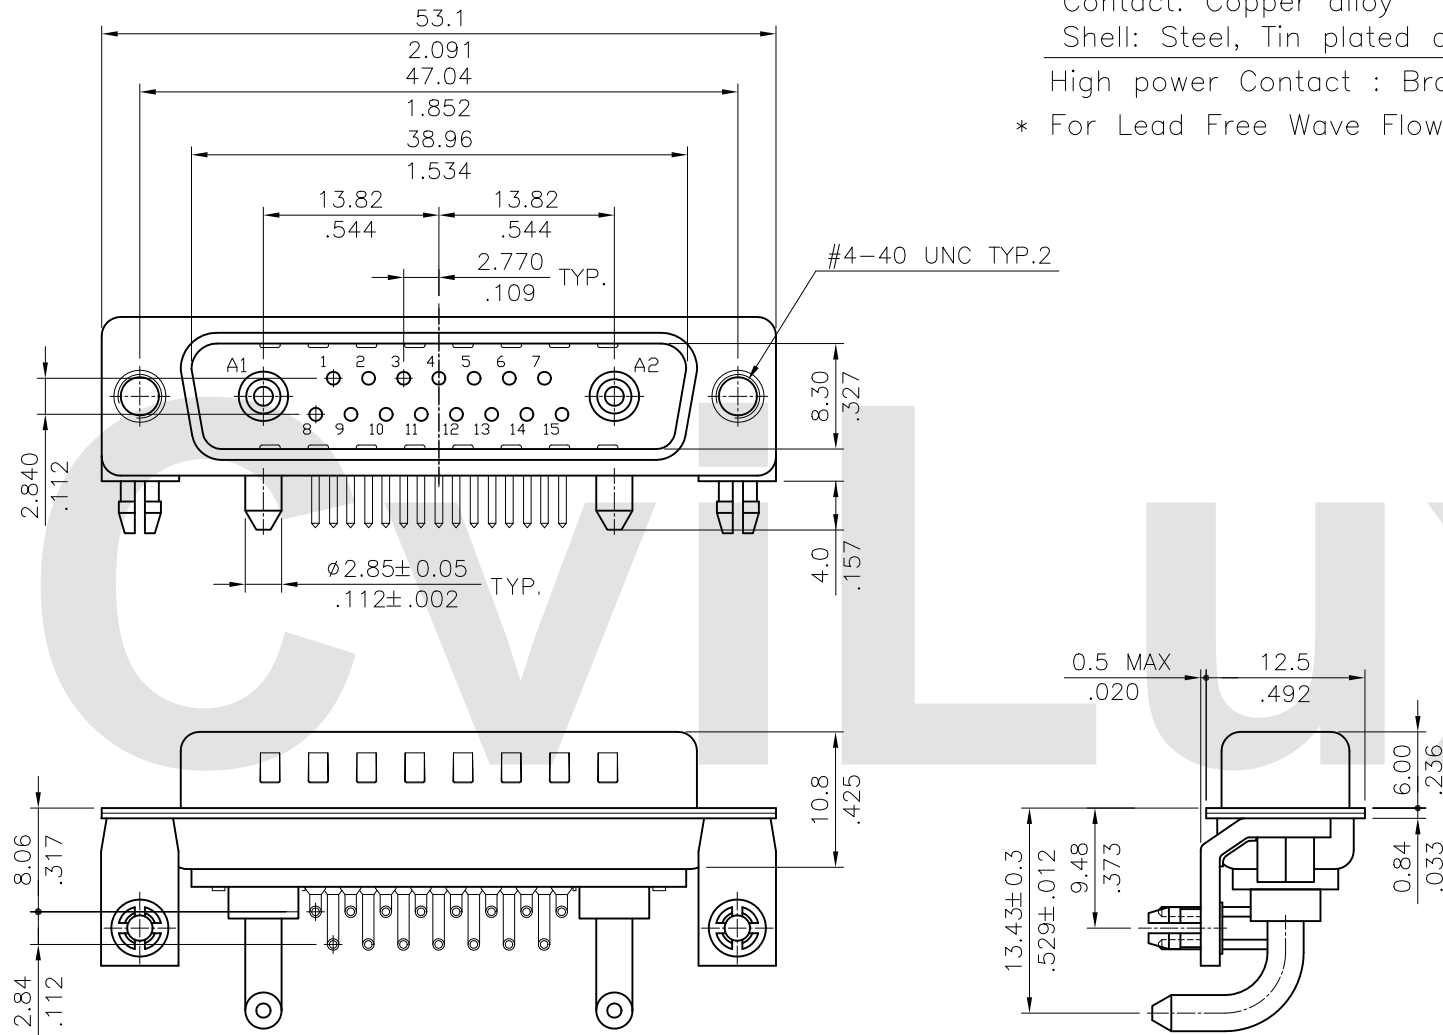

Lead Free Process  
RoHS Compliant

<table border="1"> <tr><td>4</td></tr> <tr><td>3</td></tr> <tr><td>2</td></tr> <tr><td>1</td></tr> </table>	4	3	2	1	SYM	NAME	DATE	REVISIONS	 CVILUX CORP 2017.04.27 ISSUED	DRAWN BY: Karen	4/20-17'	UNIT: mm / inch	TITLE: 17W2 20A HIGH POWER MALE D-SUB CONNECTOR (RIGHT ANGLE TYPE)	MATERIAL:	FINISH:	DRAWING NO. 17W211SC	PART NO. 17W2PPH***20***	SCALE 2 / 1	SHEET 1 OF 2
	4																		
	3																		
	2																		
1																			
ENGINEER: Sun	4/21-17'	TOLERANCE UNLESS OTHERWISE SPECIFIED																	
CHECKED BY: Eisley	4/21-17'	.X ± 0.30/.012 X: ±																	
APPROVED BY: Eisley	4/21-17'	.XX ± 0.20/.008 .X: ±																	
								.XXX ± 0.10/.004 .XX: ±											

 瀚荃股份有限公司  
CviLux Corporation

