


Notes:

- Insulator: Glass filled Polyester UL 94V-0
- Contact: Copper alloy
- Shell: Steel, Tin plated as standard

---

- Coaxial terminal
- Insulator: Teflon UL 94V-0
- Color white
- Contact: Brass
- \* For Lead Free Wave Flow Process

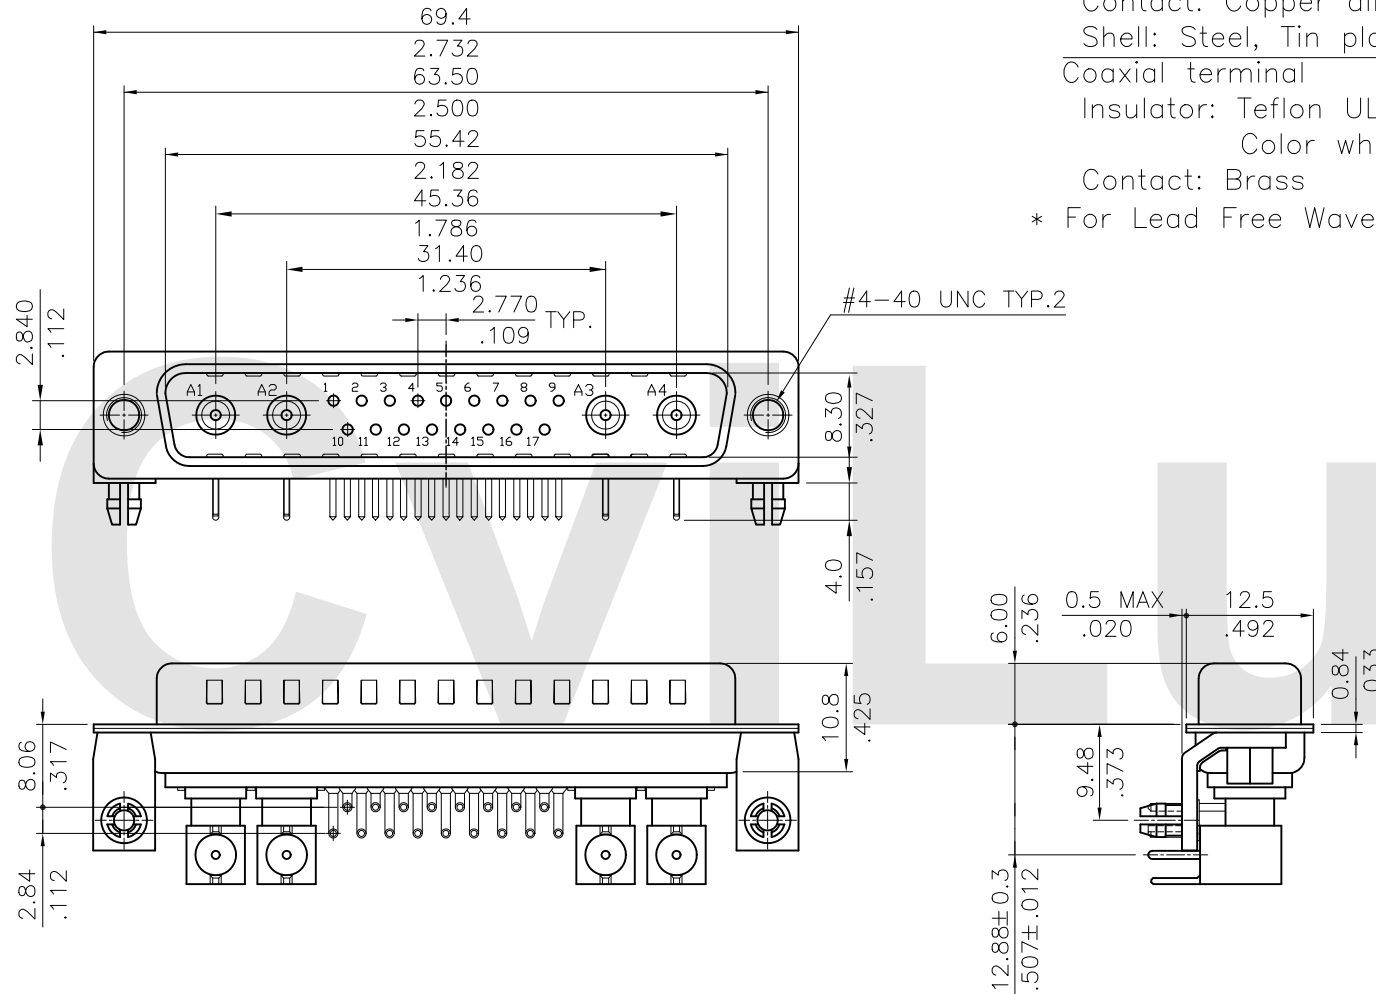

Lead Free Process  
RoHS Compliant

4						DATE	UNIT: mm / inch	TITLE: 21W4 COAXIAL MALE D-SUB CONNECTOR (RIGHT ANGLE PCB MOUNT TYPE) MATERIAL: FINISH:	瀚荃股份有限公司 CviLux Corporation	DRAWING NO. <b>21W405SC</b> PART NO. <b>21W4PCH*****</b>	
3			DRAWN BY: Karen		4/20-17'	TOLERANCE UNLESS OTHERWISE SPECIFIED	.X ± 0.30/.012 X: ± 1' .XX ± 0.20/.008 .X ± .XXX ± 0.10/.004 .XX ±				
2			ENGINEER: Sun		4/21-17'						
1	Karen	4/18-17'	CHECKED BY: Eisley		4/21-17'						
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	4/21-17'				SCALE	2 / 1	SHEET 1 OF 2

