

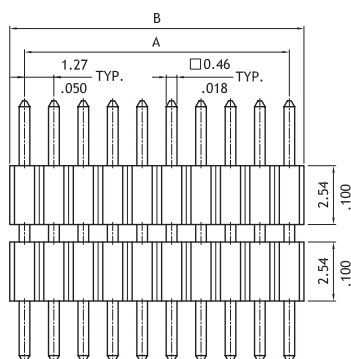
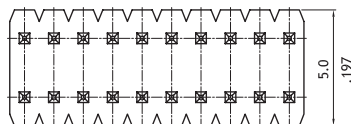


CH67 Series 1.27mm x 2.54mm Dual Rows Dual Body Pin Headers


⊙ Mates with CB61

RoHS Compliant



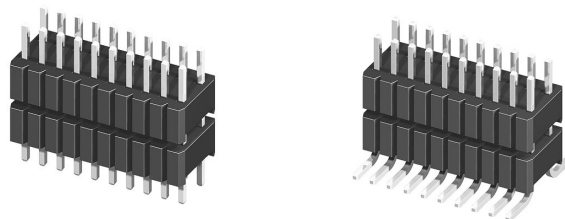


A = 1.27 X No. of Spaces
B = A + 1.27
E = 5.08 min.
Pin overall length 20.0mm max.

Option Code	Pin Dimension		
	C	D	E
00	2.8(.110)	2.6(.102)	5.08(.200)




Recommended P.C. Board Layout

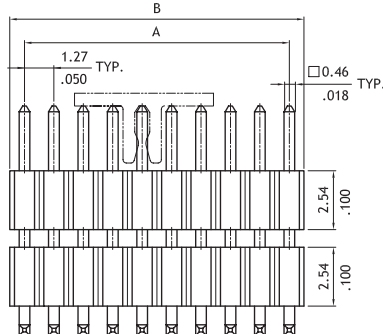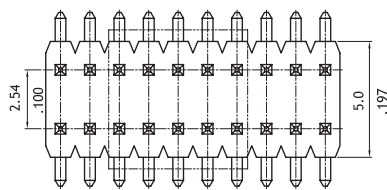

A = 1.27 X No. of Spaces
B = A + 1.27
E = 5.08 min.
Pin overall length 20.0mm max.

Option Code	Pin Dimension			
	C	D	E	F
00	2.8(.110)	1.27(.050)	5.08(.200)	7.5(.295)

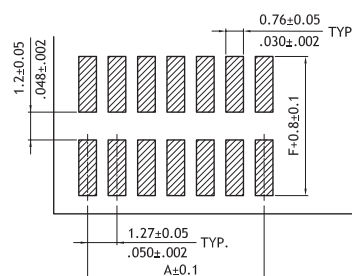

Recommended P.C. Board Layout

Ordering Code

① CH ② 6 ③ 2 ④ M ⑤ 1 ⑥ 00 - ⑦ 0 ⑧ 0

- ① Series No.
- ② Circuits:
06 to 60
- ③ Plating code:
2= Gold flash over Nickel
- ④ Tail & Mounting Style:
V= Vertical DIP Type
M= Vertical SMT Type
- ⑤ Insulator Material & Color:
1= Nylon 6T, Color Black

- ⑥ Other options: 00= Standard
* See option code table
* Consult manufacturer for customized pin length
- ⑦ Pin Size: 0= Original design
- ⑧ 0= Without Pick & Place Pad (Tube or PVC Tray)
P= With Pick & Place Pad (Tape & Reel)
*Code 7 and 8 for SMT Type only