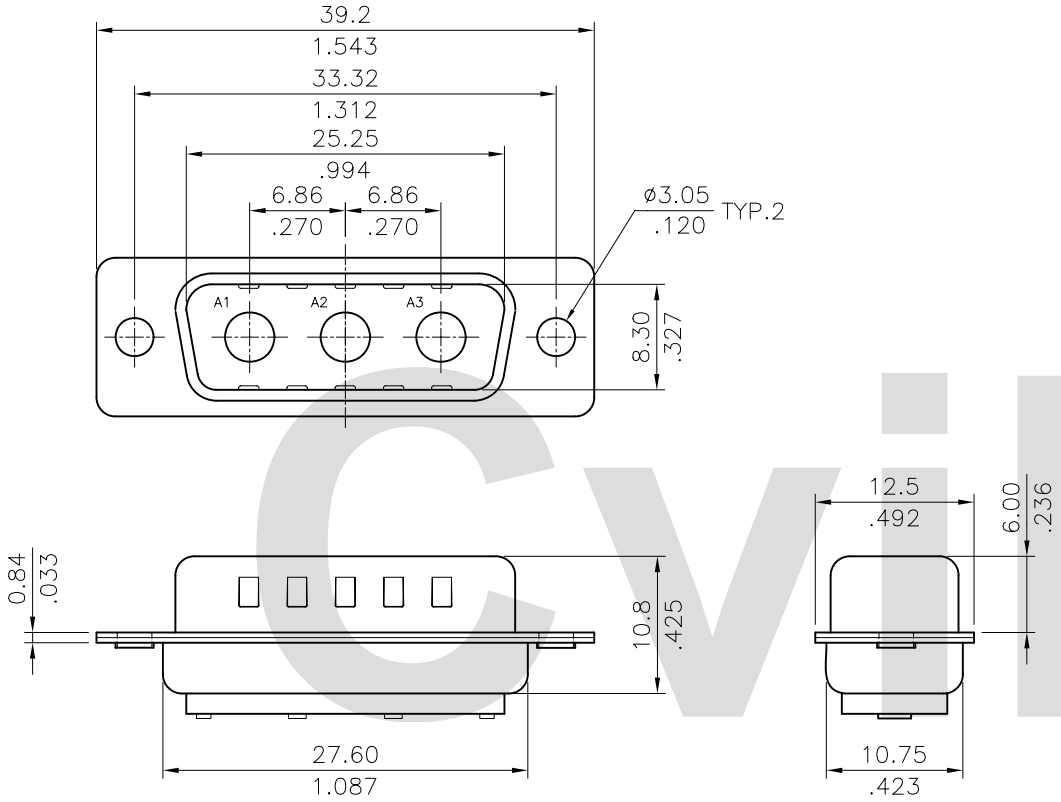

Materail:
Insulator: Glass filled Polyester UL 94V-0
Shell: Steel, Tin plated as standard

Ordering Code

C3W3 ① | P0000 ② | 100 ③ | 000 ④

① Series No.
② Connector Type:
P0000= Plug
③ Insulator Color:
100= Black
600= Green
④ Mounting Style:
000= With ø3.05mm holes on shell
A00= Riveted #4-40 UNC close nuts on front shell
B00= Riveted #4-40 UNC open nuts on front shell
C00= Riveted #4-40 UNC open nuts on rear shell

CviLux

RoHS Compliant

Mounting Style							
Code	000	Code	A00	Code	B00	Code	C00
		DIM. L= 5.8mm 		DIM. L= 4.0mm 		DIM. L= 4.0mm 	

SYM	NAME	DATE	REVISIONS			DATE
4			CVILUX.CORP. 2001.10.21 ISSUED			
3				DRAWN BY:	Eisley	10/09-01'
2				ENGINEER:	David	10/15-01'
1				CHECKED BY:	David	10/15-01'
				APPROVED BY:	Alex	10/15-01'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ± 0.30/.012	X.° ± 1°
.XX ± 0.20/.008	.X° ±
.XXX ± 0.10/.004	.XX° ±

TITLE: C3W3 MALE COMBO D-SUB CONNECTOR (SOLDER CUP TYPE)

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	C3W301SB	PART NO.	C3W3P0000*00*00
SCALE	2 / 1	SHEET	1 OF 1