
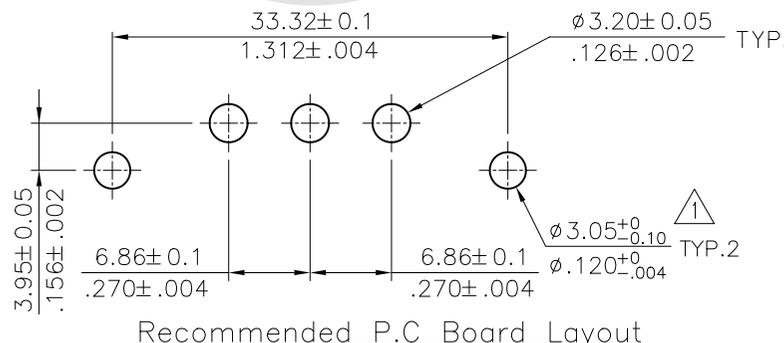


- Notes:
- * Insulator: Glass filled Polyester UL 94V-0
 - * Shell: Steel, Tin plated as standard
 - * High power Contact : Brass with Gold plated
 - * For Lead Free Wave Flow Process

Ordering Code

C3W3 P P H 3 0 1 20 I10
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- Series No.
- Connector Type: P= Plug
- Contact type: P= High Power Contact
- Contact tail style: H= Right Angle Dip type
- High power contact plating:
 2= Gold flash plated over Nickel
 3= 15μ" Gold plated over Nickel
 4= 30μ" Gold plated over Nickel
 5= 50μ" Gold plated over Nickel
- Signal contact plating:
 0= Without signal contact
- Insulator color: 1= Black, 6= Green
- Performance: 20= 20A
- Mounting Style:
 000= With ø3.05mm holes on shell
 B00= Riveted #4-40 UNC open nuts on front shell
 C00= Riveted #4-40 UNC open nuts on rear shell
 I00= Riveted #4-40 UNC ground tabs with ø3.2mm holes
 I10= Riveted #4-40 UNC ground tabs with board locks(standard)

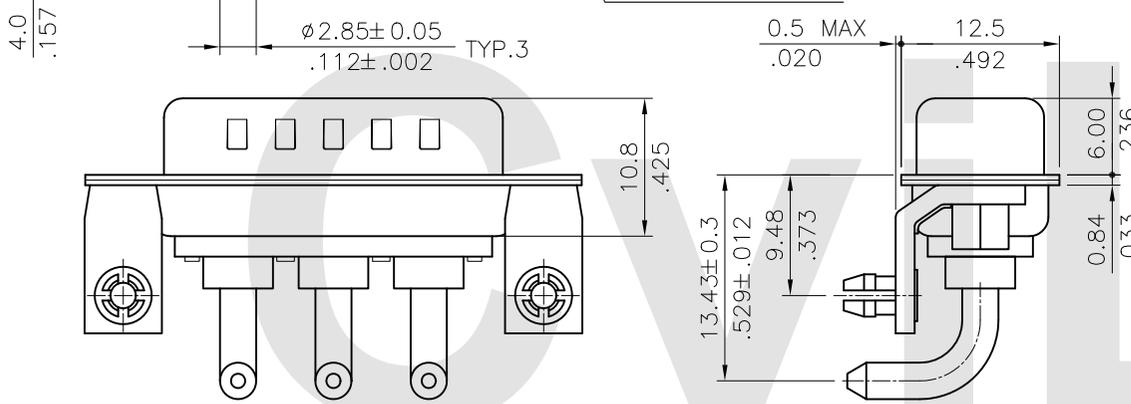

Mounting Style		Lead Free Process		RoHS Compliant					
Code	000	Code	B00	Code	C00	Code	I00	Code	I10
			DIM. L= 4.0mm 		DIM. L= 4.0mm 		øA=3.2mm 		

④					DATE	UNIT: mm / inch	TITLE: C3W3 20A HIGH POWER MALE D-SUB CONNECTOR (RIGHT ANGLE TYPE)	瀚荃股份有限公司 CviLux Corporation
③					DRAWN BY: Karen 3/20-17'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
②					ENGINEER: Sun 3/20-17'	.X ± 0.30/.012 X: ± .1'	FINISH:	DRAWING NO. C3W311SC PART NO. C3W3PPH*0*20***
①	Karen	3/3-17'	ECNT117049/ECRT117003		CHECKED BY: Eisley 3/22-17'	.XX ± 0.20/.008 .X ±		SCALE 2 / 1 SHEET 1 OF 1
SYM	NAME	DATE	REVISIONS		APPROVED BY: Eisley 3/22-17'	.XXX ± 0.10/.004 .XX ±		

CIVILUX CORP
 2017.03.23
 ISSUED