

Material:

Insulator: Glass filled Polyester UL 94V-0

Contact: Copper alloy

Shell: Steel, Tin plated as standard

Ordering Code

C7W2 S0 S0 A 100 000
① ② ③ ④ ⑤ ⑥

① Series No.

② Connector Type:

S0= Receptacle

③ Contact tail style:

S0= Solder Cup type

④ Singal Contact Plating:

A= Seletive Gold flash plated over Nickel

B= Seletive 15 μ " Gold plated over Nickel

C= Seletive 30 μ " Gold plated over Nickel

⑤ Insulator Color:

100= Black

600= Green

⑥ Mounting Style:

000= With ϕ 3.05mm holes on shell(Standard)





A00= Riveted #4-40 UNC close nuts on front shell

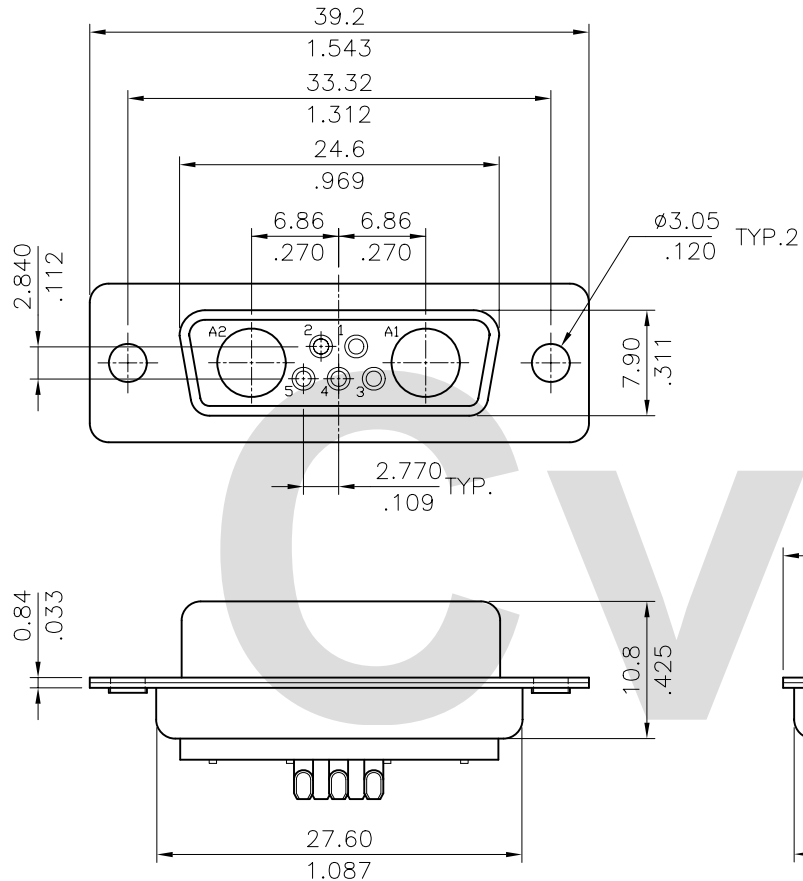
B00= Riveted #4-40 UNC open nuts on front shell

C00= Riveted #4-40 UNC open nuts on rear shell

Mounting Style

RoHS Compliant

Code	000	Code	A00	Code	B00	Code	C00
		DIM. L= 5.8mm 		DIM. L= 4.0mm 		DIM. L= 4.0mm 	



4					DATE	UNIT: mm / inch	TITLE: C7W2 FEMALE COMBO D-SUB CONNECTOR (SOLDER CUP TYPE)	 瀚荃股份有限公司 CviLux Corporation			
3					DRAWN BY: Eisley	10/09-01'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
2					ENGINEER: David	10/15-01'	.X $\pm$ 0.30/.012 X' $\pm$ 1'	DRAWING NO. C7W202SB PART NO. C7W2S0S0**00*00			
1					CHECKED BY: David	10/15-01'	.XX $\pm$ 0.20/.008 X' $\pm$				
SYMBOL	NAME	DATE	REVISIONS	APPROVED BY: Alex	10/15-01'	.XXX $\pm$ 0.10/.004 X' $\pm$	FINISH:	SCALE	2 / 1	SHEET	1 OF 1