

Notes:


Insulator: Glass filled Polyester UL 94V-0

Contact: Copper alloy

Shell: Steel, Tin plated as standard

High power Contact : Brass with Gold plated

* For Lead Free Wave Flow Process

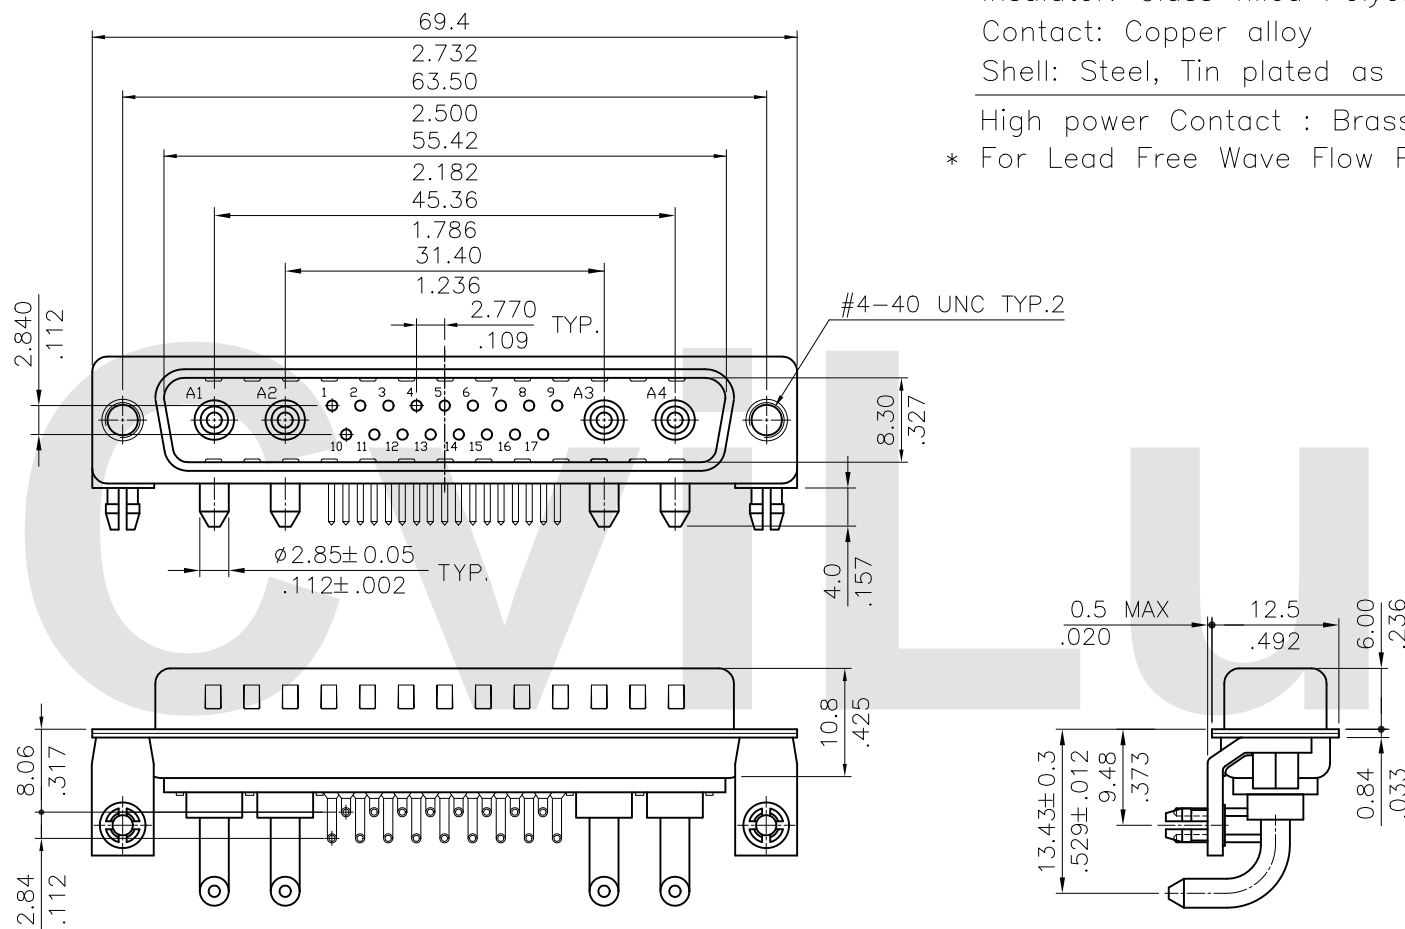

Lead Free Process

RoHS Compliant

	 CVILUX CORP 2017.04.27 ISSUED			DATE	UNIT: mm / inch	TITLE: 21W4 20A HIGH POWER MALE D-SUB CONNECTOR (RIGHT ANGLE TYPE) MATERIAL: FINISH:	瀚荃股份有限公司 CviLux Corporation				
				DRAWN BY: Karen	4/20-17'					TOLERANCE UNLESS OTHERWISE SPECIFIED	
				ENGINEER: Sun	4/21-17'					.X ± 0.30/012	X' ± 1'
				CHECKED BY: Eisley	4/21-17'					.XX ± 0.20/008	.X' ±
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	4/21-17'	.XXX ± 0.10/004	.XX' ±	DRAWING NO. 21W411SC	PART NO. 21W4PPH***20***		
SCALE		2 / 1		SHEET 1 OF 2							

