
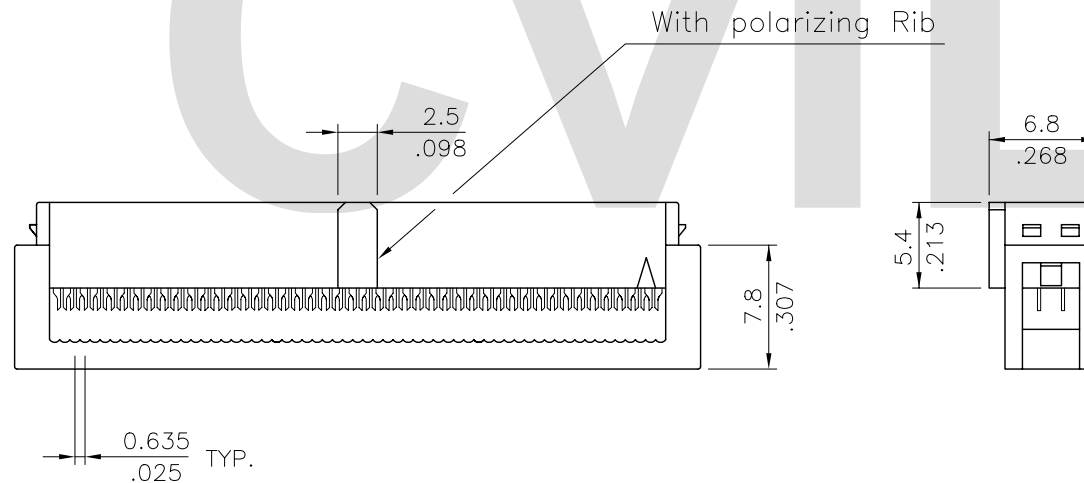


- * Insulation: Glass filled polyester UL 94V-0
- * Contact: Phosphor Bronze

CA01	**	S	A	1	00
①	②	③	④	⑤	⑥

- ① Series No.
- ② No. of Circuits:
- ③ Contact type: S= Socket
- ④ Plating option :
- A= Selective Gold flash plated over
1.27 μ m(50 μ "") Nickel
- B= Selective 0.38 μ m(15 μ "") Gold Plated over
1.27 μ m(50 μ "") Nickel
- C= Selective 0.76 μ m(30 μ "") Gold plated over
1.27 μ m(50 μ "") Nickel
- ⑤ Color: 1= Black
- ⑥ Option: 00= Standard

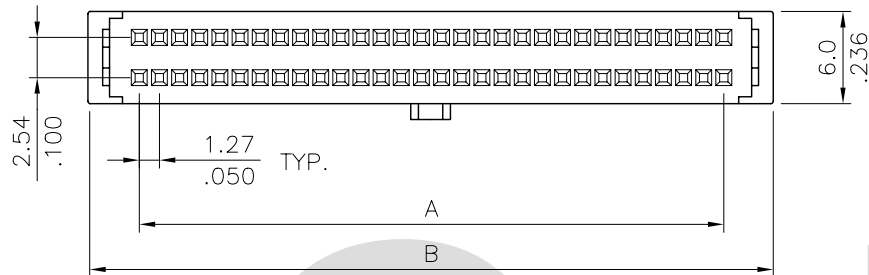

Circuits	Dimension	
	A	B
10	5.08(.200)	11.20(.441)
20	11.43(.450)	17.55(.691)
26	15.24(.600)	21.36(.841)
30	17.78(.700)	23.90(.941)
34	20.32(.800)	26.44(1.041)
40	24.13(.950)	30.25(1.191)
50	30.48(1.200)	36.60(1.441)
60	36.83(1.450)	42.95(1.691)
68	41.91(1.650)	48.03(1.891)
70	43.18(1.700)	49.30(1.941)
80	49.53(1.950)	55.65(2.191)
90	55.88(2.200)	62.00(2.441)
X1	62.23(2.450)	68.35(2.691)

RoHS Compliant

4			CIVILUX CORP. 2003.01.27 ISSUED			DATE	UNIT: mm / inch		TITLE: 1.27MM(.050") RIBBON CABLE IDC CONNECTOR	 瀚荃股份有限公司 CviLux Corporation	
3				DRAWN BY:	Alphonse	1/22-03"	TOLERANCE UNLESS OTHERWISE SPECIFIED				MATERIAL:
2				ENGINEER:	David	1/23-03"	.X ± 0.25 / .010	X" ± 1"	FINISH:		
1				CHECKED BY:	David	1/23-03"	.XX ± 0.15 / .006	X" ±			
Sym	NAME	DATE	REVISIONS	APPROVED BY:	Alex	1/23-03"	.XXX ± 0.08 / .003	.XX" ±		DRAWING NO. CA0101SC SCALE 2 / 1	PART NO. CA01**S*100 SHEET 1 OF 1