

Notes:


Insulator: Glass filled Polyester UL 94V-0

Contact: Copper alloy

Shell: Steel, Tin plated as standard

High power Contact : Brass with Gold plated

* For Lead Free Wave Flow Process

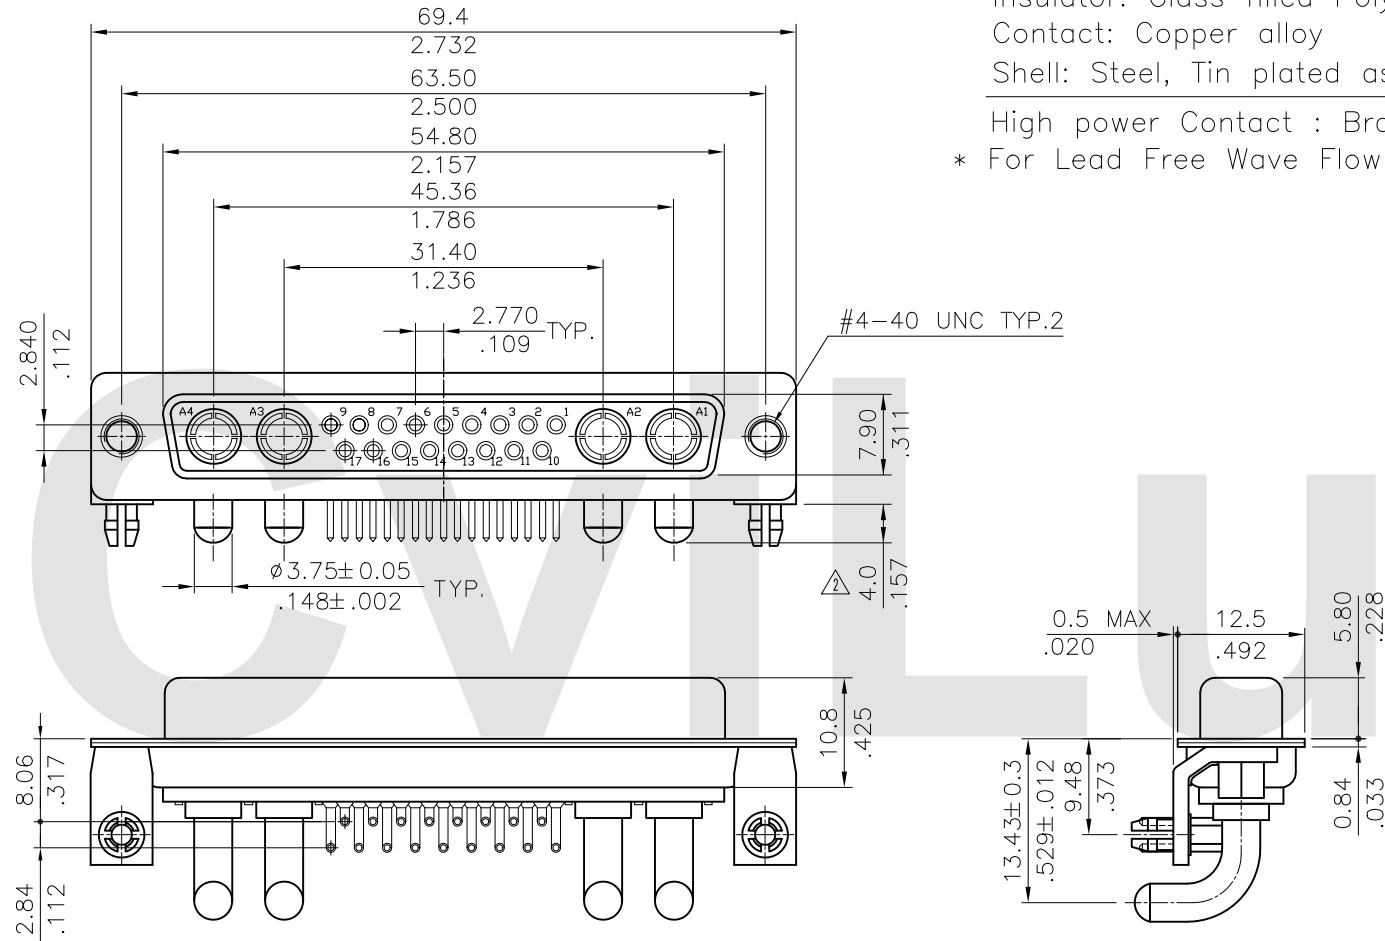

Lead Free Process

RoHS Compliant

				 2017.04.27 ISSUED		DATE	UNIT: mm / inch	TITLE: 21W4 40A HIGH POWER FEMALE D-SUB CONNECTOR (RIGHT ANGLE TYPE) MATERIAL: FINISH:	瀚荃股份有限公司 CviLux Corporation		
	4	Karen	4/18-17'		ECNT117049/ECRT117003	DRAWN BY:	Karen			4/20-17'	TOLERANCE UNLESS OTHERWISE SPECIFIED
	3	Jim	10/13/06'		ECR06094-0/ECN06369	ENGINEER:	Sun			4/21-17'	.X ± 0.30/.012 X: ± 1'
	2	SUN	3/24/05'		ECR05025-0/ECN05095	CHECKED BY:	Eisley			4/21-17'	.XX ± 0.20/.008 .X: ±
1					APPROVED BY:	Eisley	4/21-17'	.XXX ± 0.10/.004 .XX ±	DRAWING NO. 21W414SE PART NO. 21W4SPH***40*** SCALE 2 / 1 SHEET 1 OF 2		

