

Material:

- △2 △3 * Insulator: LCP With 40% G.F.
UL 94V-0 Color Black
- * Contact: Phosphor Bronze


Ordering Code:

CB01 ** * D 1 00
① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② No. of Contact: 04 to 50
- △③ Plating code:
2= Gold flash plated over 1.27μm(50μ") Nickel
3= 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
4= 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
- ④ Tail Style: D = DIP Type
- ⑤ Insulator Color: 1 = Black
- ⑥ Other option:

DIM. A = 1.27 X No. of Spaces
DIM. B = DIM. A + 1.67

* Available in 4 through 50 Circuits

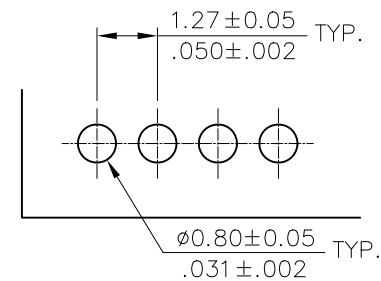

Recommended P.C. Board Layout

Lead Free Process

RoHS Compliant

CVILUX CORP
2016.04.07
ISSUED

△4					DATE	UNIT: mm / inch	TITLE: PITCH 1.27mm(.050") DIP TYPE SOCKET	 瀚荃股份有限公司 CviLux Corporation								
△3	Sandy	3/29-16'	ECNT116051/ECRB116009	DRAWN BY:	Sandy 3/29-16'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:				DRAWING NO.	CB0101SD	PART NO.	CB01***D100		
△2	Sandy	4/30-07'	ECN07156/ECR07018-1	ENGINEER:	Sun 3/31-16'						.X ± 0.25/.010	.X' ± 1"	SCALE	6 / 1	SHEET	1 OF 1
△1	SUN	10/15/04'	ECR04056-1/ECN04394	CHECKED BY:	Eisley 3/31-16'						.XX ± 0.15/.006	.X' ±				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley 3/31-16'	.XXX ± 0.08/.003	.XX' ±									