


Material:

- ② \* Insulator: LCP With 40% G.F.  
UL 94V-0 Color Black
- \* Contact: Phosphor Bronze
- ③ \* Pick & Place Pad:  
Nylon 6T With 30% GF.  
UL 94V-0 Color Nature

Ordering Code:

CB01 \*\* \* M 1 00 - 2 P  
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② No. of Contact: 04 to 50
- ③ Plating code:  
2= Gold flash plated over 1.27μm(50μ") Nickel  
3= 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel  
4= 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
- ④ Tail Style: M = SMT Type
- ⑤ Insulator Color: 1 = Black
- ⑥ Other option:
- ⑦ Pin Size for mate Pin header:  
2=0.4 Square Pin
- ⑧ 0=Without Pick & Place Pad  
P=With Pick & Place Pad

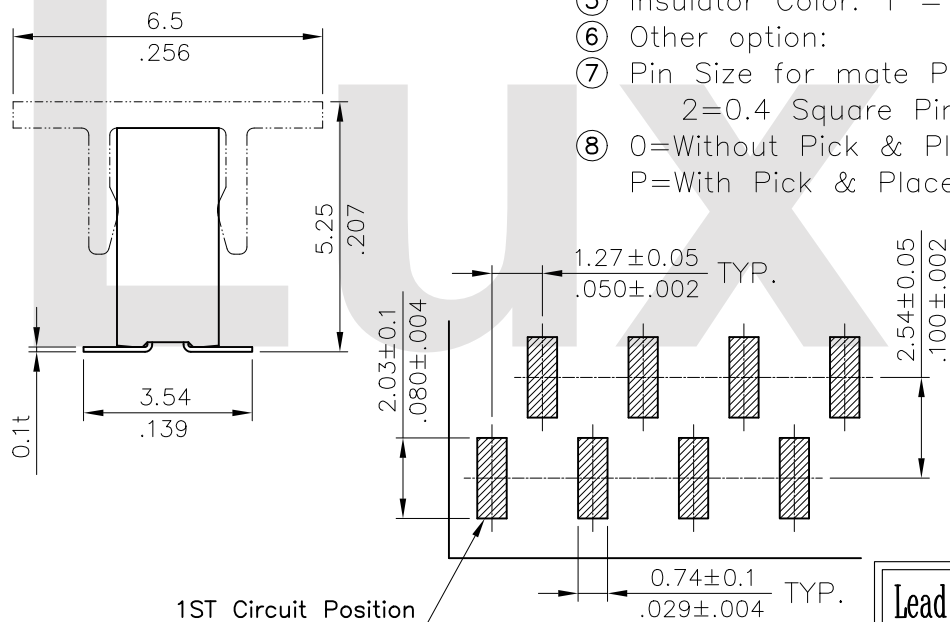

DIM. A = 1.27 X No. of Spaces  
DIM. B = DIM. A + 1.67

\* Available in 4 through 50 Circuits

Recommended P.C. Board Layout

Lead Free Process

RoHS Compliant



④	Sandy	3/29-16'	ECNT116051/ECRB116009	2016.04.07	DATE	UNIT: mm / inch	TITLE: PITCH 1.27mm(.050") SMT TYPE SOCKET	 瀚荃股份有限公司 CviLux Corporation
③	Sandy	2/19-09'	ECN09066/ECR08097-0	ISSUED	DRAWN BY: Sandy	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
②	Sandy	4/30-07'	ECN07156/ECR07018-1		ENGINEER: Sun	.X ± 0.25/.010 X' ± 1"	FINISH:	
①	SUN	10/15/04'	ECR04056-1-ECN04394		CHECKED BY: Eisley	.XX ± 0.15/.006 .X' ±	DRAWING NO. CB0102SE PART NO. CB01***M100-2*	
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	3/31-16'	.XXX ± 0.08/.003 .XX' ±	SCALE 6 / 1	SHEET 1 OF 1