

Material:

* Insulation: Glass filled polyester UL 94V-0

* Contact: Phosphor Bronze

Ordering Code:

CB37 ** A V 1 00
 ① ② ③ ④ ⑤ ⑥

① Series No.

② NO. of Circuits:

③ Plating code:

A= Selective Gold flash plated over 1.27μm(50μ") Nickel

④ Tail Style: V= Straight

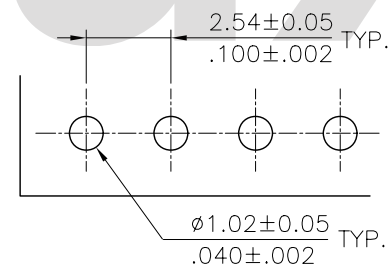
⑤ Color: 1= Black

⑥ Other options: 00= Standard

A = 2.54 * No. of Spaces



B = A + 2.5

△ * Available in 2 through 40 circuits



Recommended P.C. Board Layout

RoHS Compliant

| | | | | | | | | | | | | | | | | |
|-----|------|----------|---------------------|---|---------------|----------|-----------------|---|--|---|-------------------|----------|--------------------------------------|-----------|----------------------|----------------------|
| 4 | Sun | 5/16-07' | ECR07066-0/ECN07192 |  | DRAWN BY: Sun | 5/16-07' | UNIT: mm / inch | TITLE: 2.54MM(.100") SINGLE ROW BOARD MOUNT CONNECTOR |  瀚荃股份有限公司 CviLux Corporation | | | | | | | |
| | | | | | | | | | | 3 | ENGINEER: Easley | 5/16-07' | TOLERANCE UNLESS OTHERWISE SPECIFIED | MATERIAL: | DRAWING NO. CB3701SF | PART NO. CB37**AV100 |
| | | | | | | | | | | 2 | CHECKED BY: David | 5/16-07' | .X ± 0.30/.012 X: ± 1' | FINISH: | SCALE 3 / 1 | SHEET 1 OF 1 |
| | | | | | | | | | | 1 | APPROVED BY: Alex | 5/16-07' | .XX ± 0.20/.008 X: ± | | | |
| SYM | NAME | DATE | REVISIONS | | APPROVED BY: | DATE | | | | | | | | | | |