
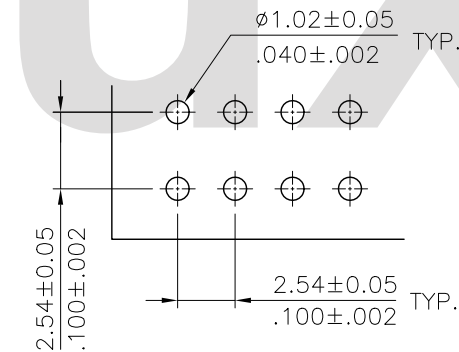
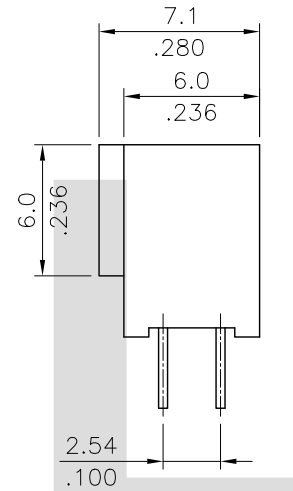
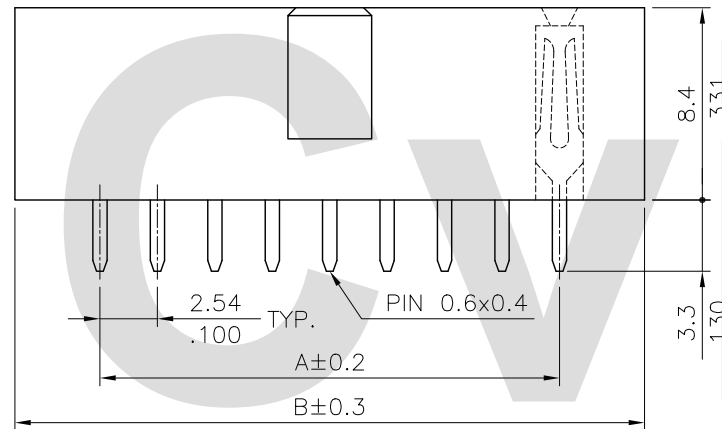


Material:

* Insulation: Glass filled polyester UL 94V-0

* Contact: Phosphor Bronze

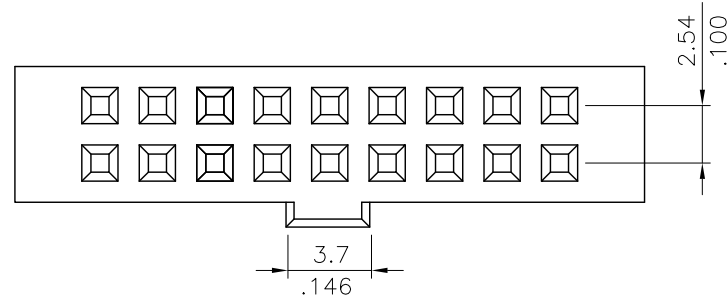

Ordering Code:

CB94 ** 2 V 1 00
① ② ③ ④ ⑤ ⑥

① Series No.

② NO. of Circuits:

③ Plating code:

2= Gold flash plated over
1.27μm(50μ") Nickel

④ Tail Style: V= Straight

⑤ Color: 1= Black

⑥ Other options: 00= Standard

A = 2.54 * No. of Spaces

B = A + 7.34

* Available circuits: 6,8,10,12,14,16,20,24,26,
30,34,40 and 50

Recommended P.C. Board Layout

RoHS Compliant

CVILUX CORP 2010.08.10 ISSUED						DATE	UNIT: mm / inch		TITLE: 2.54MM(.100")		 瀚荃股份有限公司 CviLux Corporation					
				DRAWN BY:	Sun	8/02-10'	TOLERANCE UNLESS OTHERWISE SPECIFIED		DUAL ROW BOARD MOUNT CONNECTOR							
				ENGINEER:	Eisley	8/03-10'			MATERIAL:							
2		Sun	8/02-10'	ECR10108-0/ECN10270		ENGINEER:	Eisley	8/03-10'	.X ± 0.30 / .012	X' ± 1"	FINISH:		DRAWING NO.	CB9401SD	PART NO.	CB94**2V100
1		Sun	7/07-05'	ECR05063-0/ECN05236		CHECKED BY:	David	8/03-10'	.XX ± 0.20 / .008	X' ±			SCALE	3 / 1	SHEET	1 OF 1
SYM		NAME	DATE	REVISIONS		APPROVED BY:	David	8/03-10'	.XXX ± 0.10 / .004	.XX' ±						