
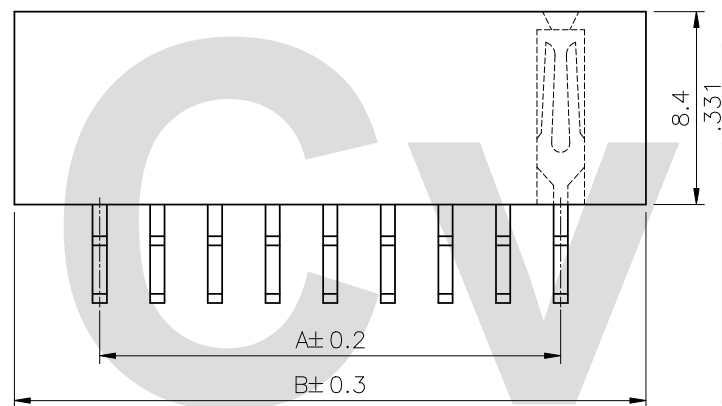


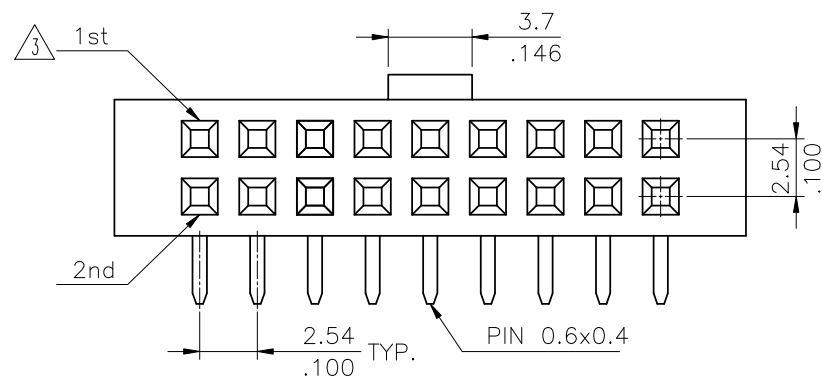

A = 2.54 * No. of Spaces

B = A + 7.34

* Available circuits: 6,8,10,12,14,16,20,24,26,
30,34,40,50,60 and 64


Note:

- * Insulation: Glass filled polyester UL 94V-0
- * Contact: Phosphor Bronze
- * For Tin-Lead wave flow process

Ordering Code:

CB94 ** 2 H 1 00
① ② ③ ④ ⑤ ⑥

- ① Series No.
② NO. of Circuits:
③ Plating code:
2= Gold flash plated over
1.27μm(50μ") Nickel
④ Tail Style: H= Right angle
⑤ Color: 1= Black
⑥ Other options: 00= Standard

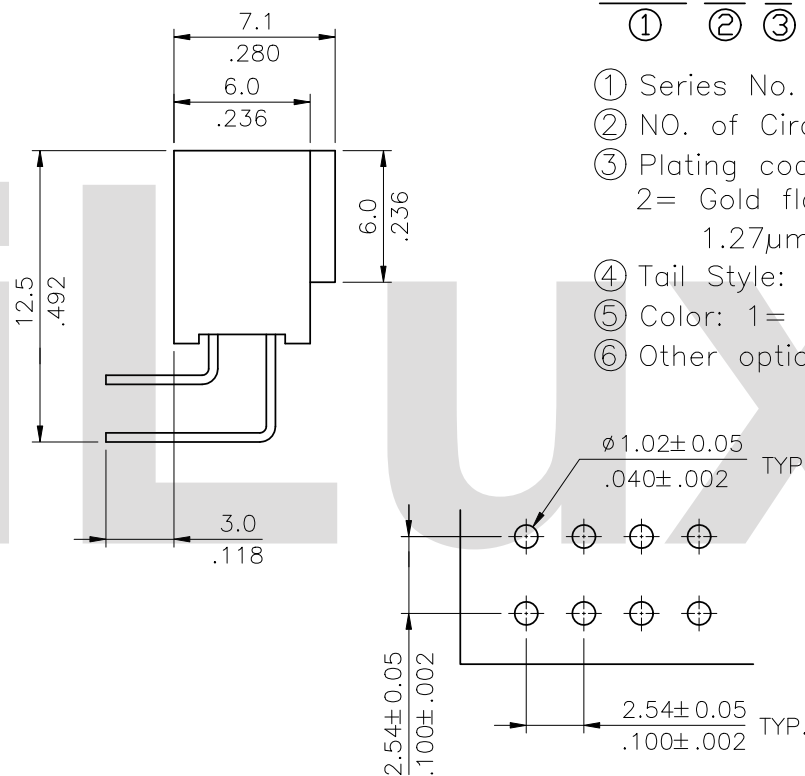

Recommended P.C. Board Layout

Tin-Lead Process

RoHS Compliant

4				CVILUX CORP		DATE	UNIT: mm / inch	TITLE: 2.54MM(.100") DUAL ROW SIDE ENTRY BOARD MOUNT CONNECTOR	 瀚荃股份有限公司 CviLux Corporation			
3	SUN	9/17-14'	ECNT114197	2014.09.24	DRAWN BY: Sun	9/17 14'	TOLERANCE UNLESS OTHERWISE SPECIFIED	SIDE ENTRY BOARD MOUNT CONNECTOR				
2	Jim	8/29/06'	ECN06311	ISSUED	ENGINEER: Eisley	9/18 14'	.X ± 0.30 / .012 .XX ± 0.20 / .008 .XXX ± 0.10 / .004	MATERIAL:	DRAWING NO.	CB9402SE	PART NO.	CB94**2H100
1	SUN	7/07/05'	ECR05063-0/ECN05236		CHECKED BY: Eisley	9/18 14'	X' ± 1" X' ± XX' ±	FINISH:	SCALE	3 / 1	SHEET	1 OF 1
SYM	NAME	DATE	REVISIONS		APPROVED BY: David	9/18 14'						