

Material:

Insulator: Glass filled Polyester UL 94V-0

Contact: Copper alloy

Shell: Steel, Tin plated as standard

Ordering Code

25W3 S0 S0 A 100 000
① ② ③ ④ ⑤ ⑥

① Series No.

② Connector Type:

S0= Receptacle

③ Contact tail Style:

S0= Solder Cup type

④ Signal Contact Plating:

A= Seletive Gold flash plated over Nickel

B= Seletive 15 μ " Gold plated over Nickel

C= Seletive 30 μ " Gold plated over Nickel

⑤ Insulator Color:

100= Black

600= Green


⑥ Mounting Style:

000= With $\phi 3.05$ mm holes on shell

A00= Riveted #4-40 UNC close nuts on front shell

B00= Riveted #4-40 UNC open nuts on front shell

C00= Riveted #4-40 UNC open nuts on rear shell

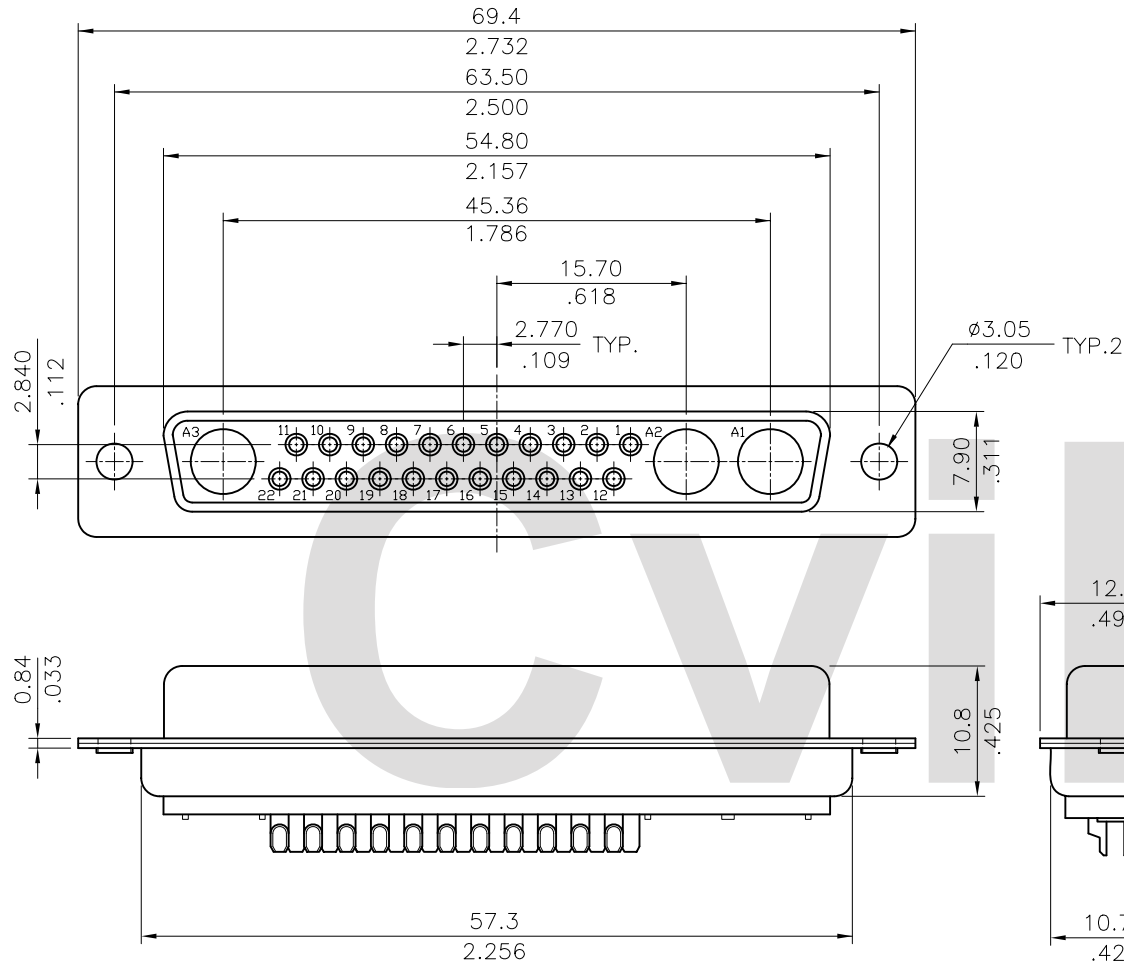

Mounting Style

RoHS Compliant

Code	000	Code	A00	Code	B00	Code	C00
DIM. L= 5.8mm		DIM. L= 4.0mm		DIM. L= 4.0mm		DIM. L= 4.0mm	

4					DATE	UNIT: mm / inch	TITLE: 25W3 FEMALE COMBO D-SUB CONNECTOR (SOLDER CUP TYPE)	 瀚荃股份有限公司 CviLux Corporation			
3					DRAWN BY: James	11/18-02'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
2					ENGINEER: David	11/18-02'	.X $\pm 0.30/.012$ X' $\pm$ 1'	DRAWING NO. 25W302SC PART NO. 25W3S0S0**00*00			
1					CHECKED BY: David	11/18-02'	.XX $\pm 0.20/.008$ X' $\pm$				
SYM	NAME	DATE	REVISIONS		APPROVED BY: Alex	11/18-02'	.XXX $\pm 0.10/.004$ X' $\pm$	FINISH:	SCALE	2 / 1	SHEET 1 OF 1

