



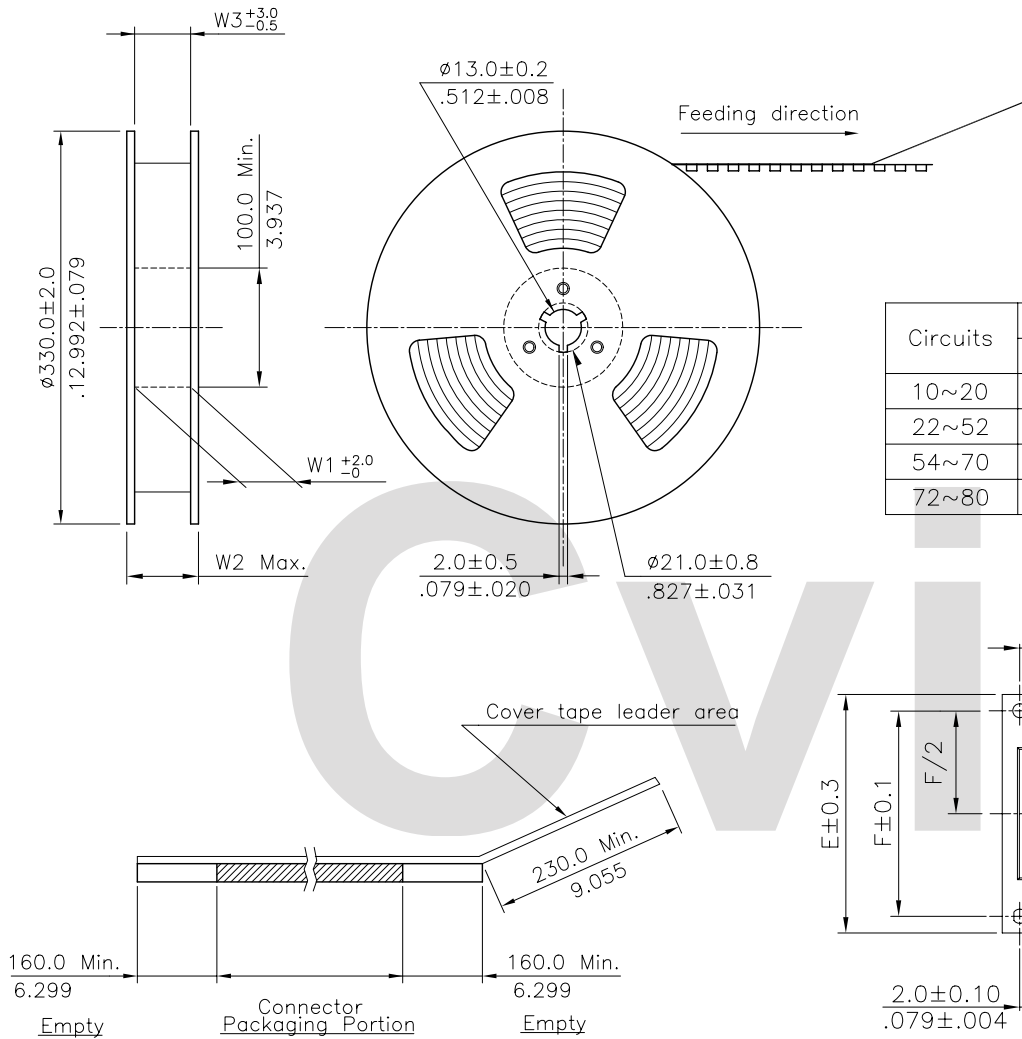


NOTES:

1. 10 sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1 mm in 250 mm.
3. Material : Clear,Transparent Polystyrene Alloy (UP-6000).
4. All dimensions meet EIA-481-B requirements.
5. Thickness : 0.30 ± 0.05 mm.
6. Packing length per 22" reel : 67 Meters.
7. Component load per 13" reel : 2000 pcs.

Circuits	Dimension					Packing (Reel/Caton)
	E	F	W1	W2	W3	
10~20	16.0(.630)	—	16.5(.650)	22.5(.886)	16.5(.650)	11
22~52	24.0(.945)	—	24.5(.965)	30.5(1.200)	24.5(.965)	9
54~70	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
72~80	44.0(1.732)	40.40(1.591)	44.5(1.752)	50.5(1.988)	44.5(1.752)	5

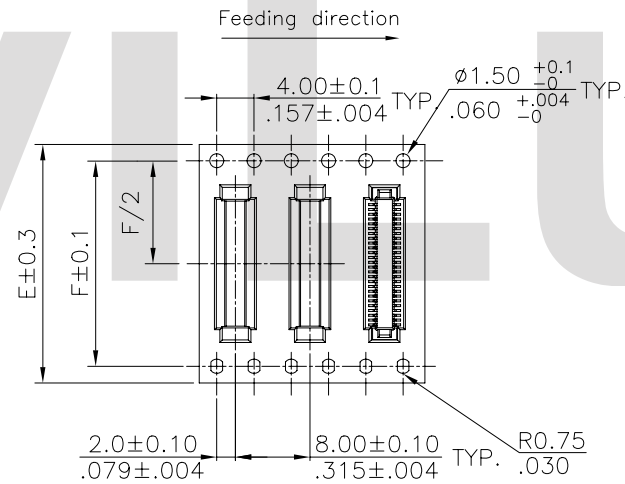

WIDTH : 32.44 mm Carrier

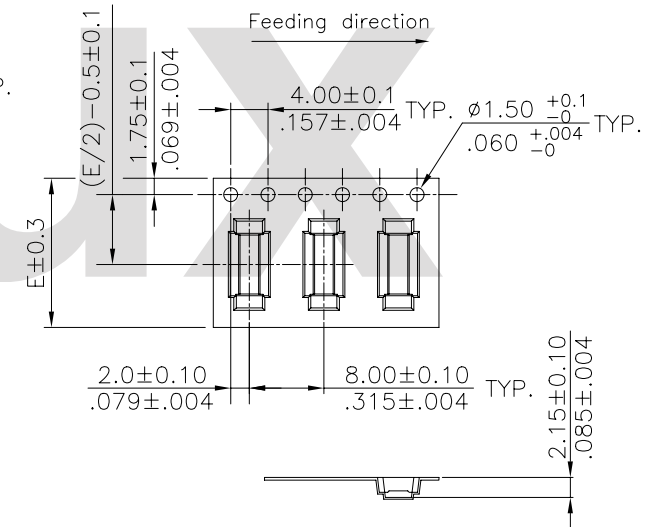

WIDTH : 16.24 mm Carrier

4					DATE	UNIT: mm / inch	TITLE: TAPE & REEL PACKAGING FOR CBRC PLUG SERIES	 瀚菱股份有限公司 CviLux Corporation			
3					DRAWN BY: Hank	TOLERANCE UNLESS OTHERWISE SPECIFIED					
2	HANK	9/26-06'	ECN06340		ENGINEER: Easley	.X ±	X' ± I'	MATERIAL:	DRAWING NO.	CBRC04SC	PART NO.
1	JASON	10/28-04	ECN04418		CHECKED BY: David	.XX ±	.X' ±	FINISH:	SCALE		SHEET 1 OF 1
SYM	NAME	DATE	REVISIONS		APPROVED BY: Alex	.XXX ±	.XX' ±				