


Wire Range	Insulation Diameter	Reel Q'ty
AWG #26~#30	1.40 (.055) MAX.	10,000 PCS.

Ordering Code :

$\frac{CD02}{①}$
 $\frac{T01}{②}$
 $\frac{A}{③}$
 $\frac{B}{④}$
 $\frac{P}{⑤}$
 $\frac{P}{⑥}$

- ① Series No.
- ② Terminal version: T01= For AWG #26~#30
- ③ Plating code:
 2= Gold flash plated over 1.27 μ m(50 μ "") Nickel
 A= Selective Gold flash plated over 1.27 μ m(50 μ "") Nickel
 B= Selective 0.38 μ m(15 μ "") Gold plated over 1.27 μ m(50 μ "") Nickel
 C= Selective 0.76 μ m(30 μ "") Gold plated over 1.27 μ m(50 μ "") Nickel
- ④ Material: B= Brass
- ⑤ Plating method: P= Post plating
- ⑥ Type: P= Plug terminal

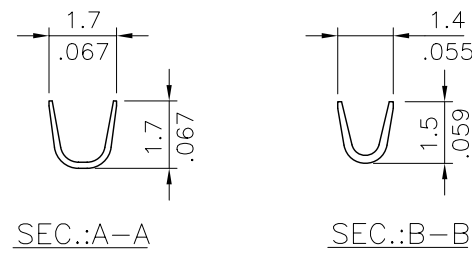

RoHS Compliant

			DRAWN BY: Sun ENGINEER: Eisley CHECKED BY: David APPROVED BY: David		DATE	UNIT: mm / inch	TITLE: CRIMP TERMINAL	瀚荃股份有限公司 CviLux Corporation			
					12/03-07'	TOLERANCE UNLESS OTHERWISE SPECIFIED					DRAWING NO. CD0206SE PART NO. CD02T01*BPP SCALE 5 / 1 SHEET 1 OF 1
					12/03-07'	.X ± 0.20/.008 X' ± 1'					
					12/03-07'	.XX ± 0.10/.004 X' ±					
SYM	NAME	DATE	REVISIONS	APPROVED BY:	DATE	.XXX ± 0.05/.002 .XX' ±	FINISH:				