


Material:

\* Insulator: Glass filled polyester UL 94V-0

\* Contacts: Copper alloy

\* Shell: Steel, Tin plated as standard

Recommended P.C. Board Layout see drawing No. CD0506S\*

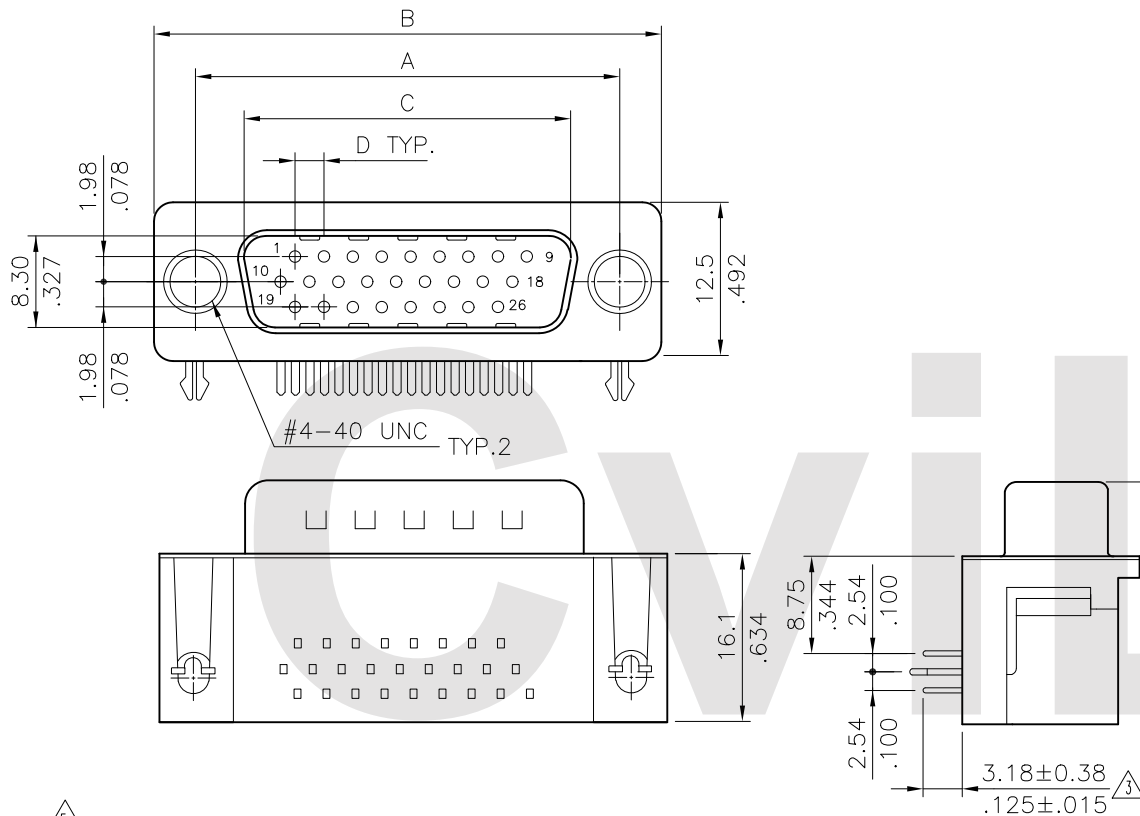

Ordering Code:

CD05 26 P 2 1 F0  
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② No. of Circuits
- ③ Contact type: P= Plug(Male)
- ④ Plating option:  
 2= Gold flash plated over Nickel  
 A= Selective Gold flash plated over Nickel  
 B= Selective 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel  
 C= Selective 0.76um(30μ") Gold plated over 1.27μm(50μ") Nickel
- ⑤ Color: 1= Black; 0= White; 7= Blue
- ⑥ Other Option:  
 F0= Riveted ground hooks with #4-40 UNC open (Standard)  
 G0= Riveted ground hooks pre-loaded #4-40 UNC Hex screw (For Circuits 15, 44)  
 I0= Riveted ground tabs thread #4-40 UNC open and ground tabs with ø3.05mm holes  
 J0= Assembly ground hooks by #4-40 UNC Hex screw

Mounting Style		Lead Free Process		RoHS Compliant			
Code	F0	Code	G0	Code	I0	Code	J0
		DIM. L= 4.8mm 				DIM. L= 4.8mm 	

CVILUX CORP  
 2015.12.03  
 ISSUED

⑤	Karen	11/20-15'	ECNT115246/ECRT115101	2015.12.03	DATE	UNIT: mm / inch	TITLE: HIGH-DENSITY D-SUB PCB MOUNT MALE CONNECTOR	瀚荃股份有限公司 CviLux Corporation
④	Karen	9/22-15'	ECNT115220/ECRT115084	ISSUED	DRAWN BY: Karen	11/23-15'	TOLERANCE UNLESS OTHERWISE SPECIFIED	
③	Karen	10/16-14'	ECNT114233/ECRT114080		ENGINEER: Sun	11/23-15'	.X ± 0.30/.012 X' ± 1'	
②	Karen	4/30-12'	ECR12023-0/ECN12067-0		CHECKED BY: Eisley	11/26-15'	.XX ± 0.20/.010 .X' ±	
SYM	NAME	DATE	REVISIONS		APPROVED BY: Eisley	11/26-15'	.XXX ± 0.10/.004 .XX' ±	MATERIAL:  FINISH:
							DRAWING NO. CD0504SK	PART NO. CD05**P*1**
							SCALE 2 / 1	SHEET 1 OF 1