



Port No.	Wire Range	Insulation Diameter	Reel Q'ty
CD52T02*BPP	AWG #22~#24	1.60 (.063) MAX.	10,000 PCS.

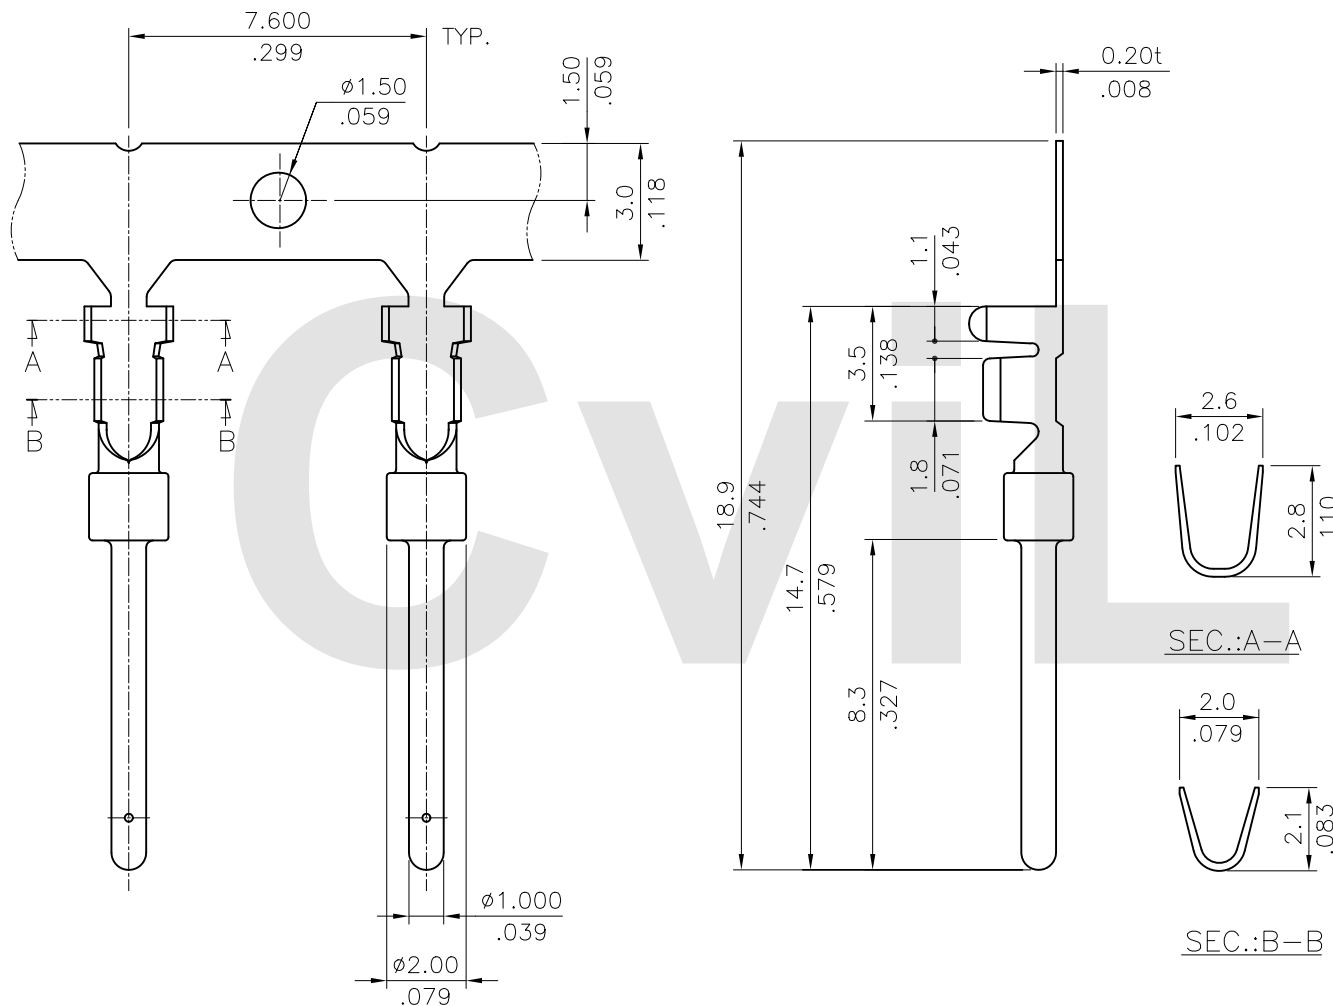

Ordering Code:

CD52 T 02 * B P P
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② T= Terminal
- ③ Crimping style:
02= for AWG # 22~ AWG #24
- ④ Plating option:
2= Gold flash plated over Nickel
A= Selective Gold flash plated over 1.27 μ m(50 μ ") Nickel
B= Selective 0.38 μ m(15 μ ") Gold plated over 1.27 μ m(50 μ ") Nickel
C= Selective 0.76 μ m(30 μ ") Gold plated over 1.27 μ m(50 μ ") Nickel
- ⑤ Material: B= Brass
- ⑥ Plating method: P= Post plating
- ⑦ Crimping terminal: P= Male

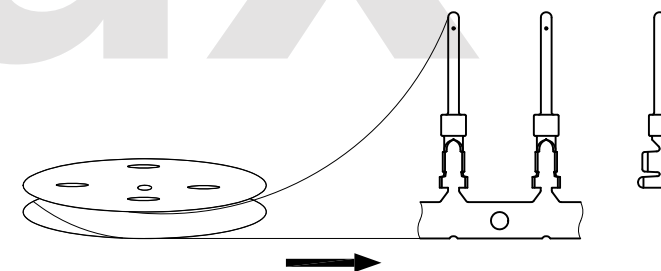

③ PULL OUT DIRECTION(PLATED)

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE:	 瀚荃股份有限公司 CviLux Corporation			
3	Karen	6/13-15'	ECNT115140/ECRT115017	DRAWN BY:	Karen	6/22-15'	CRIMP TERMINAL				
2	Sun	12/03-07	ECR07151-3/ECN07466	ENGINEER:	Sun	6/23-15'	MATERIAL:	DRAWING NO.	CD5203SF	PART NO.	CD52T02*BPP
1	Jessie	9/25/03'	ECN03317	CHECKED BY:	Eisley	6/23-15'	FINISH:				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	6/23-15'		SCALE	5 / 1	SHEET	1 OF 1

CVILUX CORP
2015.07.02
ISSUED

TOLERANCE
UNLESS OTHERWISE SPECIFIED

.X	± 0.20/.008	X' ± 1"
.XX	± 0.10/.004	X' ±
.XXX	± 0.05/.002	X' ±