


Port No.	Wire Range	Insulation Diameter	Reel Q'ty
CD52T02*PPS	AWG #22~#24	1.60 (.063) MAX.	10,000 PCS.

Ordering Code:

△ CD52 T 02 * P P S
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② T= Terminal
- ③ Crimping style:
02= for AWG # 22~ AWG #24
- ④ Plating option:
2= Gold flash plated over Nickel
A= Selective Gold flash plated over 1.27μm(50μ") Nickel
B= Selective 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
C= Selective 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
- △ ⑤ Material: P= Phosphor Bronze
- ⑥ Plating method: P= Post plating
- ⑦ Crimping terminal: S= Female

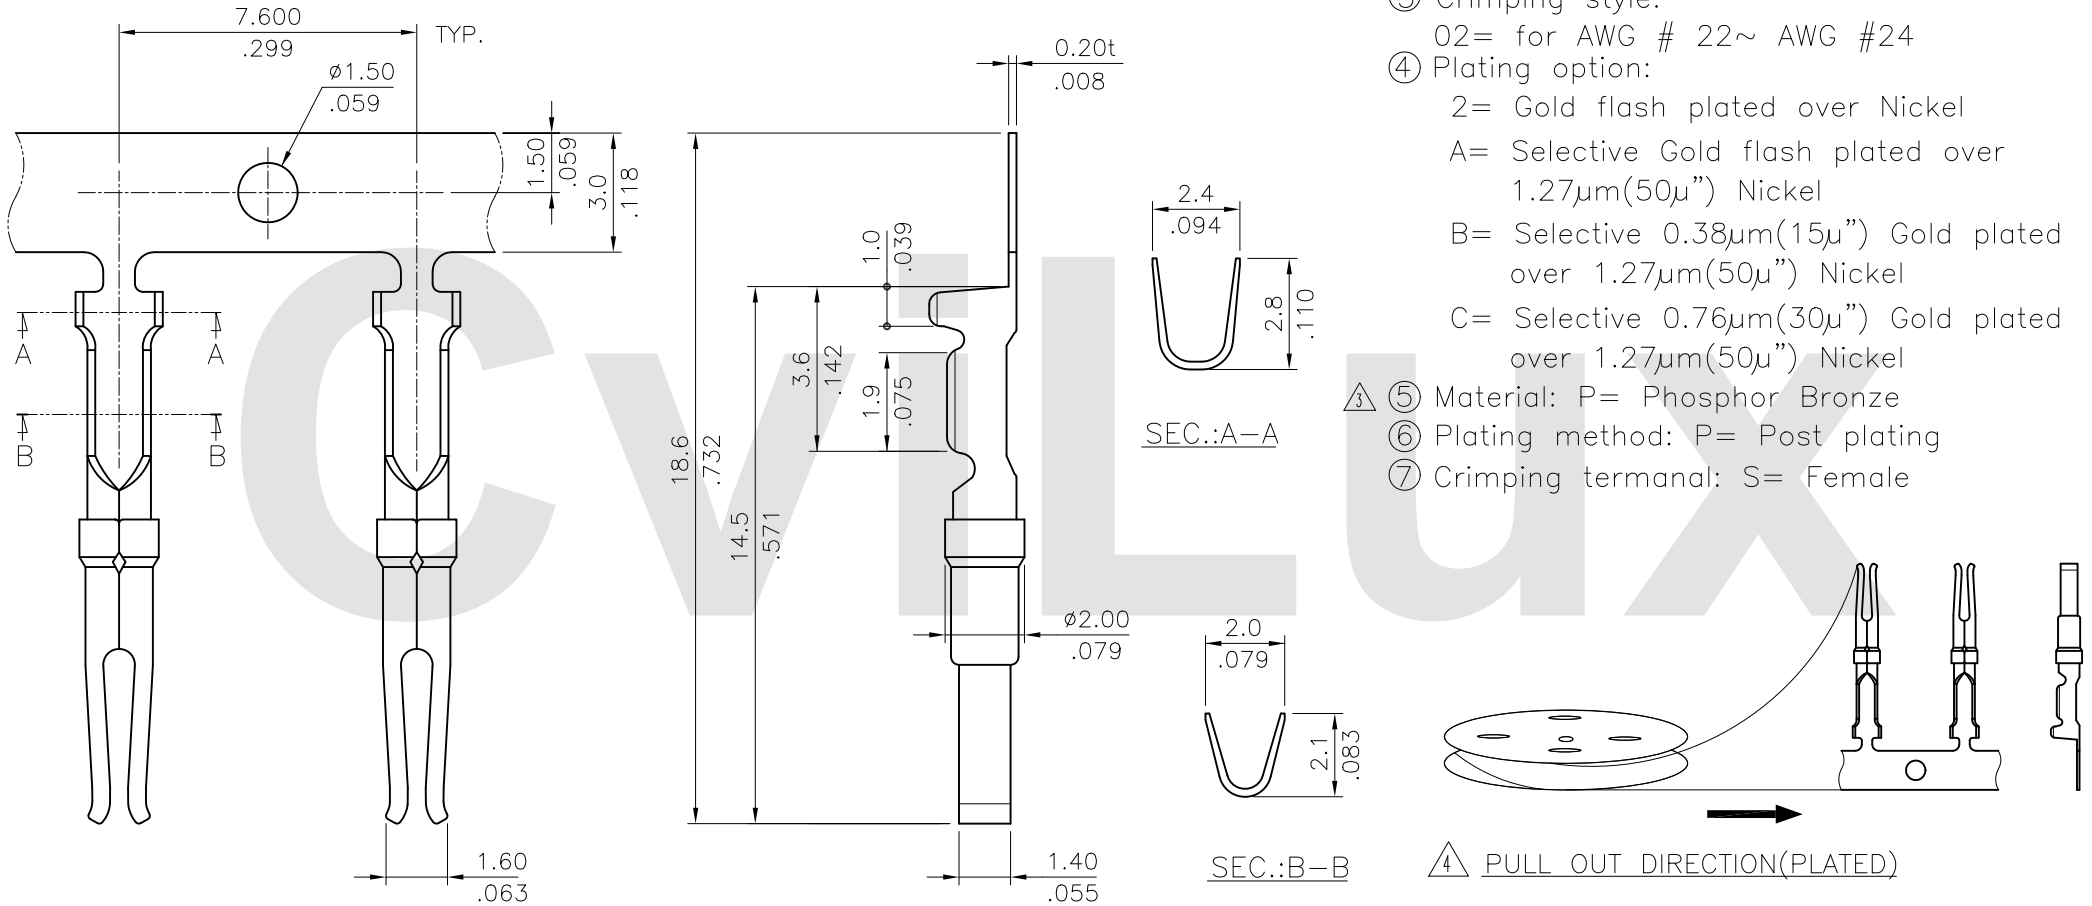

RoHS Compliant

△ 4	Karen	6/13-15'	ECNT115140/ECRT115017		DATE	UNIT: mm / inch	TITLE:	瀚荃股份有限公司 CviLux Corporation
△ 3	Sandy	3/18-09'	ECN09134	DRAWN BY:	Karen	6/22-15'	CRIMP TERMINAL	
△ 2	Sun	12/03-07'	ECR07151-3/ECN07466	ENGINEER:	Sun	6/23-15'	MATERIAL:	DRAWING NO. CD5204SF PART NO. CD52T02*PPS
△ 1	Jessie	9/25/03'	ECN03317	CHECKED BY:	Eisley	6/23-15'	FINISH:	
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	6/23-15'		SCALE 5 / 1 SHEET 1 OF 1

2015.07.02
ISSUED

TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X ± 0.20/.008	X* ± 1'
.XX ± 0.10/.004	.X* ±
.XXX ± 0.05/.002	.XX* ±