


Material:

Insulator: Glass filled Polyester UL 94V-0
Color Black or White

Contact: Brass

Shell: Steel, Tin plated as standard

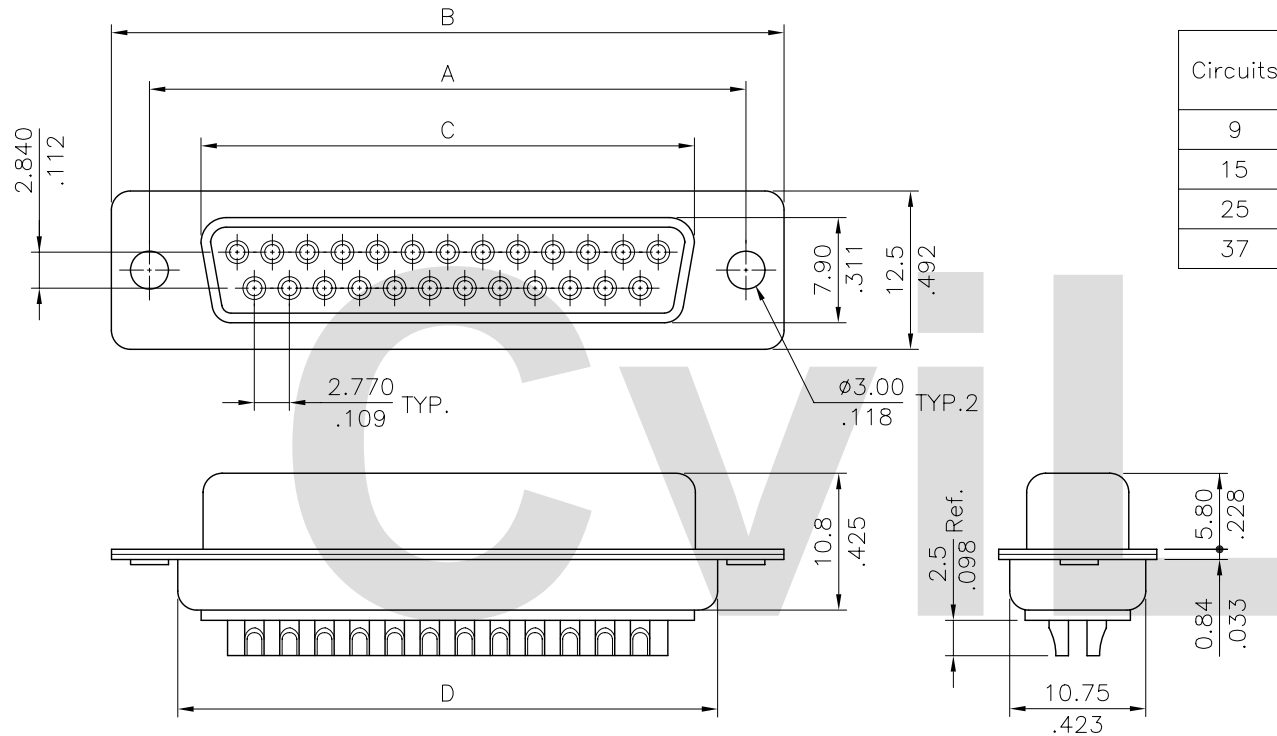

Circuits	Dimension			
	A	B	C	D
9	25.00(.984)	30.8(1.213)	16.30(.642)	19.2(.756)
15	33.32(1.312)	39.2(1.543)	24.60(.969)	27.6(1.087)
25	47.04(1.852)	53.1(2.091)	38.30(1.508)	41.1(1.618)
37	63.50(2.500)	69.4(2.732)	54.80(2.157)	57.3(2.256)

Ordering Code :

CD71 25 S * * 00
① ② ③ ④ ⑤ ⑥

- Series No.
- Contacts: 9,15,25,37
- Contact type : P=Plug , S=Receptacle
- Contact Plating :
 - 2 = Gold flash plated over 1.27um(50μ") Nickel (Standard)
 - 3 = 0.38um(15μ") Gold plated over 1.27um(50μ") Nickel
 - 4 = 0.76um(30μ") Gold plated over 1.27um(50μ") Nickel
 - 5 = 1.27um(50μ") Gold plated over 1.27um(50μ") Nickel
- Insulator Color :
1=Black , 0=White
- Other option :
00 = With ø3.00mm holes on shell

RoHS Compliant

4			CVILUX.CORP 2000.02.15 ISSUED			DATE	UNIT: mm / inch		TITLE: D-SUB SOLDER CUP MALE CONNECTOR (MACHINED CONTACT)	 瀚荃股份有限公司 CviLux Corporation		
3				DRAWN BY:	David	2/15 00'	TOLERANCE UNLESS OTHERWISE SPECIFIED					
2				ENGINEER:	David	2/15 00'	.X ±0.30/.012	X' ± 1'	MATERIAL:			
1				CHECKED BY:	Alex	2/15 00'	.XX ±0.20/.008	.X' ±			FINISH:	
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	2/15 00'	.XXX ±0.10/.004	.XX' ±		DRAWING NO. CD7102SB		PART NO. CD71**S**00
										SCALE	2 / 1	SHEET 1 OF 1