


Material:

Insulator: Glass filled Polyester UL 94V-0  
Color Black or White

Contact: Brass

Shell: Steel, Tin plated as standard

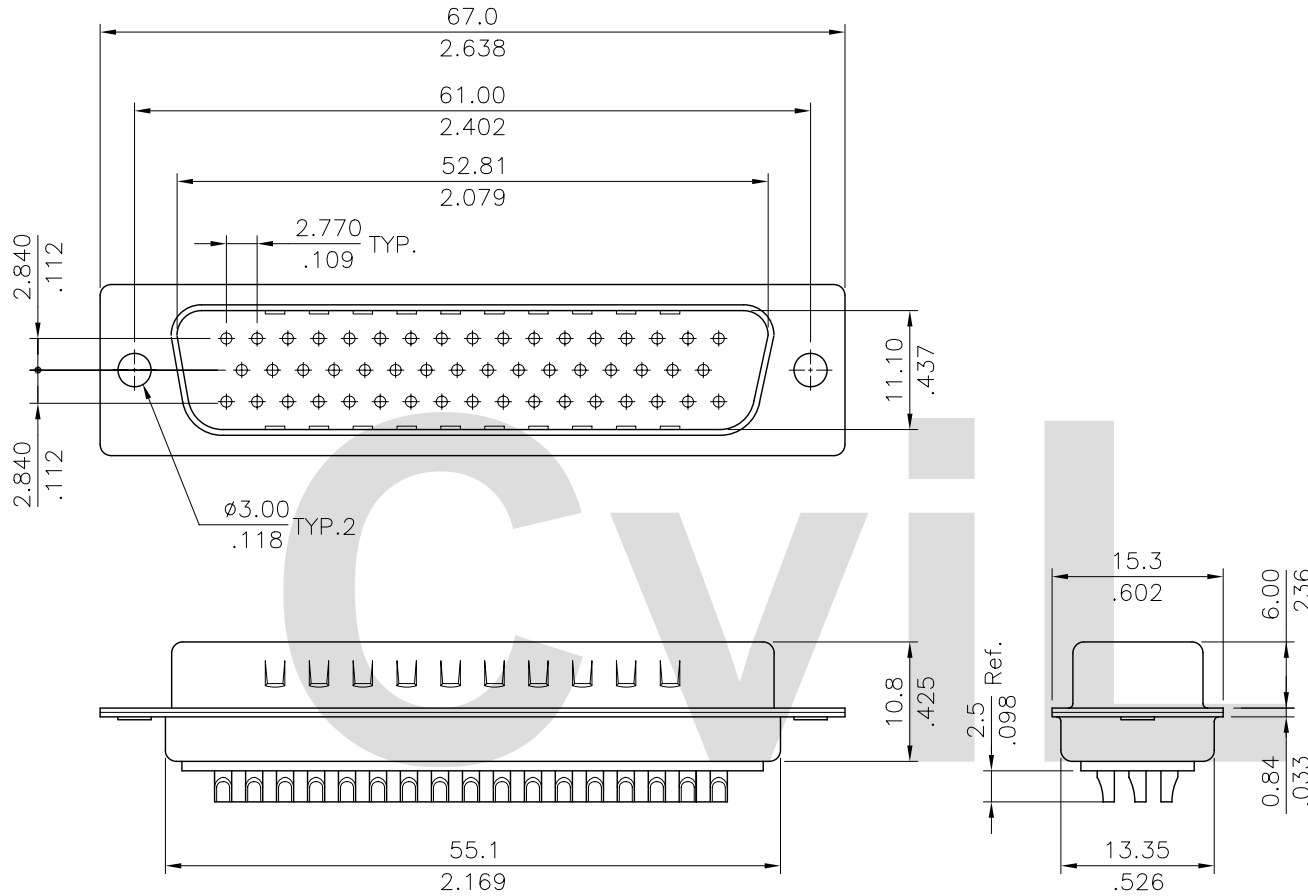


Ordering Code :

**CD71 50 P \* \* 00**  
① ② ③ ④ ⑤ ⑥

- Series No.
- Contacts: 50
- Contact type : P=plug , S=Receptacle
- Contact Plating :
  - 2 = Gold flash plated over 1.27 $\mu$ m(50 $\mu$ "") Nickel (Standard)
  - 3 = 0.38 $\mu$ m(15 $\mu$ "") Gold plated over 1.27 $\mu$ m(50 $\mu$ "") Nickel
  - 4 = 0.76 $\mu$ m(30 $\mu$ "") Gold plated over 1.27 $\mu$ m(50 $\mu$ "") Nickel
  - 5 = 1.27 $\mu$ m(50 $\mu$ "") Gold plated over 1.27 $\mu$ m(50 $\mu$ "") Nickel
- Insulator Color :
  - 1=Black , 0=White
- Other option :
  - 00 = With  $\phi 3.00$ mm holes on shell

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: D-SUB SOLDER CUP MALE CONNECTOR (MACHINED CONTACT)	 瀚荃股份有限公司 CviLux Corporation			
3					DRAWN BY: David	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:				
2					ENGINEER: David	.X $\pm 0.30/0.012$ X' $\pm 1'$	FINISH:	SCALE	2 / 1	SHEET	1 OF 1
1					CHECKED BY: Alex	.XX $\pm 0.20/0.008$ X' $\pm$					
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	2/15 00'	.XXX $\pm 0.10/0.004$ XX' $\pm$					

CVILUX.CORP  
 2000.02.15  
 ISSUED