


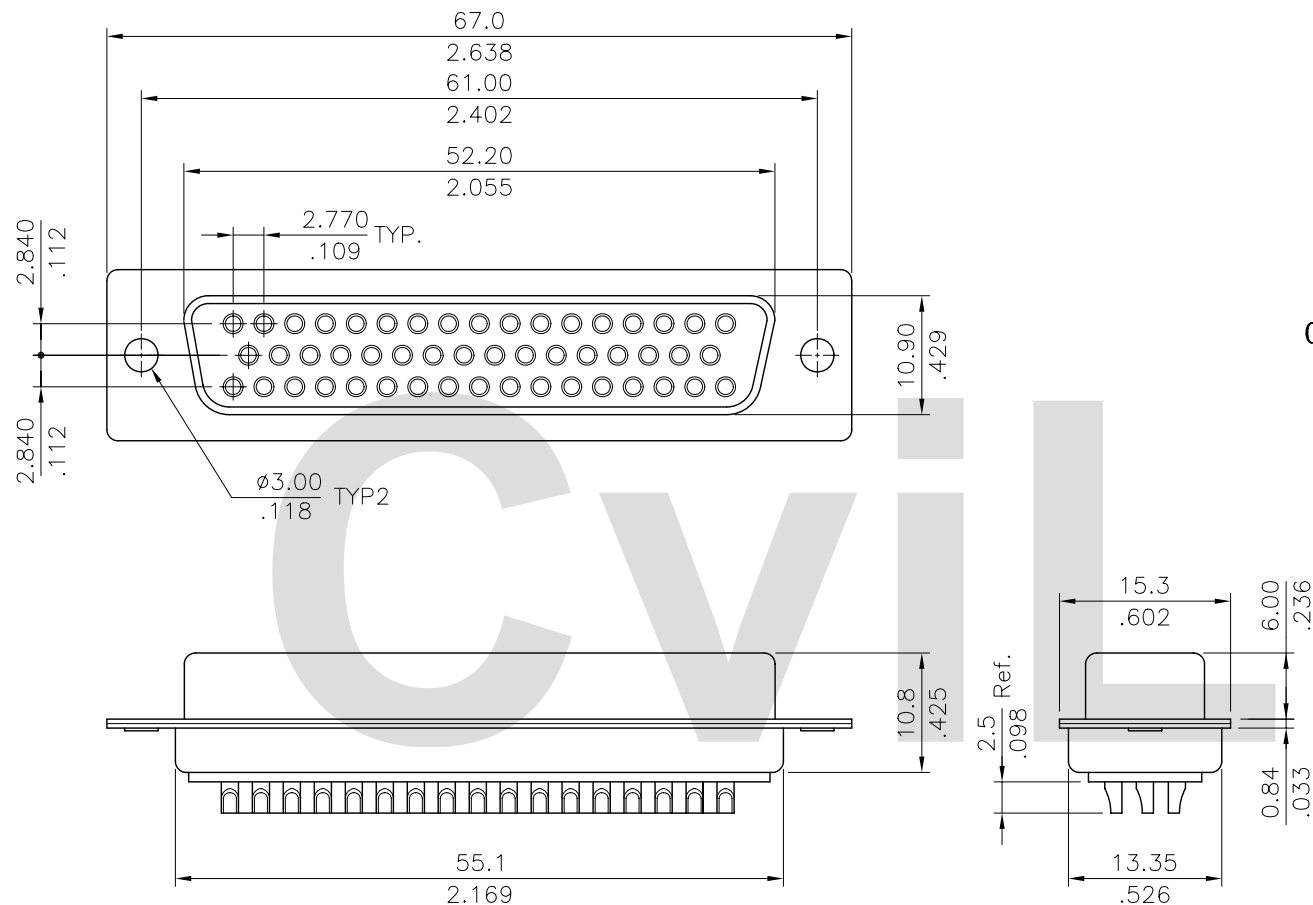

Material:

Insulator: Glass filled Polyester UL 94V-0

Color Black or White

Contact: Brass

Shell: Steel, Tin plated as standard

Ordering Code :

CD71 50 S * * 00
① ② ③ ④ ⑤ ⑥

1. Series No.
2. Contacts: 50
3. Contact type : P=plug , S=Receptacle
4. Contact Plating :
 - 2 = Gold flash plated over 1.27um(50μ")
 - Nickel (Standard)
 - 3 = 0.38um(15μ") Gold plated over
 - 1.27um(50μ") Nickel
 - 4 = 0.76um(30μ") Gold plated over
 - 1.27um(50μ") Nickel
 - 5 = 1.27um(50μ") Gold plated over
 - 1.27um(50μ") Nickel
5. Insulator Color :
 - 1=Black , 0=White
6. Other option :
 - 00 = With ø3.00mm holes on shell

RoHS Compliant

4						DATE	UNIT: mm / inch	TITLE: D-SUB SOLDER CUP FEMALE CONNECTOR (MACHINED CONTACT)	 瀚荃股份有限公司 CviLux Corporation			
3					DRAWN BY: David	2/15 00'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:				
2					ENGINEER: David	2/15 00'	.X ±0.30/.012 X" ± 1"		DRAWING NO. CD7104SB	PART NO.	CD7150S**00	
1					CHECKED BY: Alex	2/15 00'	.XX ±0.20/.008 X" ±		SCALE 2 / 1	SHEET 1	OF 1	
SYM	NAME	DATE	REVISIONS		APPROVED BY: Alex	2/15 00'	.XXX ±0.10/.004 .XX" ±	FINISH:				