


Material:

Insulator: Glass filled Polyester UL 94V-0  
Color Black or White

Contact: Brass

Shell: Steel, Tin plated as standard

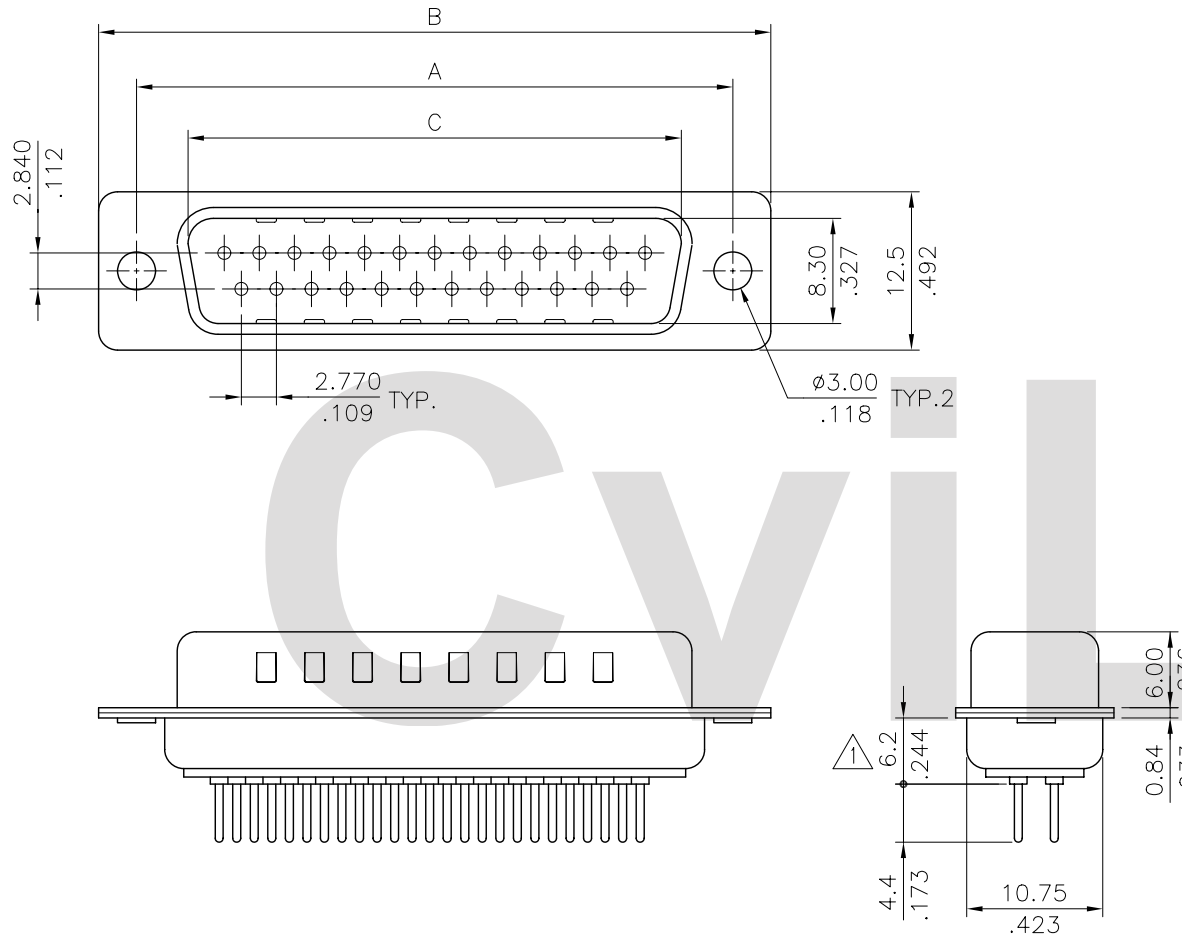

Circuits	Dimension		
	A	B	C
9	25.00(.984)	30.8(1.213)	16.92(.666)
15	33.32(1.312)	39.2(1.543)	25.25(.994)
25	47.04(1.852)	53.1(2.091)	38.96(1.534)
37	63.50(2.500)	69.4(2.732)	55.42(2.182)

Ordering Code :

**CD72 25 P \* \* 00**  
① ② ③ ④ ⑤ ⑥

- Series No.
- Contacts: 9,15,25,37
- Contact type : P=plug , S=Receptacle
- Contact Plating :
  - 2 = Gold flash plated over 1.27 $\mu$ m(50 $\mu$ ) Nickel (Standard)
  - 3 = 0.38 $\mu$ m(15 $\mu$ ) Gold plated over 1.27 $\mu$ m(50 $\mu$ ) Nickel
  - 4 = 0.76 $\mu$ m(30 $\mu$ ) Gold plated over 1.27 $\mu$ m(50 $\mu$ ) Nickel
  - 5 = 1.27 $\mu$ m(50 $\mu$ ) Gold plated over 1.27 $\mu$ m(50 $\mu$ ) Nickel
- Insulator Color :
  - 1=Black , 0=White
- Other option :
  - 00 = With ø3.00mm holes on shell

RoHS Compliant

SYM	NAME	DATE	REVISIONS	APPROVED BY:	DATE	UNIT: mm / inch	TITLE: D-SUB TOP ENTRY MALE CONNECTOR (MACHINED CONTACTOR)	DRAWING NO.	CD7201SD	PART NO.	CD72**P**00
4											
3											
2											
1	SUN	12/03/03'	ECN03437/ECR03056-0	CHECKED BY:	David	12/4 03'					
				APPROVED BY:	David	12/4 03'					
								SCALE	2 / 1	SHEET	1 OF 1

