


Material:

Insulator: Glass filled Polyester UL 94V-0

Color Black or White

Contact: Brass

Shell: Steel, Tin plated as standard

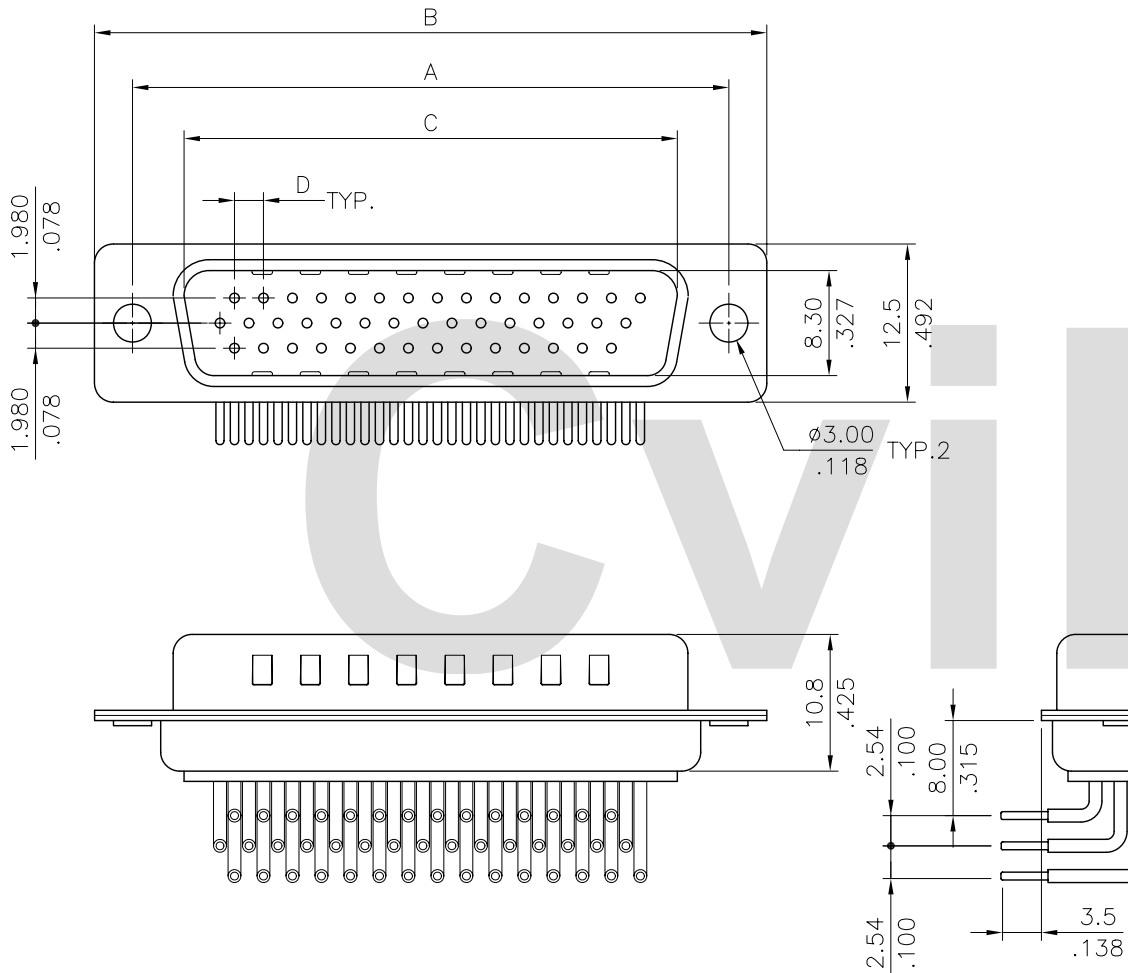


Circuits	Dimension			
	A	B	C	D
15	25.00(.984)	30.8(1.213)	16.92(.666)	2.290(.090)
26	33.32(1.312)	39.2(1.543)	25.25(.994)	2.290(.090)
44	47.04(1.852)	53.1(2.091)	38.96(1.534)	2.290(.090)
62	63.50(2.500)	69.4(2.732)	55.42(2.182)	2.410(.095)

Ordering Code :

CD77 44 P * * 00

① ② ③ ④ ⑤ ⑥

- Series No.
- Contacts: 15,26,44,62
- Contact type : P=plug , S=Receptacle
- Contact Plating :
 - 2 = Gold flash plated over 1.27 μ m(50 μ) Nickel
 - 3 = 0.38 μ m(15 μ) Gold plated over 1.27 μ m(50 μ) Nickel
 - 4 = 0.76 μ m(30 μ) Gold plated over 1.27 μ m(50 μ) Nickel
 - 5 = 1.27 μ m(50 μ) Gold plated over 1.27 μ m(50 μ) Nickel
- Insulator Color :
 - 1=Black , 0=White
- Other option :
 - 00 = With ϕ 3.00mm holes on shell

④					DATE	UNIT: mm / inch	TITLE: HIGH DENSITY D-SUB SOLDER PIN RIGHT ANGLE MALE CONNECTOR (MACHINED CONTACT)	 瀚荃股份有限公司 CviLux Corporation
③					DRAWN BY: David	8/31 00'	TOLERANCE UNLESS OTHERWISE SPECIFIED	
②					ENGINEER: David	8/31 00'	.X \pm 0.30/.012 X' \pm 1'	
①					CHECKED BY: Alex	8/31 00'	.XX \pm 0.20/.008 X' \pm	
SYM	NAME	DATE	REVISIONS		APPROVED BY: Alex	8/31 00'	.XXX \pm 0.10/.004 .XX \pm	
								DRAWING NO. CD7701SA
								PART NO. CD77**P**00
								SCALE 2 / 1
								SHEET 1 OF 1

