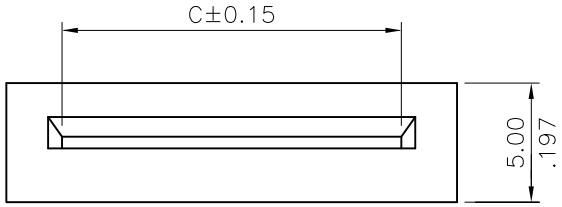

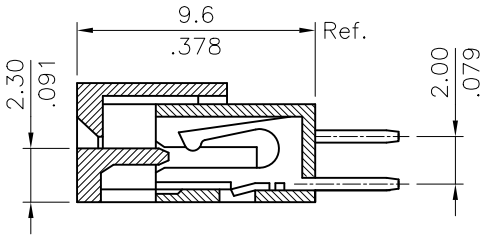

Material:
* Insulation: Glass filled polyester UL 94V-0
* Contact: Phosphor Bronze

Ordering Code

CF01	**	1	V	0	00
①	②	③	④	⑤	⑥

①Series No.
②No. of Circuits
③Plating code:
1= Tin plated over Nickel
④Entry option: V= Straight
⑤Color: 0= Nature
⑥Other options: 00= Standard

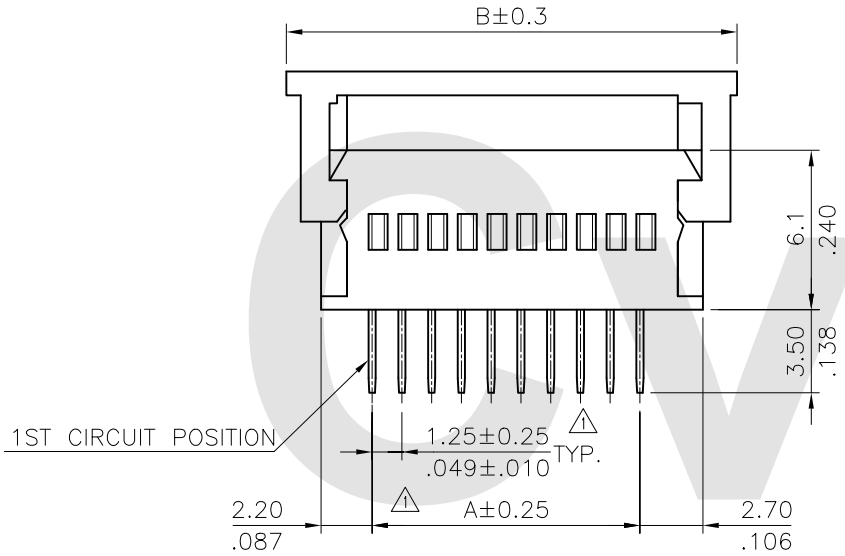

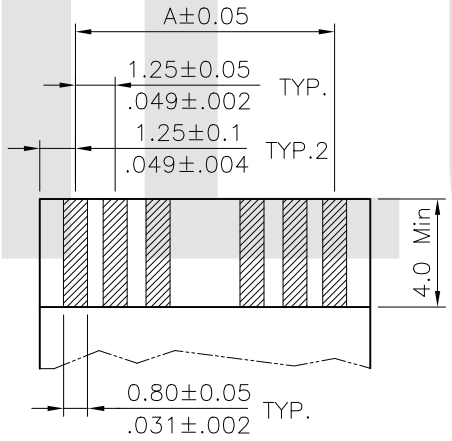

Accommodated FPC/FFC
(Thickness: 0.3mm±0.05)

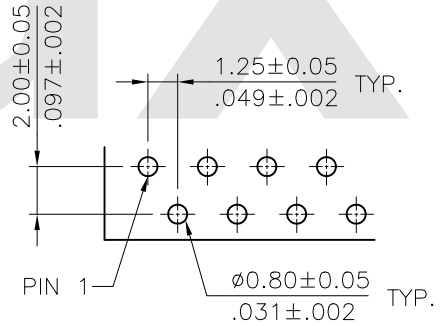

Recommended P.C. Board Layout

A = 1.25 * No. of Spaces
B = A + 7.05
C = A + 2.7
△2 * Available in 3 through 31 circuits

RoHS Compliant

SYM	NAME	DATE	REVISIONS
△4			CVILUX CORP 2015.09.10 ISSUED
△3			
△2	Karen	9/03-15'	ECNT115199/ECRT115075
△1	Karen	10/1-08'	ECN08494/ECR08076-0

		DATE
DRAWN BY:	Karen	9/03-15'
ENGINEER:	Sun	9/04-15'
CHECKED BY:	Eisley	9/04-15'
APPROVED BY:	Eisley	9/04-15'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X ± 0.25/.010	X.° ± 1°
.XX ± 0.15/.006	.X° ±
.XXX ± 0.08/.003	.XX° ±

TITLE: 1.25mm(.049") ZIF FFC/FPC SOCKET
MATERIAL:
FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CF0103SC	PART NO.	CF01**1V000
SCALE	3 / 1	SHEET 1 OF 1	