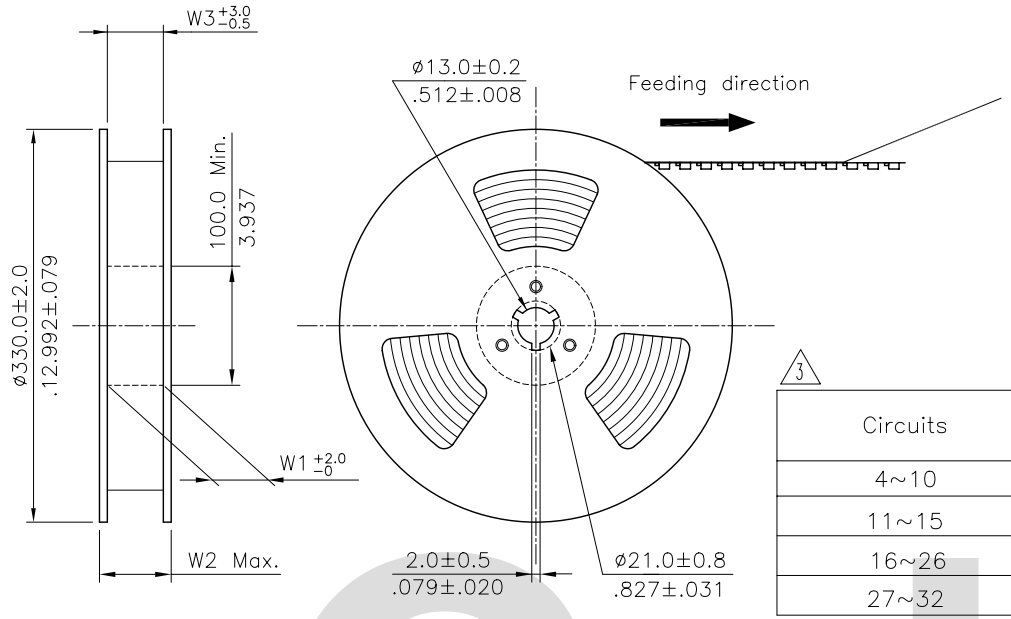

NOTE :

* Reel Material : HIPS
* Carrier Material : Clear, Conductive Polystyrene Alloy
* Cover Tape Material : Polyester
* Cover Tape Peel Strength : 0.1N – 1.3N
* Carrier camber is within 1mm in 250mm
* All dimensions meet EIA–481–B requirements.
* Quantity : 800 PCS/Reel

3

Circuits	Dimension					Packing (Reel/Caton)
	E	F	W1	W2	W3	
4~10	24.0(.945)	–	24.5(.965)	30.5(1.201)	24.5(.965)	9
11~15	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
16~26	44.0(1.732)	40.40(1.591)	44.5(1.752)	50.5(1.988)	44.5(1.752)	5
27~32	56.0(2.205)	52.40(2.063)	56.5(2.224)	62.5(2.461)	56.5(2.224)	3

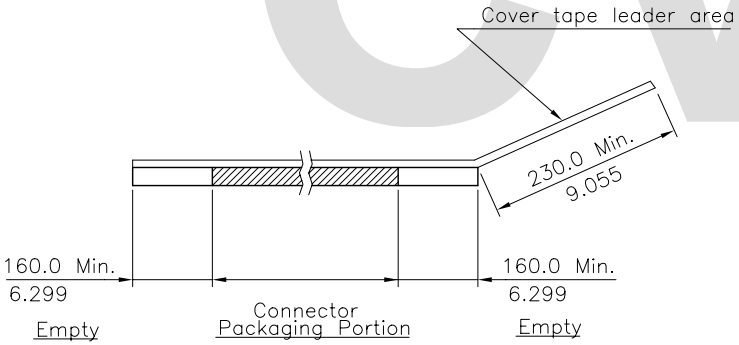

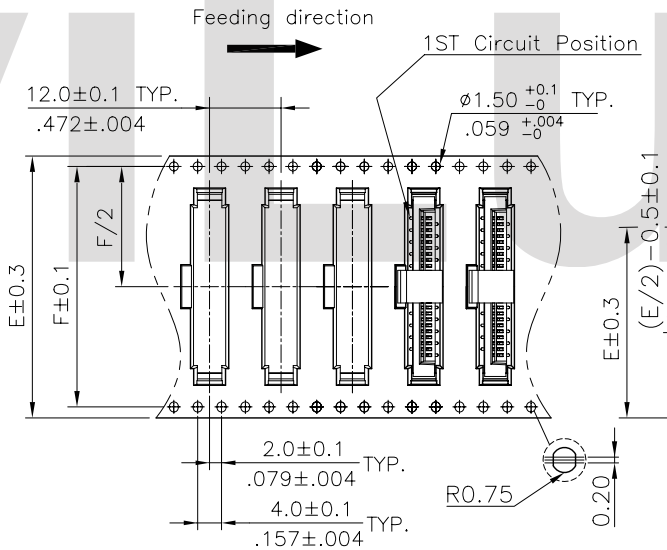

WIDTH : 32, 44 & 56 mm Carrier

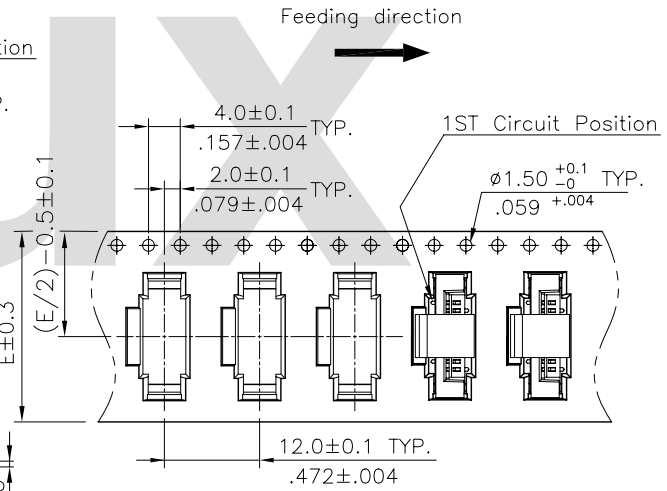

WIDTH : 24 mm Carrier

SYM	NAME	DATE	REVISIONS
4			
3	Eager	6/8/06'	ECN06171
2	SUN	4/27/05'	ECR05029-1/ECN05140
1	SUN	12/20/04	ECR04068-1/ECN04507

CVILUX CORP. 2006.07.03 ISSUED

		DATE
DRAWN BY:	Eager	06/27-06'
ENGINEER:	Eisley	06/27-06'
CHECKED BY:	David	06/27-06'
APPROVED BY:	Alex	06/27-06'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ±	X.° ± 1°
.XX ±	.X° ±
.XXX ±	.XX° ±

TITLE: TAPE & REEL PACKAGING FOR CF10 SERIES SMT TYPE

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CF1009SE	PART NO.	
SCALE		SHEET 1 OF 1	