




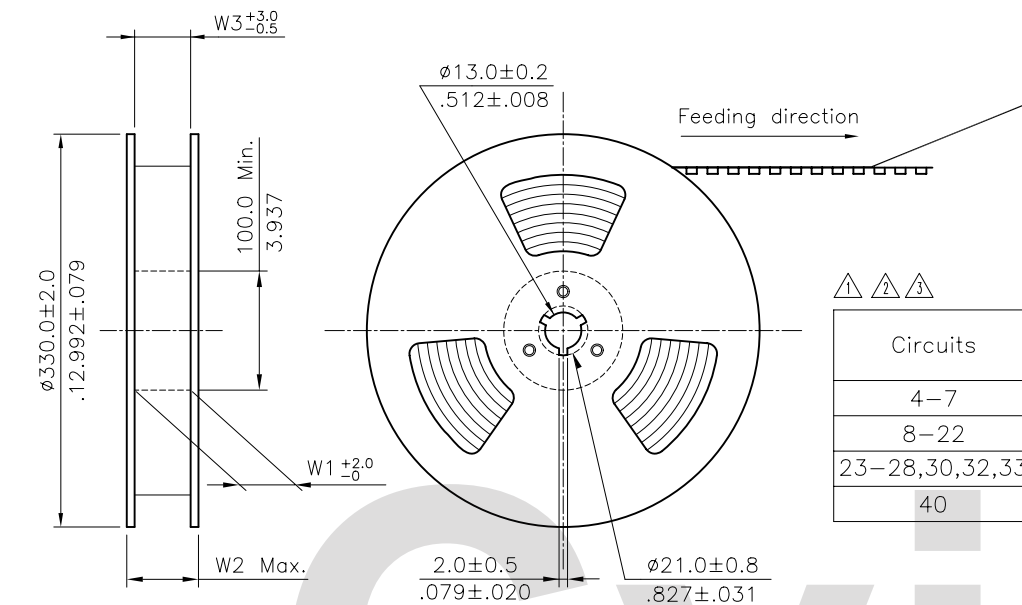


NOTES:


1. 10 sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1 mm in 250 mm.
3. Material : Clear,Transparent Polystyrene Alloy (UP-6000).
4. All dimensions meet EIA-481-B requirements.
5. Thickness : 0.40 ± 0.05 mm.
6. Packing length per 22" reel : 98.5 Meters.
7. Component load per 13" reel : 4000 pcs.



Circuits	Dimension					Packing (Reel/Caton)
	E	F	W1	W2	W3	
4-7	16.0(.630)	-	16.5(.650)	22.5(.886)	16.5(.650)	11
8-22	24.0(.945)	-	24.5(.965)	30.5(1.201)	24.5(.965)	9
23-28,30,32,33	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
40	44.0(1.732)	40.40(1.596)	44.5(1.751)	50.4(1.984)	44.5(1.751)	5

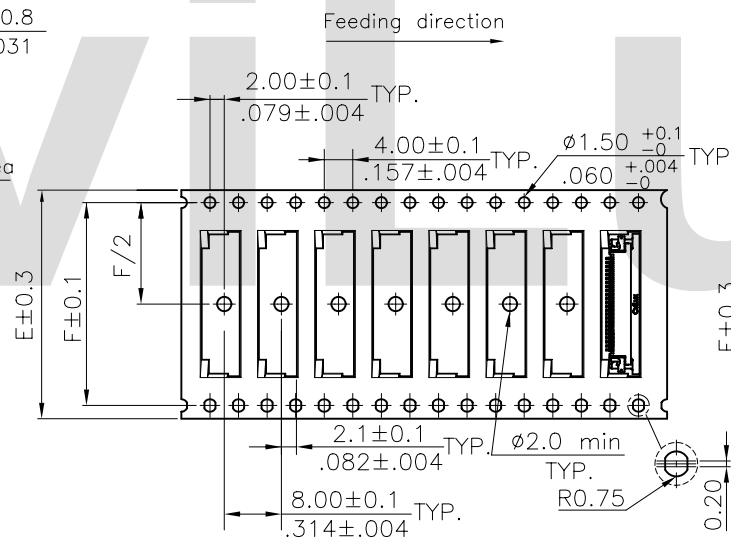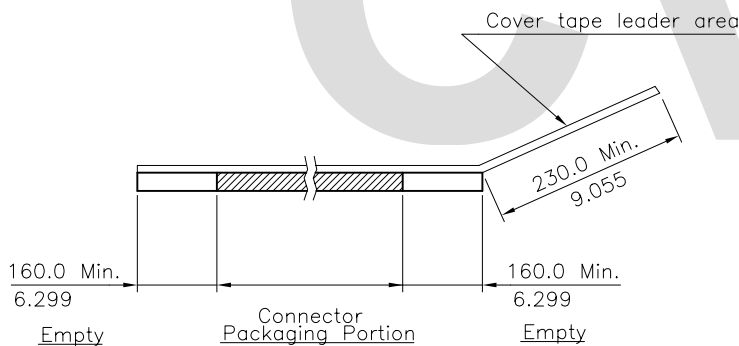

WIDTH : 32, 44 mm Carrier

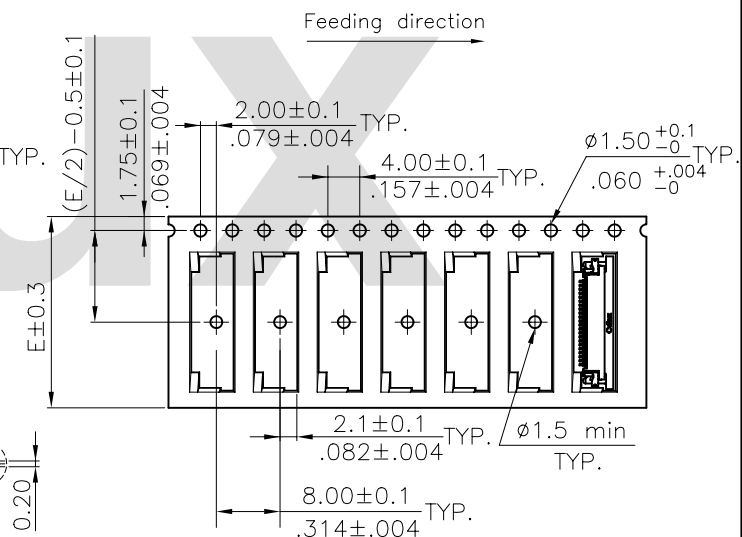

WIDTH : 16, 24 mm Carrier

4					DATE	UNIT: mm / inch	TITLE: TAPE & REEL PACKAGING FOR CF23 SERIES SIDE ENTRY TYPE	 瀚菱股份有限公司 CviLux Corporation		
3	Sun	9/21-06'	ECN06342	DRAWN BY:	Sun	9/22-06'	TOLERANCE UNLESS OTHERWISE SPECIFIED			
2	Sun	6/09-05'	ECN05209	ENGINEER:	Eisley	9/22-06'	.X ±	.X' ±	MATERIAL:	DRAWING NO. CF2307SD
1	Jason	4/01-04'	ECN04134	CHECKED BY:	David	9/22-06'	.XX ±	.X' ±	FINISH:	PART NO.
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	9/22-06'	.XXX ±	.XX' ±		SCALE
									SHEET 1 OF 1	